


LTW® Innovator & Manufacturer of Waterproof and Environmental-Proof World

Body is made of Nylon + GF and it is UL Recognized

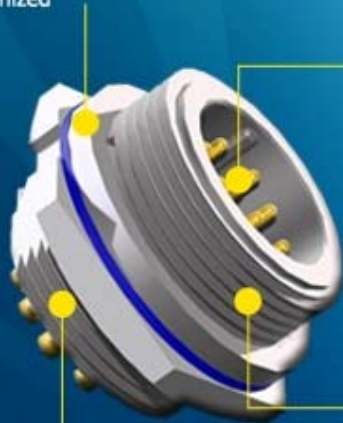

Pins are made of Brass with Ni Plated / 6µ Gold Plated

The screw coupling connection provides a protection and proven locking system.

New rear mounting design for fast and secure installation



Mini-Size



Standard Size



Middle Size




Large Size

* Also available from Mini to Large Size in 2-14 and 2-22 pins ranging from 2A to 20A

CIRCULAR

REAR MOUNT

IP 67~68
Connector Body -40°C to +105°C
≤ 10 mΩ
≥ 100 MΩ at DC 500V
2A, 5A, 10A, 20A
≥ AC 1000V / 1 Minute, ≥ 500V / 1 Minute (1.5A~5A)
48 Hours Salt Spray Contact
3000 Plug / Unplug Cycles Minimum



For more information, contact us to : bce@bce.it ; or browse into our website : www.bce.it

(January, 2007)