

FULL METAL HOODS

MHDCMR-SERIES


TECHNICAL SPECIFICATIONS

Material:	Zinc Alloy, Thermoplastic Compound
Operating Temperature:	-40°C to +120°C
Cable Entry:	Side Entry 90°
Thumbscrews:	UNC 4-40
Plating:	Bright Nickel Plating
Cable Diameter:	From 5,3 mm up to 18,4 mm



Features:

- Available in sizes 9, 15, 25 and 37-way
Size 50 on request
- Suitable for any common Sub-D connector
- Re-Openable
- Compression Inserts in Thermoplastic Compound
- Low Profile / Ultra Low Profile Hood

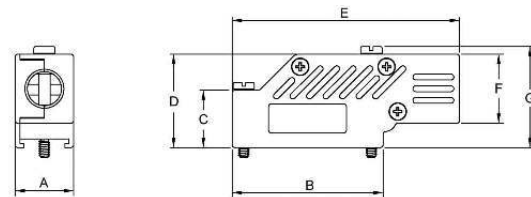

Order codes:		
9-way	1060-0135-01	MHDCMR09-ULP
15-way	1060-0135-02	MHDCMR15-ULP
25-way	1060-0135-03	MHDCMR25-ULP
37-way	1060-0135-04	MHDCMR37-ULP
50-way	1060-0135-05	MHDCMR50-ULP

Size	A	B	C	D	E	F	G
9	15,0	30,8	15,0	24,4	50,8	18,0	26,2
15	15,2	39,4	15,0	24,4	59,3	18,0	26,4
25	15,8	53,3	23,1	34,5	72,4	24,3	36,6
37	15,8	69,9	23,1	40,9	89,7	30,7	42,9
50	18,0	67,1	-	40,9	86,9	30,7	42,9

Slide Lock Version:

- Material as above ULP-version
- Available in size 9

Order codes:		
9-way	1060-0135-11	MHDCMR09-SL



Measurement as in above ULP-Version



For more information, contact us to: bce@bce.it ; or browse into our website: www.bce.it

(October, 2009)