

FULL METAL HOODS

MHDTSL-SERIES

TECHNICAL SPECIFICATIONS




Material:	Zinc
Operating Temperature:	-40°C to +120°C
Cable Entry:	Top or Side Entry
Plating:	Nickel Plating
Cable Diameter:	Up to 13,0 mm
Accessories:	See page 120
Assembly Instructions:	See page 155



Features:

- Jackscrew Version
- Available in sizes 9- only
- Excellent EMI Shielding
- Re-openable

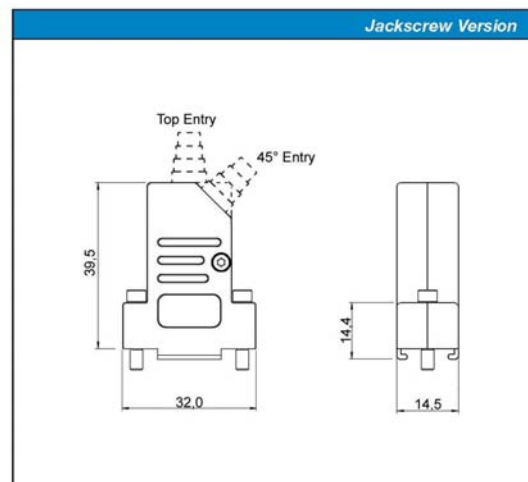

Ordering information: MHDTSL-JSFR		
Size:	P/N - Kitted:	Product Code:
9-way-TOP	6560-0237-31	MHDTSL09-JSFR-T-K
9-way-SIDE	6560-0238-31	MHDTSL09-JSFR-S-K
Size:	P/N - BULK:	Product Code:
9-way-TOP	6561-0237-31	MHDTSL09-JSFR-T
9-way-SIDE	6561-0238-31	MHDTSL09-JSFR-S

Ordering information: MHDTSL-JS		
Size:	P/N - Kitted:	Product Code:
9-way-TOP	6560-0207-31	MHDTSL09-JS-T-K
9-way-SIDE	6560-0208-31	MHDTSL09-JS-S-K
Size:	P/N - BULK:	Product Code:
9-way-TOP	6561-0207-31	MHDTSL09-JS-T
9-way-SIDE	6561-0208-31	MHDTSL09-JS-S



For more information, contact us to: bce@bce.it ; or browse into our website: www.bce.it

(October, 2009)

B.C.E. S.r.l. - Via Regina Pacis, 54/c - I 41049 Sassuolo (MO), Italy

Tel: (+39) 0536 811616

Fax: (+39) 0536 811500

E-mail: bce@bce.it

Web: www.bce.it