

SHIELDED HOODS TOP ENTRY

DTPK/DTPK I-SERIES

TECHNICAL SPECIFICATIONS

Material:
 Plastic Hood: Polyamid – UL-recognised
 Metal Hood: Steel, Zinc plated metal insert

Operating Temperature: -55°C to +110°C

Cable Entry: Top Entry


Thumbscrews: UNC 4-40 (standard)
 M2,5 or M3,0 on request

Cable Diameter: Up to 13,0 mm

Colour: Black (standard)
 Other colours on request

Accessories: See page 120

Assembly Instructions: See page 153-154



Features:



- Available in sizes 9-15-25-37
- Suitable for IDC connectors
- Quick-Snap locking system
- Crimping method ensures a 360° shielding

Ordering information:

Size:	P/N - Kitted:	Product Code:
9-way	6260-0120-xx	DTK09I-[size] + DTPK09I-JS
15-way	6260-0121-xx	DTK15I-[size] + DTPK15I-JS
25-way	6260-0122-xx	DTK25I-[size] + DTPK25I-JS
37-way	6260-0123-xx	DTK37I-[size] + DTPK37I-JS

Size DTK/DTPK	Dim A	Dim B	Dim C
9-way	35,0	54,0	19,0
15-way	43,0	54,0	19,0
25-way	54,0	53,0	18,0
37-way	74,0	54,0	19,0

Code for correct ferrule:

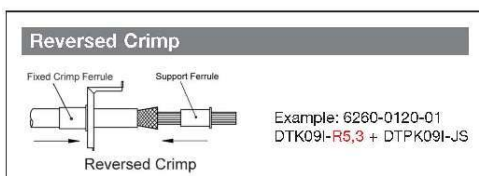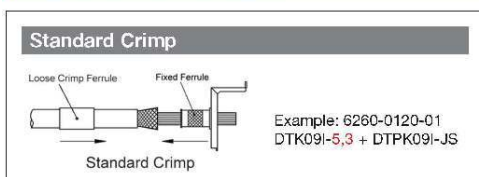

Cable O.D	Size	Order Code xx	Suits Hood size
Up to 7 mm	5,3	-01	9-15-25-37
6,8-8,6 mm	6,0	-02	9-15-25-37
8,4-9,8 mm	7,0	-03	9-15-25-37
9,6-10,3 mm	7,5	-04	9-15-25-37
10,1-11,0 mm	8,6	-05	9-15-25-37
10,8-13,8 mm	11,7	-06	9-15-25-37

Cable O.D	Size	Order Code xx	Suits Hood size
Up to 5,1 mm	R5,3	-10	9-15-25-37
4,3-6,9 mm	R7,1	-12	9-15-25-37
6,1-8,8 mm	R9,0	-14	9-15-25-37
8,0-10,3 mm	R10,5	-15	9-15-25-37
9,5-11,5 mm	R11,7	-16	9-15-25-37



For more information, contact us to: bce@bce.it ; or browse into our website: www.bce.it

(October, 2009)

B.C.E. S.r.l. - Via Regina Pacis, 54/c - I 41049 Sassuolo (MO), Italy

Tel: (+39) 0536 811616

Fax: (+39) 0536 811500

E-mail: bce@bce.it

Web: www.bce.it