




## Elastomer Socket for ASE's 1521L HFC BGA

### ***Socket your 1mm pitch BGA1521 using GHz bandwidth elastomer socket***

EAGAN, MN - February, 2013 - Ironwood Electronics has recently introduced a new high performance BGA socket for 1mm pitch 1521 ball BGA - SG-BGA-8030. The socket operates at bandwidths up to 10 GHz with less than 1dB of insertion loss. The contact resistance is typically 20 milliohms per I/O. The socket connects all pins with 10 GHz bandwidth on all connections. The socket is mounted using supplied hardware on the target PCB with no soldering, and uses smallest footprint in the industry. The socket incorporates a heat sink and a fan to dissipate 60 Watts. The socket also features integrated compression mechanism to socket lid enabling easy change of BGAs. The specific package sizes accommodated by the socket are 1mm pitch 40mm x 40mm, 39x39 ball array. To use, drop IC into the socket, and apply down force using heat sink compression socket lid.

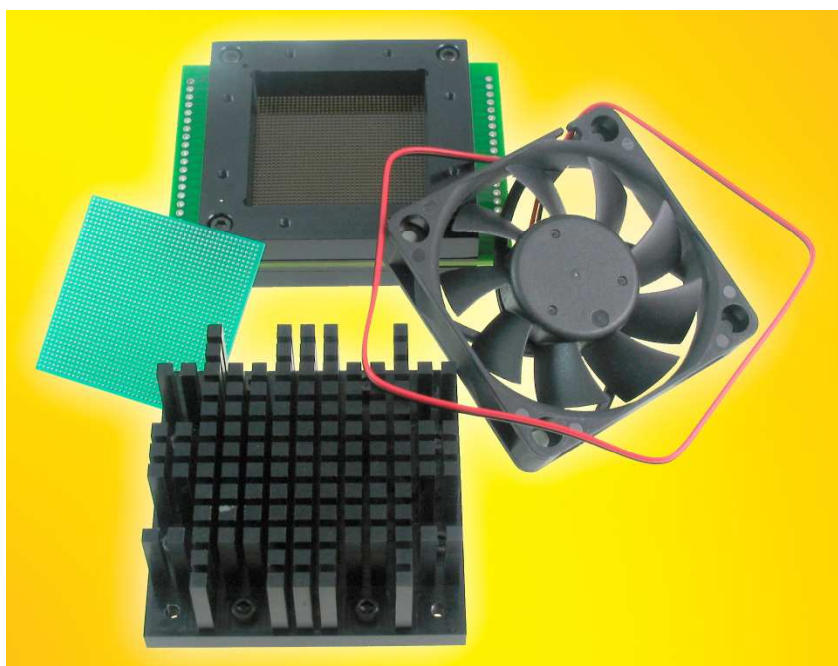

The SG-BGA-8030 sockets are constructed with high performance and low inductance gold plated embedded wire on elastomer as interconnect material between device and PCB. The temperature range is -35°C to +100°C. The pin self inductance is 0.15 nH and mutual inductance of 0.025 nH. Capacitance to ground is 0.01 pF. Current capacity is 2 amps per pin.

(February, 2013)

**B.C.E. S.r.l.** - Via Regina Pacis, 54/c - I 41049 Sassuolo (MO), Italy

Tel: (+39) 0536 811616

Fax: (+39) 0536 811500

E-mail: [bce@bce.it](mailto:bce@bce.it)

Web: [www.bce.it](http://www.bce.it)