


SFP Series

■ Product Features:

- 0.8mm Pitch and 20Pins
- High Speed SMT Connector
- Light Pipe Option
- Direct Attach Copper Cable
- Hot Swappable
- Chassis Ground for Pass through EMI Protection to 12.5 Gbps
- Three Stage Sequencing-GND, VDD, Signal
- IEEE 802.3z (Gigabit Ethernet), INCITS T11 (FC)
- Connector Support Data Rates Beyond 5 Gbps

■ Recommended Applications:

- Networking Switch and Router
- Fast/Gigabit Ethernet
- ATM/SONET/SDH
- Computer Server
- Host Equipment
- Storage System
- Fiber Channel
- InfiniBand (IB)
- FDDI

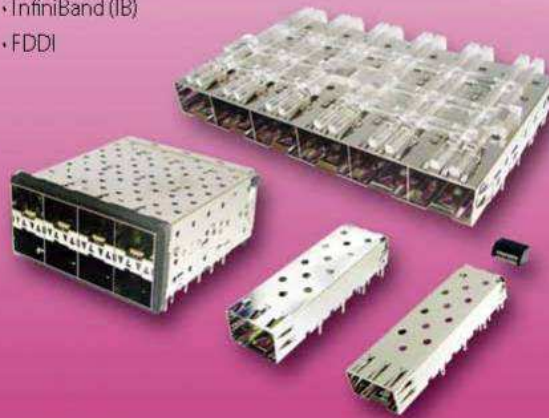

...d Series • External PCI-Express Series • External Mini SAS Series • SCSI II & III Series



For more information, contact us to: bce@bce.it ; or browse into our website: www.bce.it

(July, 2010)

B.C.E. S.r.l. - Via Regina Pacis, 54/c - I 41049 Sassuolo (MO), Italy

Tel: (+39) 0536 811616

Fax: (+39) 0536 811500

E-mail: bce@bce.it

Web: www.bce.it