
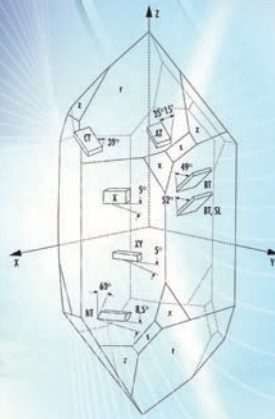


FREQUENCY CONTROL PRODUCTS

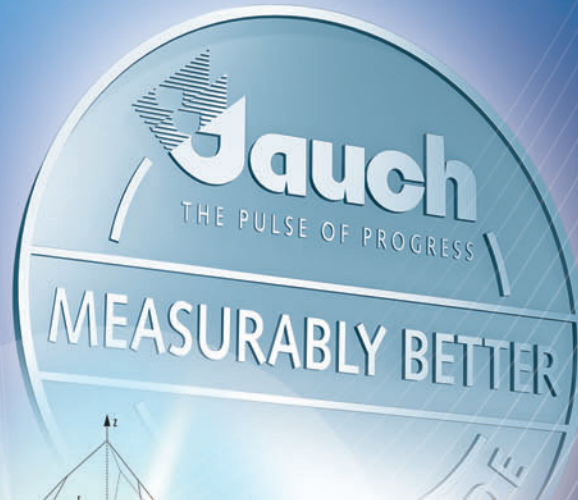

JAUCH CRYSTAL OSCILLATORS

individual working copy

03/11/14

THE SPECIALIST FOR FREQUENCY CONTROL PRODUCTS






The Specialist
for frequency control products

Worldwide Presence
expert advice by
quartz crystal specialists

Technical Customer Support
by field application engineers

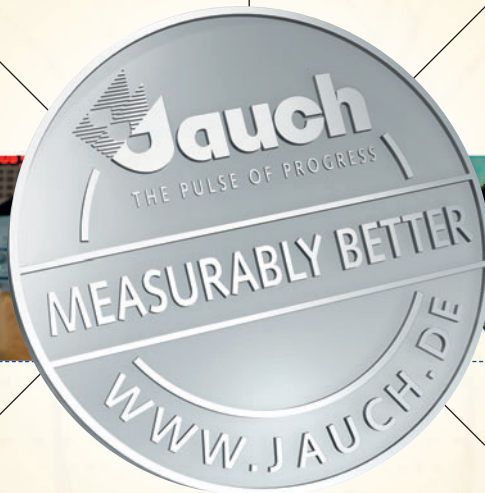

Standard and Customized
quartz crystal products

High Product Availability
with over 28 million
components in stock

Flexibility and Reliability
by our own international
production facilities

- www.jauch.de
- www.jauch.fr
- www.jauchusa.com
- www.jauch.co.uk

SMD - JXG Series	Type	Frequency range	Size	PDF	Information
JXG12P4	4 Pad Version	13.0 - 50.0 MHz	3.2 x 2.5 x 1.0 mm		<ul style="list-style-type: none"> automotive temperature range available high mechanical reliability type available glass sealing contains small amount of Pb in accordance with RoHS directive exemption No 7
JXG13P4	4 Pad Version	8.0 - 60.0 MHz	5.0 x 3.2 x 1.5 mm		<ul style="list-style-type: none"> automotive temperature range available high mechanical reliability type available glass sealing contains small amount of Pb in accordance with RoHS directive exemption No 7
JXG15P2	2 Pad Version preferred type	8.0 - 60.0 MHz	5.0 x 3.2 x 1.5 mm		<ul style="list-style-type: none"> automotive temperature range available
JXG17P4	4 Pad Version	5.0 - 70.0 MHz	7.0 x 5.0 x 1.8 mm		
JXG17P2	2 Pad Version preferred type	5.0 - 70.0 MHz	7.0 x 5.0 x 1.8 mm		
JXG18P2	2 Pad Version	6.0 - 60.0 MHz	8.0 x 4.5 x 1.4 mm		

THE SPECIALIST FOR FREQUENCY CONTROL PRODUCTS

Index

VX3 (5.0 V) Tristate Function	6
VX3 (3.3 V) Tristate Function	8
VX3 (3.3 V) Stop Function	10
VX3 (2.8 V) Stop Function	12
VX3 (2.5 V) Stop Function	14
VX3 (1.8 V) Stop Function	16
JO75 (5.0 V)	18
JO75H (5.0 V)	20
JO75 (3.3 V)	22
JO75H (3.3 V)	24
JO75 (3.3 V)	26
JO75 (2.8 V)	28
JO75 (2.5 V)	30
JO75 (1.8 V)	32
JO53 (5.0 V)	34
JO53 (3.3 V)	36
JO53H (3.3V)	38
JO53 (3.0V)	40
JO53 (2.8 V)	42
JO53 (2.5 V)	44
JO53H (2.5V)	46
JO53 (1.8 V)	48
JO32 (3.3 V)	50
JO32H (3.3V)	52
JO32 (3.0V)	54
JO32 (2.8 V)	56
JO32 (2.5 V)	58
JO32H (2.5V)	60
JO32 (1.8 V)	62
JO32H (1.8V)	64



Index

JO22 (3.3 V)	66
JO22H (3.3V)	68
JO22 (3.0V)	70
JO22 (2.8 V)	72
JO22 (2.5 V)	74
JO22H (2.5V)	76
JO22 (1.8V)	78
JO22H (1.8V)	80
JPO75 (3.3V)	82
JPO75 (2.5V)	84
JPO75 (1.8V)	86
JPO53 (3.3V)	88
JPO53 (2.5V)	90
JPO53 (1.8V)	92
JPO32 (3.3V)	94
JPO32 (2.5V)	96
JPO32 (1.8V)	98
JPO22 (3.3V)	100
JPO22 (2.5V)	102
JPO22 (1.8V)	104
JV75 (5.0 V)	106
JV75 (3.3 V)	108
JV53 (3.3 V)	110
JT75(V)	112
JT53L(V)	114
JT33(V)	116
JT53C	118
JT32C	120
JT22C	122
JOE75 (3.3 V)	124



Index

JOE75 (2.5 V)	126
JVE75A (3.3V)	128
JVE75B (3.3V)	130
JOD75 (3.3 V or 2.5 V)	132
JVD75A (3.3V)	134
JVD75B (3.3V)	136
JCO8 (5.0 V)	138
JCO14 (5.0 V)	140
JCO8 (3.3 V)	142
JCO14 (3.3 V)	144
JRO32	146





actual size

Oscillator · VX3 · 5.0 V

SMD Oscillator with Tristate Function · 7.0 x 5.0 mm

- preferred type for extended temperature range
- reflow soldering temperature: 260 °C max.
- full ceramic package



General Data

type	VX3 5.0 V
frequency range	0.50 ~ 107.0 MHz (15pF max.) 0.50 ~ 80.0 MHz (50pF max.)
frequency stability over all*	± 20ppm ~ ± 100ppm (table 1)
current consumption	see table 2
supply voltage V _{DC}	5.0 V ± 10%
temperature	operating: -10 °C ~ +70 °C / -40 °C ~ +85 °C storage: -55 °C ~ +125 °C
output	rise & fall time: see table 3 load max: 15pF / 50pF current max.: 16mA low level max.: 0.1 x V _{DC} high level min.: 0.9 x V _{DC}
output enable time max.	100ns
output disable time max.	100ns
start-up time max.	10ms
standby function	tristate
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS
symmetry at 0.5 x V _{DC}	45% ~ 55% typ. (40% ~ 60% max.)

Table 1: Type

stability	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm					
type VX3	E	X	F	Y	FS	YS	EQ	XQ	EP	XP
output load	15 pF	50 pF	15 pF	50 pF	15 pF	50 pF	15 pF	50 pF	15 pF	50 pF
-10 °C ~ +70 °C	●	○	○	○	○	○	○	○	△	△
-40 °C ~ +85 °C	●	○	○	○	○	○	○	○		

● standard ○ available △ excludes aging

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.


Table 2: Current Consumption max.

Current at 15pF load		Current at 50pF load	
0.5 ~ 29.9 MHz	10 mA	0.5 ~ 19.9 MHz	20 mA
30.0 ~ 34.9 MHz	15 mA	20.0 ~ 49.9 MHz	35 mA
35.0 ~ 65.9 MHz	30 mA	50.0 ~ 80.0 MHz	60 mA
66.0 ~ 79.9 MHz	50 mA		
80.0 ~ 107.0 MHz	60 mA		


Table 3: Rise & Fall Time max.

8.0 ns: 0.5 ~ 1.79 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
6.0 ns: 1.8 ~ 34.99 MHz	
5.0 ns: 35.0 ~ 107.00 MHz	

Dimensions

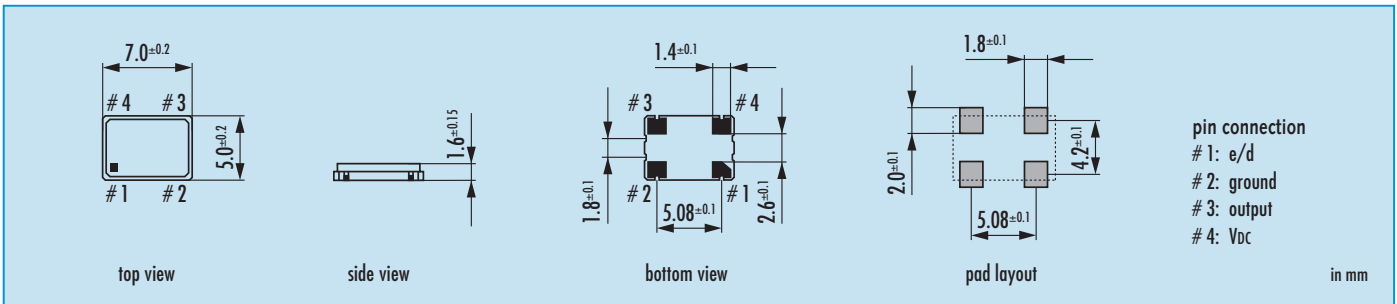

Order Information

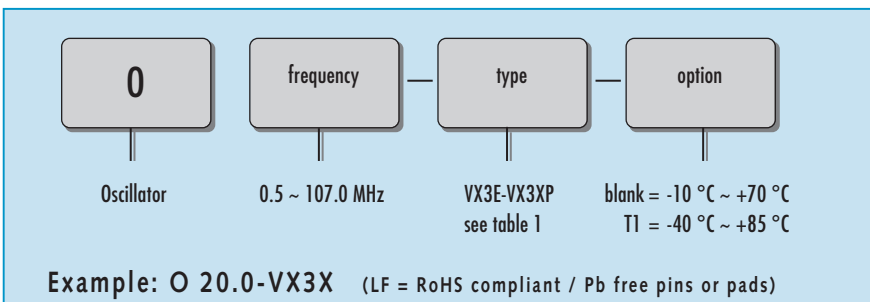


Preferred Type

VX3E-T1: ± 100 ppm / 15 pF / -40 °C ~ +85 °C
VX3E: ± 100 ppm / 15 pF



Oscillator · VX3 · 5.0 V · Tristate Function

Taping Specification (JIS-C0806)

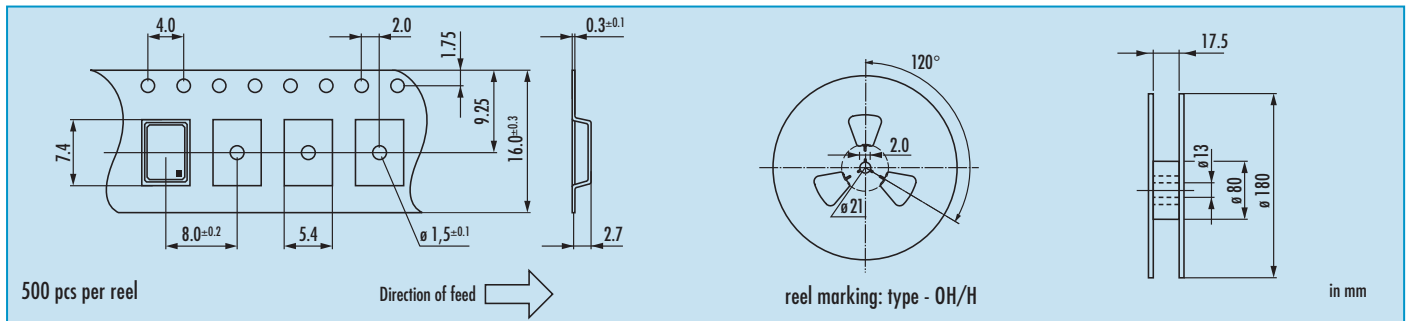

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
disabled conditions:	
<ul style="list-style-type: none"> • oscillator active • output high impedance 	


Marking

type / frequency

date code:
 A ~ M: Jan. - Dec.
 0: 2010
 1: 2011
 2: 2012

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

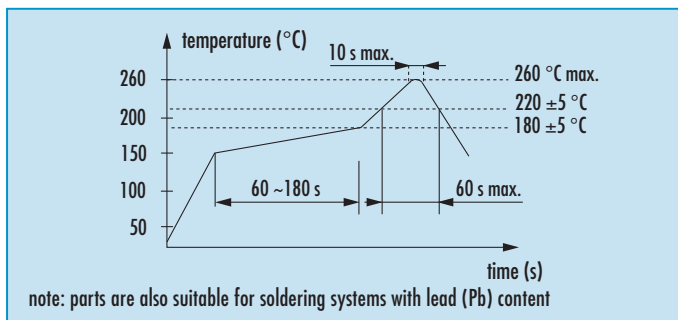

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · VX3 · 3.3 V

SMD Oscillator with Tristate Function · 7.0 x 5.0 mm

- preferred type for extended temperature range
- reflow soldering temperature: 260 °C max.
- full ceramic package



General Data

type	VX3 3.3 V
frequency range	0.50 ~ 70.0 MHz (15pF max.) 0.50 ~ 70.0 MHz (30pF max.)
frequency stability over all*	± 20ppm ± 100ppm (table 1)
current consumption	see table 2
supply voltage V _{DC}	3.3 V ± 10%
temperature	operating: -10 °C ~ +70 °C / -40 °C ~ +85 °C storage: -55 °C ~ +125 °C
output	rise & fall time: see table 3 load max: 15pF / 30pF current max.: 8mA low level max.: 0.1 x V _{DC} high level min.: 0.9 x V _{DC}
output enable time max.	100ns
output disable time max.	100ns
start-up time max.	10ms
standby function	tristate
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS
symmetry at 0.5 x V _{DC}	45% ~ 55% typ. (40% ~ 60% max.)

Table 1: Type

stability	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm					
type VX3	J	M	K	MH	JS	MS	JQ	MQ	JP	MP
output load	15 pF	30 pF	15 pF	30 pF	15 pF	30 pF	15 pF	30 pF	15 pF	30 pF
-10 °C ~ +70 °C	○	○	○	●	○	○	○	○	△	△
-40 °C ~ +85 °C	○	○	○	●	○	○	○	○		

● standard ○ available △ excludes aging

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.


Table 2: Current Consumption max.

Current at 15pF load		Current at 30pF load	
0.5 ~ 33.9 MHz	8 mA	0.5 ~ 33.9 MHz	10 mA
34.0 ~ 49.9 MHz	12 mA	34.0 ~ 49.9 MHz	20 mA
50.0 ~ 70.0 MHz	25 mA	50.0 ~ 70.0 MHz	25 mA


Table 3: Rise & Fall Time max.

8.0 ns: 0.5 ~ 1.79 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
6.0 ns: 1.8 ~ 34.99 MHz	
5.0 ns: 35.0 ~ 70.00 MHz	

Dimensions

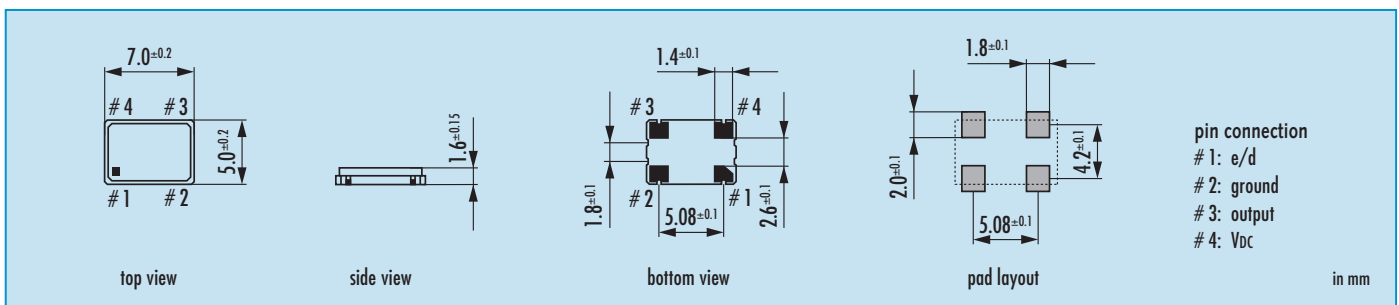

Order Information

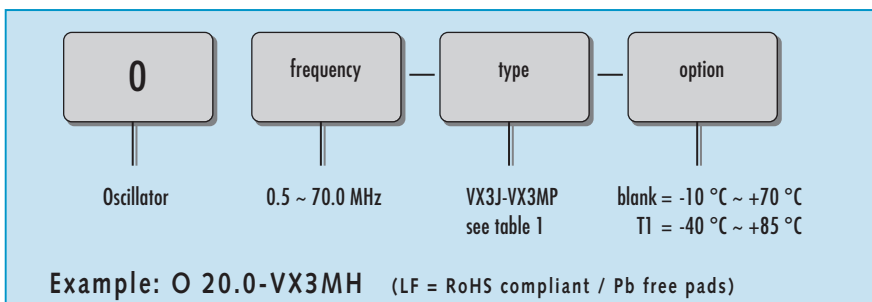


Preferred Type

VX3MH-T1: ± 50 ppm / 30 pF / -40 °C ~ +85 °C
VX3MH: ± 50 ppm / 30 pF



Oscillator · VX3 · 3.3 V · Tristate Function

Taping Specification (JIS-C0806)

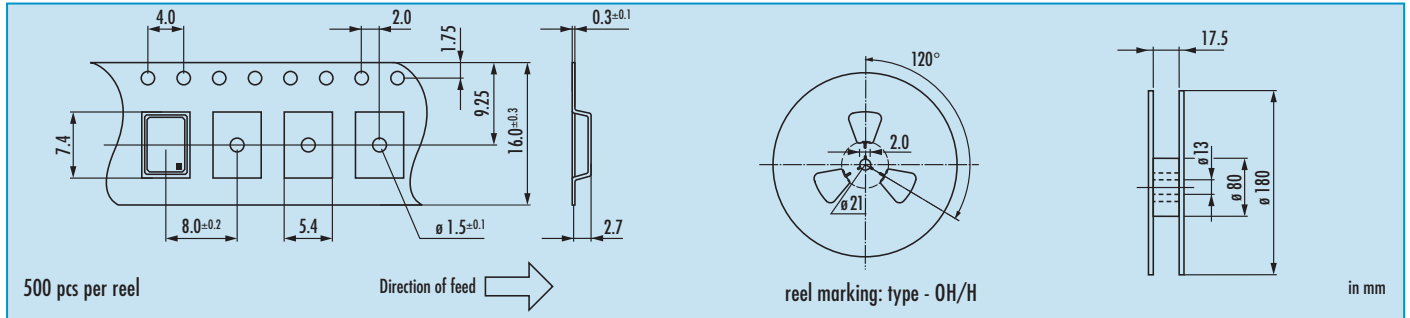

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
disabled conditions:	
<ul style="list-style-type: none"> • oscillator active • output high impedance 	


Marking

type / frequency

date code:
 A ~ M: Jan. - Dec.
 0: 2010
 1: 2011
 2: 2012

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

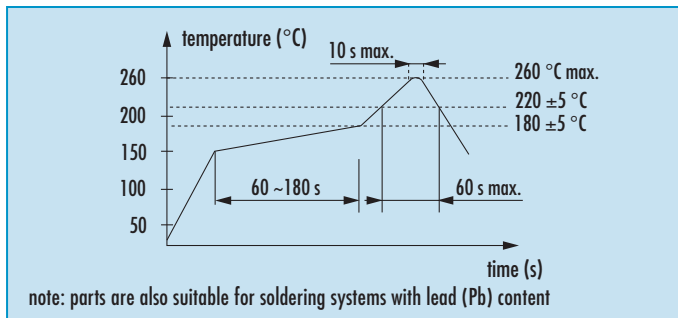

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · VX3 · 3.3 V

SMD Oscillator with Stop Function · 7.0 x 5.0 mm

- preferred type for extended temperature range
- reflow soldering temperature: 260 °C max.
- full ceramic package



General Data

type		VX3 3.3 V
frequency range	VX3W □	0.50 ~ 100.0 MHz (30pF max.)
	VX3L □	100.0 ~ 165.0 MHz (15pF max.)
frequency stability over all*		± 20ppm ~ ± 100ppm (table 1)
current consumption		see table 2
supply voltage V _{DC}		3.3 V +/-10%
temperature	operating	-10 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15pF / 30pF
	current max.	8mA
	low level max.	0.1 x V _{DC}
	high level min.	0.9 x V _{DC}
output enable time max.		10ms
output disable time max.		200ns
start-up time max.		10ms
standby function		stop
standby current max.		10µA
phase jitter 12 kHz ~ 20.0 MHz		< 1.0ps RMS
symmetry at 0.5 x V _{DC}		45% ~ 55% typ. (40% ~ 60% max.)

Table 1: Type

stability	± 100 ppm		± 50 ppm		± 30 ppm		± 25 ppm		± 20 ppm	
type VX3	L	W	LH	WH	LS	WS	LQ	WQ	LP	WP
output load	15 pF	30 pF	15 pF	30 pF	15 pF	30 pF	15 pF	30 pF	15 pF	30 pF
-10 °C ~ +70 °C	○	○	○	○	○	○	○	○	△	△
-40 °C ~ +85 °C	○	○	○	○	○	○	○	○		

● standard ○ available △ excludes aging

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.


Table 2: Current Consumption max.

Current at 15pF load		Current at 30pF load	
0.5 ~ 19.9 MHz	8 mA	0.5 ~ 19.9 MHz	10 mA
20.0 ~ 49.9 MHz	15 mA	20.0 ~ 49.9 MHz	20 mA
50.0 ~ 79.9 MHz	20 mA	50.0 ~ 79.9 MHz	25 mA
80.0 ~ 99.9 MHz	30 mA	80.0 ~ 100.0 MHz	40 mA
100.0 ~ 124.9 MHz	45 mA		
125.0 ~ 165.0 MHz	60 mA		


Table 3: Rise & Fall Time max.

8.0 ns: 0.5 ~ 1.79 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
6.0 ns: 1.8 ~ 79.99 MHz	
5.0 ns: 80.0 ~ 99.99 MHz	
3.0 ns: 100.0 ~ 165.00 MHz	

Dimensions

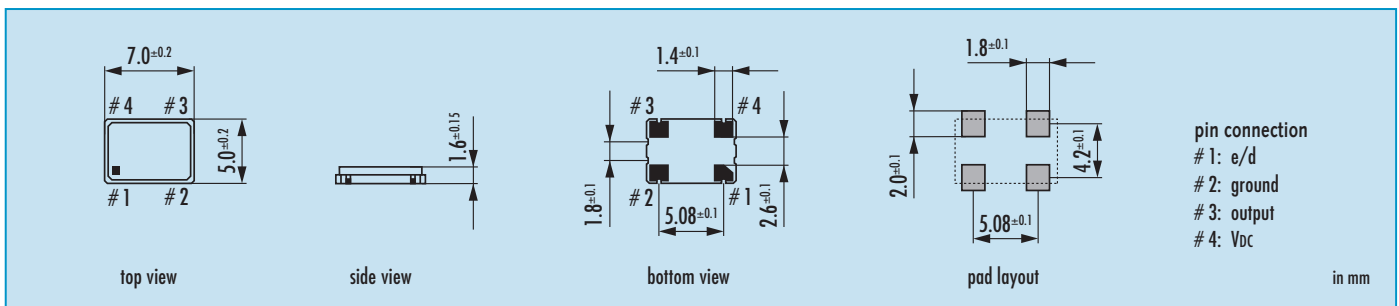

Order Information

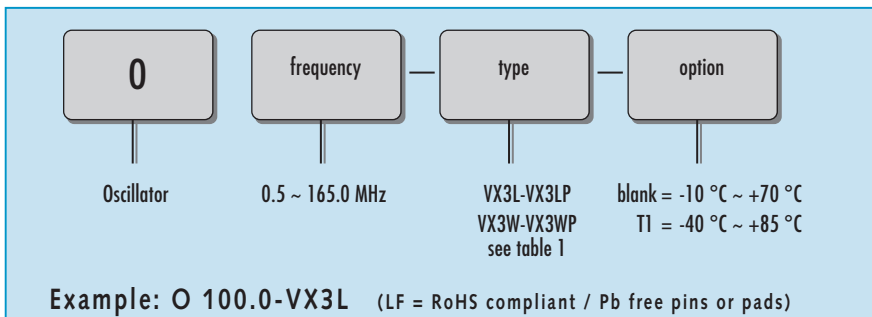


Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk



Oscillator · VX3 · 3.3 V · Stop Function

Taping Specification (JIS-C0806)

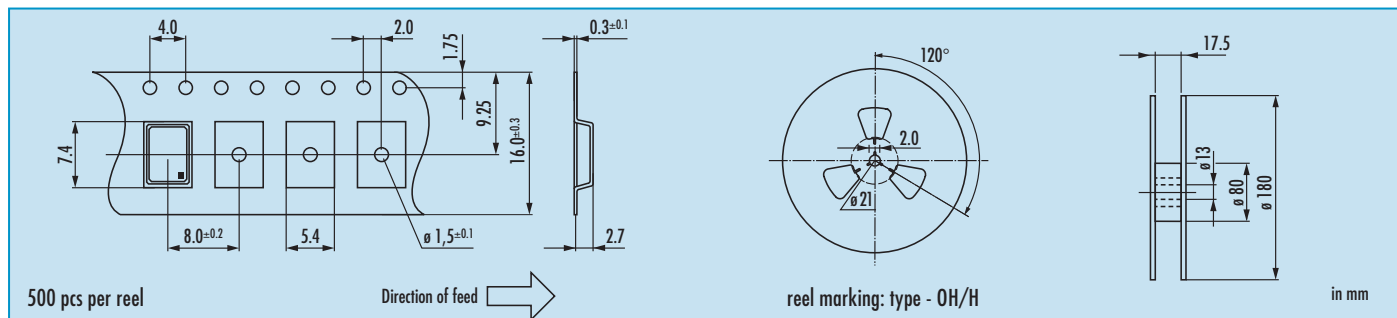

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance


stop function:

- oscillator stops
- output high impedance

Marking

type / frequency	Jan.	Febr.	Mar.	Apr.	May	June
date code:	A	B	C	D	E	F
A ~ M: Jan. - Dec.						
0: 2010						
1: 2011	July	Aug.	Sept.	Oct.	Nov.	Dec.
2: 2012	G	H	J	K	L	M

Reflow Soldering Profile

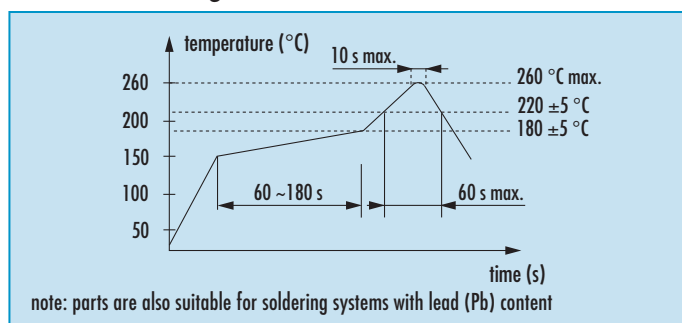



actual size

Oscillator · VX3 · 2.8 V

SMD Oscillator with Stop Function · 7.0 x 5.0 mm

- preferred type for extended temperature range
- reflow soldering temperature: 260 °C max.
- full ceramic package



General Data

type	VX3 2.8V	
frequency range	0.50 ~ 165.0 MHz (15pF max.) 0.50 ~ 100.0 MHz (30pF max.)	
frequency stability over all*	± 20ppm ± ± 100ppm (table 1)	
current consumption	see table 2	
supply voltage V _{DC}	2.8V ± 5%	
temperature	operating	-10 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15pF / 30pF
	current max.	8mA
	low level max.	0.1 x V _{DC}
	high level min.	0.9 x V _{DC}
output enable time max.	10ms	
output disable time max.	200ns	
start-up time max.	10ms	
standby function	stop	
standby current max.	10µA	
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS	
symmetry at 0.5 x V _{DC}	45% ~ 55% typ. (40% ~ 60% max.)	

Table 1: Type

stability	± 100 ppm		± 50 ppm		± 30 ppm		± 25 ppm		± 20 ppm	
type VX3	P	N	PH	NH	PS	NS	PQ	NQ	PP	NP
output load	15 pF	30 pF	15 pF	30 pF	15 pF	30 pF	15 pF	30 pF	15 pF	30 pF
-10 °C ~ +70 °C	○	○	○	○	○	○	○	○	△	△
-40 °C ~ +85 °C	○	○	○	○	○	○	○	○		

● standard ○ available △ excludes aging

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.


Table 2: Current Consumption max.

Current at 15pF load		Current at 30pF load	
0.5 ~ 33.9 MHz	8 mA	0.5 ~ 19.9 MHz	10 mA
34.0 ~ 49.9 MHz	12 mA	20.0 ~ 49.9 MHz	20 mA
50.0 ~ 79.9 MHz	18 mA	50.0 ~ 79.9 MHz	25 mA
80.0 ~ 99.9 MHz	30 mA	80.0 ~ 100.0 MHz	35 mA
100.0 ~ 124.9 MHz	40 mA		
125.0 ~ 165.0 MHz	60 mA		

Table 3: Rise & Fall Time max.

8.0 ns: 0.5 ~ 1.79 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
6.0 ns: 1.8 ~ 79.99 MHz	
5.0 ns: 80.0 ~ 99.99 MHz	
3.0 ns: 100.0 ~ 165.00 MHz	

Dimensions

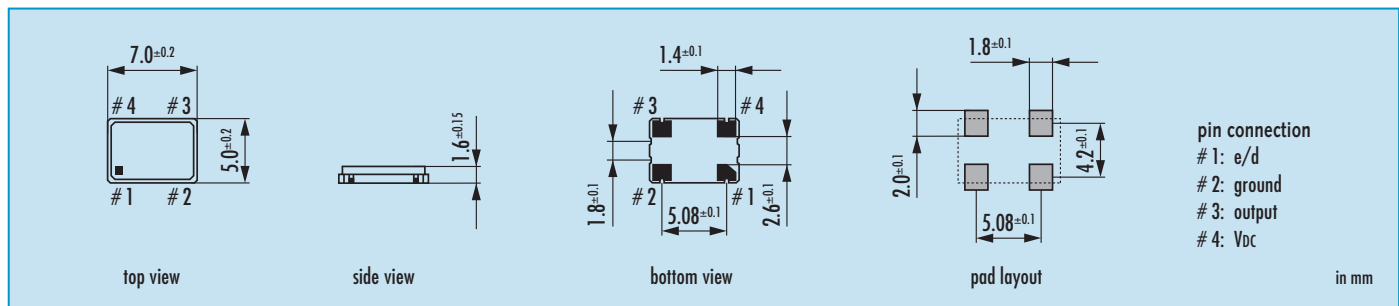

Order Information

0	frequency	type	option
Oscillator	0.5 ~ 165.0 MHz	VX3P-VX3NP see table 1	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: O 20.0-VX3PH (LF = RoHS compliant / Pb free pins or pads)


Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk



Oscillator · VX3 · 2.8 V · Stop Function

Taping Specification (JIS-C0806)

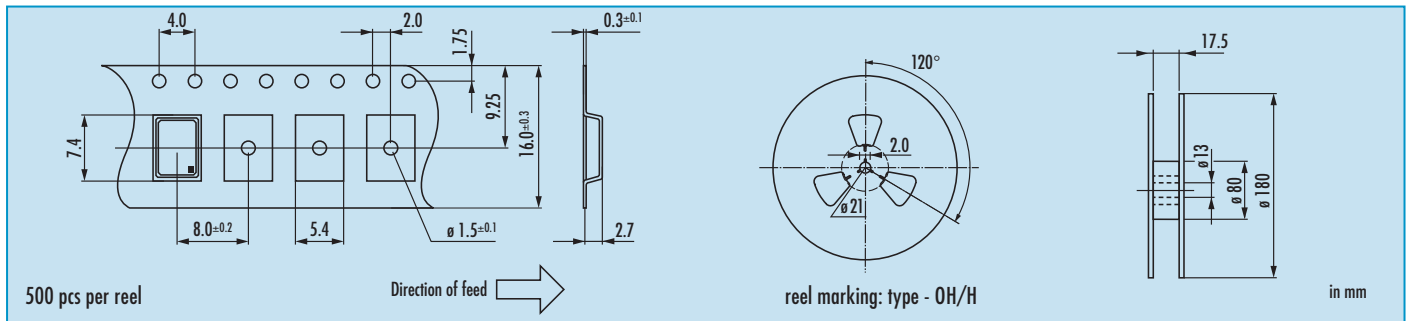

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance

stop function:

- oscillator stops
- output high impedance


Marking

type / frequency

date code:
 A ~ M: Jan. - Dec.
 0: 2010
 1: 2011
 2: 2012

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

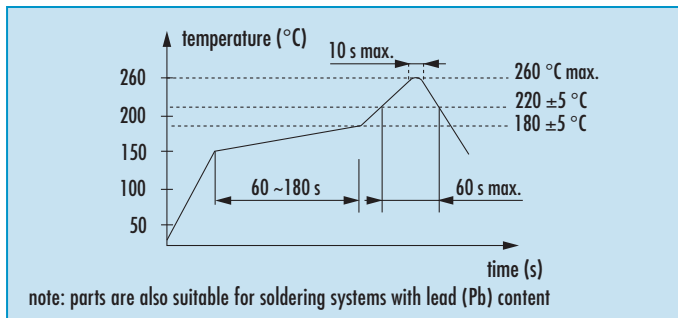



actual size

Oscillator · VX3 · 2.5 V

SMD Oscillator with Stop Function · 7.0 x 5.0 mm

- preferred type for extended temperature range
- reflow soldering temperature: 260 °C max.
- full ceramic package



General Data

type	VX3 2.5 V
frequency range	0.50 ~ 125.0 MHz (15pF max.) 0.50 ~ 80.0 MHz (30pF max.)
frequency stability over all*	± 20ppm ~ ± 100ppm (table 1)
current consumption	see table 2
supply voltage V _{DC}	2.5 V ± -10%
temperature	operating: -10 °C ~ +70 °C / -40 °C ~ +85 °C storage: -55 °C ~ +125 °C
output	rise & fall time: see table 3 load max: 15pF / 30pF current max.: 8mA low level max.: 0.1 x V _{DC} high level min.: 0.9 x V _{DC}
output enable time max.	10ms
output disable time max.	100ns
start-up time max.	10ms
standby function	stop
standby current max.	3µA
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS
symmetry at 0.5 x V _{DC}	45% ~ 55% typ. (40% ~ 60% max.)

Table 1: Type

stability	± 100 ppm		± 50 ppm		± 30 ppm		± 25 ppm		± 20 ppm	
type VX3	U	D	UH	DH	US	DS	UQ	DQ	UP	DP
output load	15 pF	30 pF	15 pF	30 pF	15 pF	30 pF	15 pF	30 pF	15 pF	30 pF
-10 °C ~ +70 °C	○	○	○	○	○	○	○	○	△	△
-40 °C ~ +85 °C	○	○	○	○	○	○	○	○		

● standard ○ available △ excludes aging

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.


Table 2: Current Consumption max.

Current at 15pF load		Current at 30pF load	
0.5 ~ 33.9 MHz	7 mA	0.5 ~ 19.9 MHz	9 mA
34.0 ~ 49.9 MHz	11 mA	20.0 ~ 49.9 MHz	15 mA
50.0 ~ 79.9 MHz	17 mA	50.0 ~ 80.0 MHz	20 mA
80.0 ~ 125.0 MHz	30 mA		

Table 3: Rise & Fall Time max.

8.0 ns: 0.5 ~ 1.79 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
6.0 ns: 1.8 ~ 79.99 MHz	
5.0 ns: 80.0 ~ 99.99 MHz	
3.0 ns: 100.0 ~ 125.00 MHz	

Dimensions

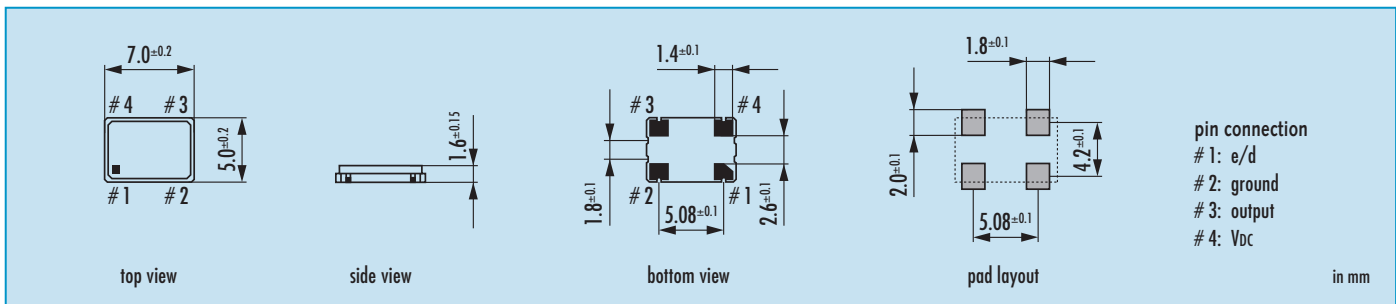

Order Information

0	frequency	type	option
Oscillator	0.5 ~ 125.0 MHz	VX3U-VX3DP see table 1	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: O 20.0-VX3UH (LF = RoHS compliant / Pb free pins or pads)


Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk



Oscillator · VX3 · 2.5 V · Stop Function

Taping Specification (JIS-C0806)

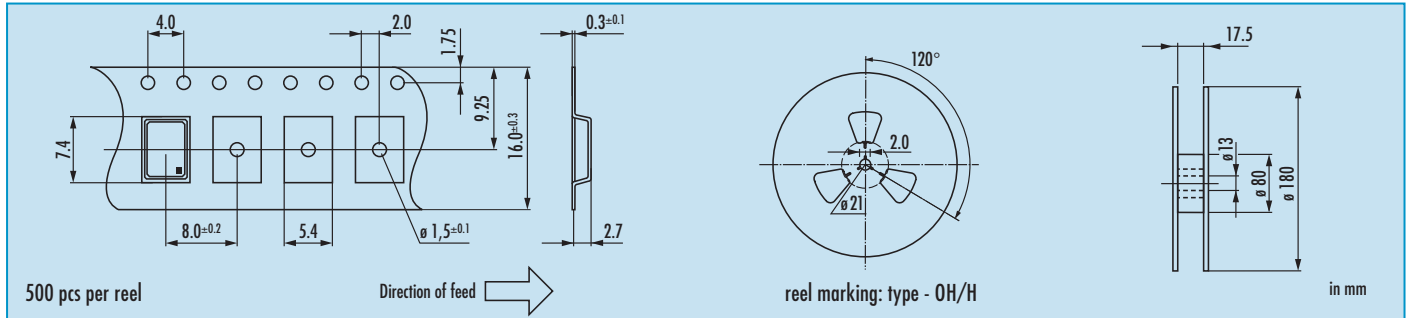

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
stop function: <ul style="list-style-type: none"> oscillator stops output high impedance 	


Marking

type / frequency

date code:
 A ~ M: Jan. - Dec.
 0: 2010
 1: 2011
 2: 2012

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

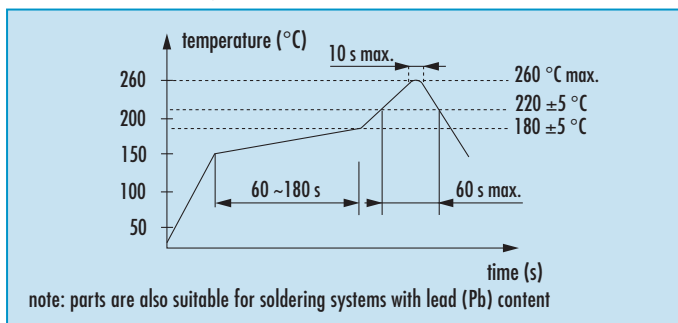



actual size

Oscillator · VX3 · 1.8 V

SMD Oscillator with Stop Function · 7.0 x 5.0 mm

- preferred type for extended temperature range
- reflow soldering temperature: 260 °C max.
- full ceramic package



General Data

type	VX3 1.8 V
frequency range	0.5 ~ 40.0 MHz
higher frequencies on request	40.1 ~ 125.0 MHz
frequency stability over all*	± 20ppm ~ ± 100ppm see table 1
current consumption	see table 2
supply voltage V _{DC}	1.8V ± 10%
temperature	operating: -10 °C ~ +70 °C / -40 °C ~ +85 °C storage: -55 °C ~ +125 °C
output	rise & fall time: see table 3 load max: 30pF current max.: 2.8mA (<40MHz) / 8.0mA (>40MHz) low level max.: 0.1 x V _{DC} high level min.: 0.9 x V _{DC}
output enable time max.	10ms
output disable time max.	200ns
start-up time max.	10ms
standby function	stop
standby current max.	10µA (<40MHz) / 100µA (>40MHz)
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS
symmetry at 0.5 x V _{DC}	45% ~ 55% typ. (40% ~ 60% max.)

Table 1: Type

stability	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm
type VX3	V	VH	VS	VQ	VP
output load	30 pF	30 pF	30 pF	30 pF	30 pF
-10 °C ~ +70 °C	○	○	○	○	△
-40 °C ~ +85 °C	○	○	○	○	
● standard ○ available △ excludes aging					

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.


Table 2: Current Consumption max.

Current at 30pF load	
0.50 ~ 19.9 MHz	7 mA
20.0 ~ 39.9 MHz	10 mA
40.0 ~ 69.9 MHz	18 mA
70.0 ~ 94.9 MHz	25 mA
95.0 ~ 125.0 MHz	30 mA


Table 3: Rise & Fall Time max.

8.0 ns: 0.5 ~ 1.79 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
6.0 ns: 1.8 ~ 69.90 MHz	
5.0 ns: 70.00 ~ 99.90 MHz	
4.0 ns: 100.00 ~ 125.00 MHz	

Dimensions

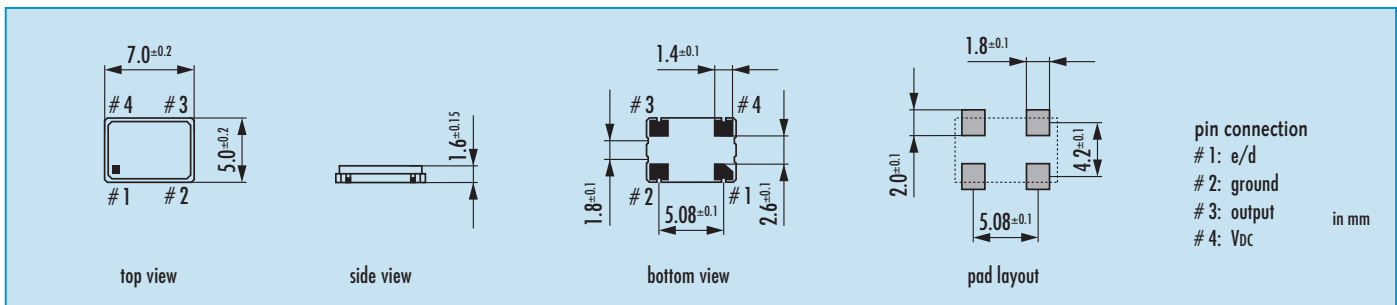

Order Information

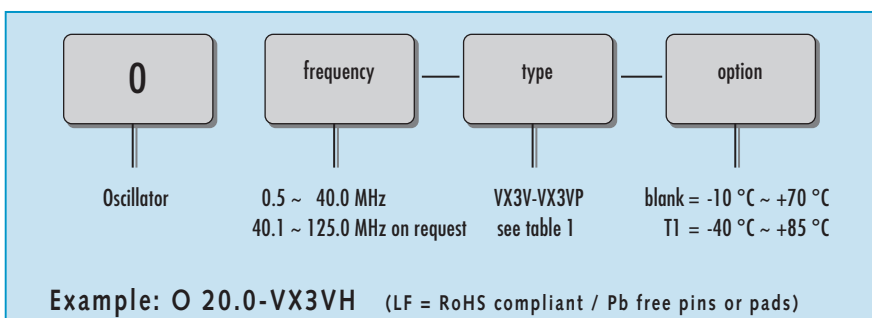


Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk



Oscillator · VX3 · 1.8 V · Stop Function

Taping Specification (JIS-C0806)

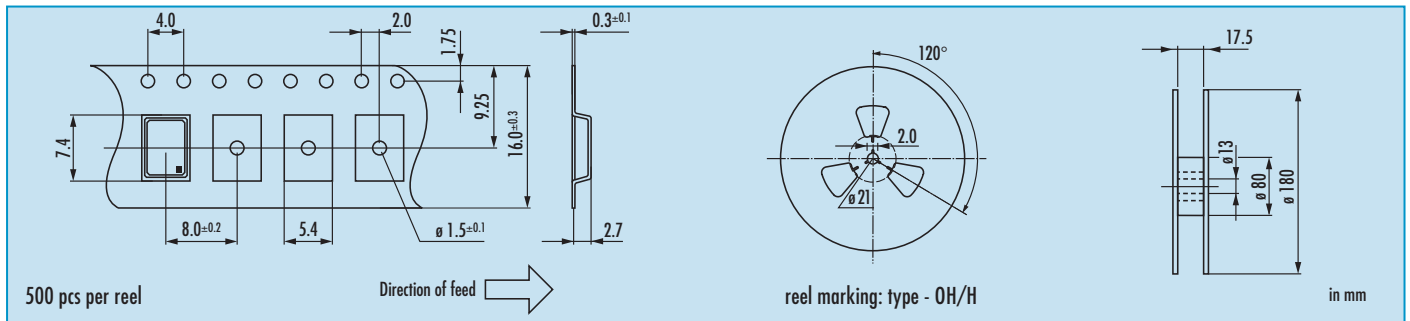

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance

stop function:

- oscillator stops
- output high impedance


Marking

type / frequency

date code:
 A ~ M: Jan. - Dec.
 0: 2010
 1: 2011
 2: 2012

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

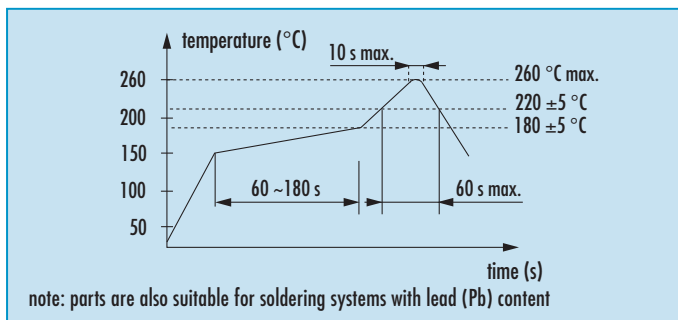



actual size

Oscillator · JO75 · 5.0 V

SMD Oscillator with Tristate Function · 7.5 x 5.0 mm

- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JO75 5.0 V	
frequency range	1.8 ~ 80.0 MHz (15pF/30pF/50pF opt.)	
	80.0 ~ 107.0 MHz (15pF) on request	
frequency stability over all*	± 20ppm ~ ± 100ppm (table 1)	
current consumption	see table 2	
supply voltage V _{DC}	5.0 V ± 10%	
temperature	operating	-10 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15pF / 30pF / 50pF
	current max.	16mA
	low level max.	0.1 x V _{DC}
	high level min.	0.9 x V _{DC}
output enable time max.	100ns	
output disable time max.	100ns	
start-up time max.	10ms	
standby function	tristate	
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS	
symmetry at 0.5 x V _{DC}	45% ~ 55% typ. (40% ~ 60% max.)	

Table 1: Frequency Stability Code

stability code	A	B	G	C	D
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm
-10 °C ~ +70 °C		●	○	○	△
-40 °C ~ +85 °C	○	●	○	△	

● standard ○ available △ excludes shock and vibration

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


Current at 15pF load		Current at 30pF load		Current at 50pF load	
1.8 ~ 19.9 MHz	12 mA	1.8 ~ 19.9 MHz	15 mA	1.8 ~ 19.9 MHz	20 mA
20.0 ~ 39.9 MHz	20 mA	20.0 ~ 39.9 MHz	28 mA	20.0 ~ 39.9 MHz	35 mA
40.0 ~ 59.9 MHz	30 mA	40.0 ~ 59.9 MHz	35 mA	40.0 ~ 59.9 MHz	40 mA
60.0 ~ 79.9 MHz	45 mA	60.0 ~ 80.0 MHz	52 mA	60.0 ~ 80.0 MHz	60 mA
80.0 ~ 107.0 MHz	60 mA				

Table 3: Rise & Fall Time max.

6.0 ns:	1.8 ~ 9.9 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5.0 ns:	10.0 ~ 39.9 MHz	
4.0 ns:	40.0 ~ 69.9 MHz	
3.0 ns:	70.0 ~ 107.0 MHz	

note: Suffix "X" includes 10 years aging, for A, B, G available.

Dimensions

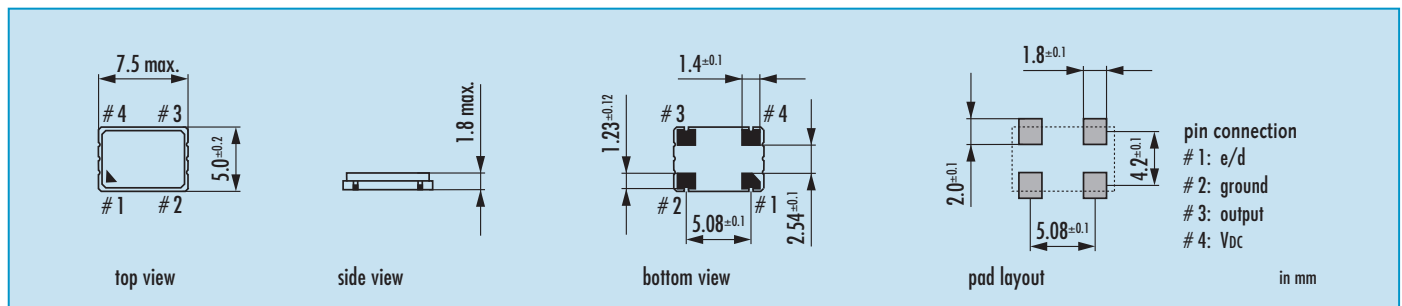

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	1.8 ~ 80.0 MHz 80.0 ~ 107.0 MHz on req.	JO75	see table 1	5.0 = 5.0 V	1 = 15 pF std. > 80 MHz 2 = 30 pF std. < 80 MHz 3 = 50 pF opt. < 80 MHz	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: O 20.0-JO75-B-5.0-1 (LF = RoHS compliant / Pb free pads)



Oscillator · JO75 · 5.0 V · Tristate Function

Taping Specification

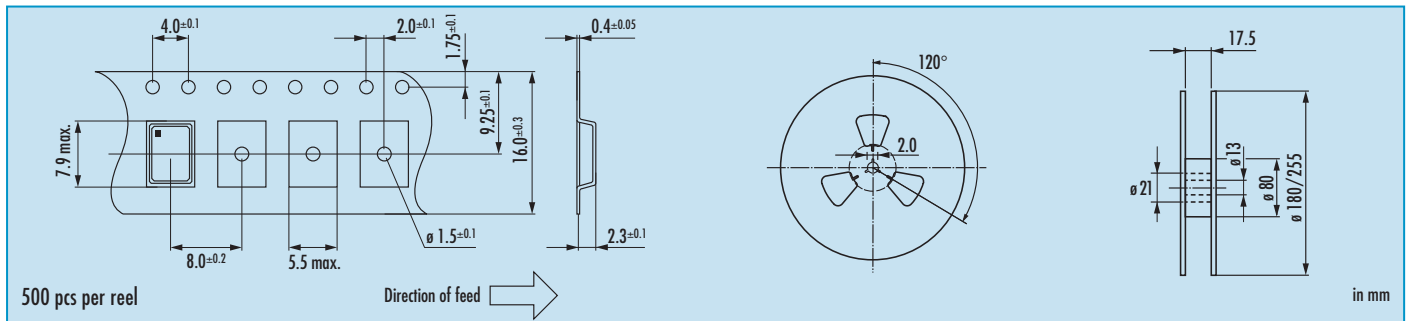

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
disabled conditions:	
<ul style="list-style-type: none"> • oscillator active • output high impedance 	


Marking

frequency type / date code

date code:
 A ~ M: Jan. - Dec.
 9: 2009
 0: 2010
 1: 2011

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

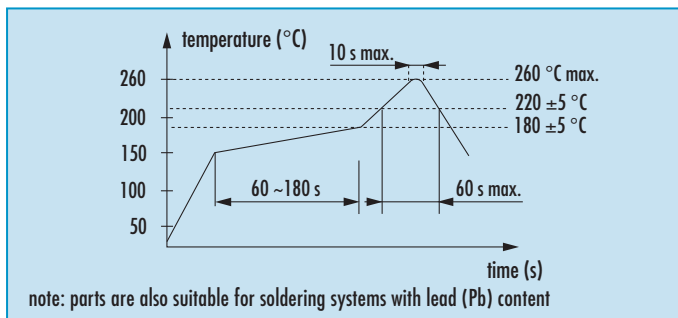

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO75H · 5.0 V

High Stability Oscillator with Stop Function · 7.5 x 5.0 mm

- tight tolerance down to ± 10 ppm
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JO75H 5.0 V high stability
frequency range	1.80 ~ 50.0 MHz
frequency stability over all*	± 10 ppm ~ ± 20 ppm see table 1
current consumption	see table 2
supply voltage V_{DC}	5.0 V \pm 5%
temperature	operating: -10 °C ~ +70 °C / -40 °C ~ +85 °C storage: -55 °C ~ +125 °C
output	rise & fall time: see table 3 load max: 15pF / 30 pF current max.: 4mA low level max.: 0.1 x V_{DC} high level min.: 0.9 x V_{DC}
output enable time max.	5ms
output disable time max.	150ns
start-up time max.	5ms
standby function	stop
standby current max.	50 μ A
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS
symmetry at 0.5 x V_{DC}	45% ~ 55% max.

Table 1: Frequency Stability Code

stability code	D ± 20 ppm	E ± 15 ppm	F ± 10 ppm		
-10 °C ~ +70 °C	○	△	△		
-40 °C ~ +85 °C	○	△			

○ available △ excludes shock and vibration

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.


Table 2: Current Consumption max.

Current at 15pF load		Current at 30pF load	
1.8 ~ 19.9 MHz	10 mA	1.8 ~ 19.9 MHz	18 mA
20.0 ~ 50.0 MHz	22 mA	20.0 ~ 50.0 MHz	35 mA

Table 3: Rise & Fall Time max.

5.0 ns: 1.80 ~ 50.0 MHz	note: - specific data on request - rise time: 0.1 V_{DC} ~ 0.9 V_{DC} - fall time: 0.9 V_{DC} ~ 0.1 V_{DC}
-------------------------	---

Dimensions

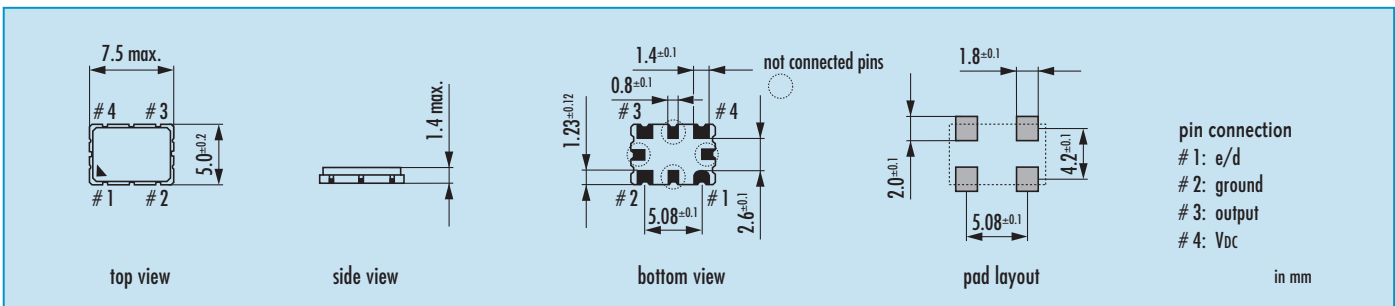

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	1.80 ~ 50.0 MHz	JO75H	see table 1	5.0 = 5.0 V	1 = 15 pF 2 = 30 pF	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: O 20.0-JO75H-D-5.0-1 (LF = RoHS compliant / Pb free pads)



Oscillator · JO75H · 5.0 V · High Stability

Taping Specification

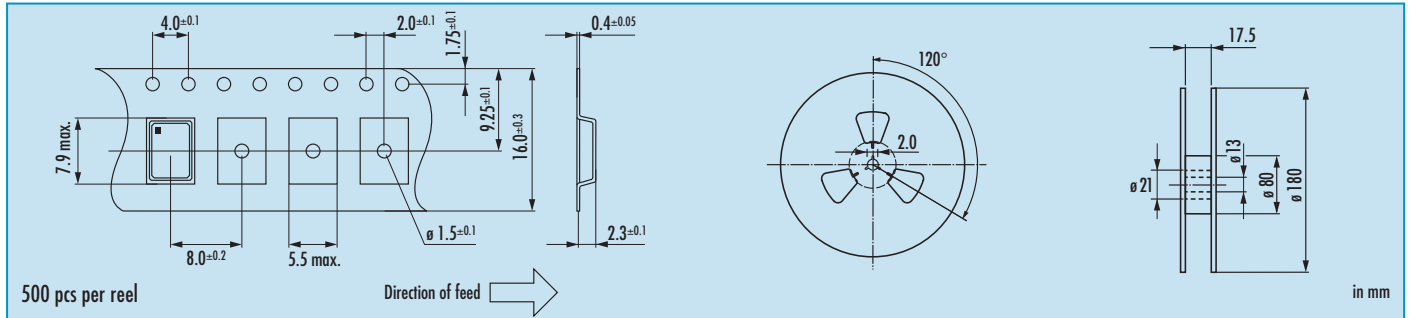

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance

stop function:

- oscillator stops
- output high impedance


Marking

frequency type / date code

date code:
 A ~ M: Jan. - Dec.
 9: 2009
 0: 2010
 1: 2011

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

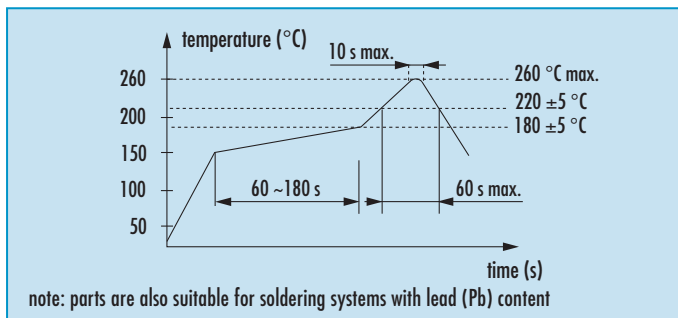

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO75 · 3.3 V

SMD Oscillator with Stop Function · 7.5 x 5.0 mm

- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JO75 3.3 V	
frequency range	1.0 ~ 170.0 MHz (15pF max.)	
	1.0 ~ 80.0 MHz (30pF max)	
frequency stability over all*	± 20ppm ~ ± 100ppm (table 1)	
current consumption	see table 2	
supply voltage V _{DC}	3.3 V ± 10%	
temperature	operating	-10 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15pF / 30pF
	current max.	8mA
	low level max.	0.1 x V _{DC}
	high level min.	0.9 x V _{DC}
output enable time max.	10ms	
output disable time max.	200ns	
start-up time max.	10ms	
standby function	stop	
standby current max.	10µA	
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS	
symmetry at 0.5 x V _{DC}	45% ~ 55% typ. (40% ~ 60% max.)	

Table 1: Frequency Stability Code

stability code	A	B	G	C	D
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm
-10 °C ~ +70 °C		●	○	○	△
-40 °C ~ +85 °C	○	●	○	△	

● standard ○ available △ excludes shock and vibration

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.

Current at 15pF load		Current at 30pF load	
1.0 ~ 19.9 MHz	8 mA	1.0 ~ 19.9 MHz	15 mA
20.0 ~ 49.9 MHz	15 mA	20.0 ~ 49.9 MHz	25 mA
50.0 ~ 79.9 MHz	25 mA	50.0 ~ 80.0 MHz	35 mA
80.0 ~ 99.9 MHz	35 mA		
100.0 ~ 124.9 MHz	45 mA		
125.0 ~ 170.0 MHz	60 mA		

Table 3: Rise & Fall Time max.

6.0 ns:	1.0 ~ 9.9 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5.0 ns:	10.0 ~ 39.9 MHz	
4.0 ns:	40.0 ~ 69.9 MHz	
3.0 ns:	70.0 ~ 170.0 MHz	

note: Suffix "X" includes 10 years aging, for A, B, G available.

Dimensions

pin connection
 # 1: e/d
 # 2: ground
 # 3: output
 # 4: V_{CC}

in mm

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	1.0 ~ 170.0 MHz	JO75	see table 1	3.3 = 3.3 V	1 = 15 pF 2 = 30 pF	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: O 20.0-JO75-B-3.3-1 (LF = RoHS compliant / Pb free pads)



Oscillator · JO75 · 3.3 V · Stop Function

Taping Specification

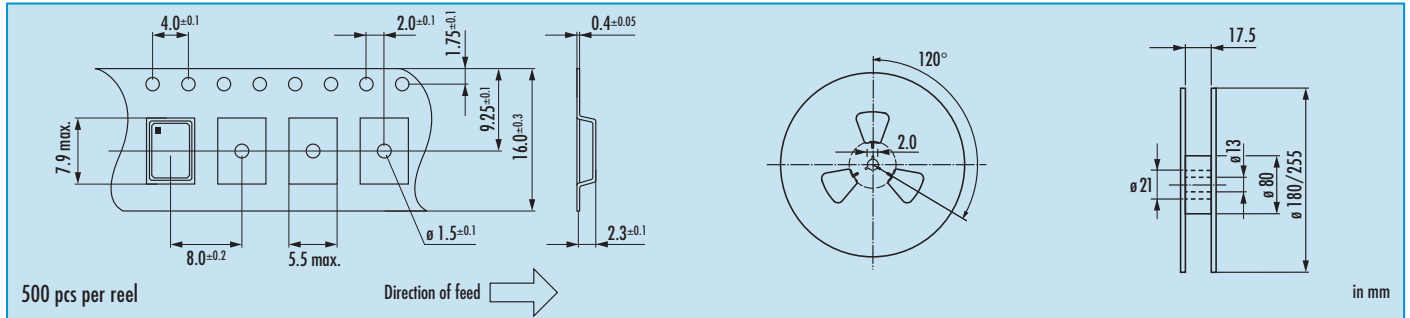

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance

stop function:

- oscillator stops
- output high impedance

Marking


frequency type / date code

date code:
 A ~ M: Jan. - Dec.
 9: 2009
 0: 2010
 1: 2011

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F

July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

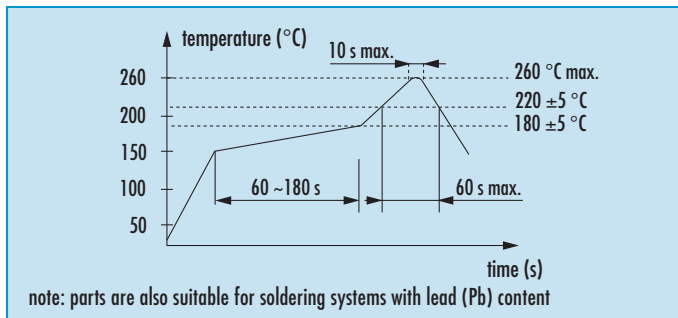

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO75H · 3.3 V

High Stability Oscillator with Stop Function · 7.5 x 5.0 mm

- tight tolerance down to ± 10 ppm
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JO75H 3.3 V high stability
frequency range	1.80 ~ 50.0 MHz
frequency stability over all*	± 10 ppm ~ ± 20 ppm see table 1
current consumption	see table 2
supply voltage V_{DC}	3.3 V \pm 5%
temperature	operating: -10 °C ~ +70 °C / -40 °C ~ +85 °C storage: -55 °C ~ +125 °C
output	rise & fall time: see table 3 load max: 15pF / 30pF current max.: 4mA low level max.: $0.1 \times V_{DC}$ high level min.: $0.9 \times V_{DC}$
output enable time max.	5ms
output disable time max.	150ns
start-up time max.	5ms
standby function	stop
standby current max.	50 μ A
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS
symmetry at $0.5 \times V_{DC}$	45% ~ 55% max.

Table 1: Frequency Stability Code

stability code	D ± 20 ppm	E ± 15 ppm	F ± 10 ppm			
-10 °C ~ +70 °C	○	△	△			
-40 °C ~ +85 °C	○	△				

○ available △ excludes shock and vibration

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.


Table 2: Current Consumption max.

Current at 15pF load		Current at 30pF load	
1.8 ~ 19.9 MHz	10 mA	1.8 ~ 19.9 MHz	15 mA
20.0 ~ 50.0 MHz	22 mA	20.0 ~ 50.0 MHz	25 mA

Table 3: Rise & Fall Time max.

5.0 ns: 1.80 ~ 50.0 MHz	note: - specific data on request - rise time: $0.1 V_{DC} \sim 0.9 V_{DC}$ - fall time: $0.9 V_{DC} \sim 0.1 V_{DC}$
-------------------------	--

Dimensions

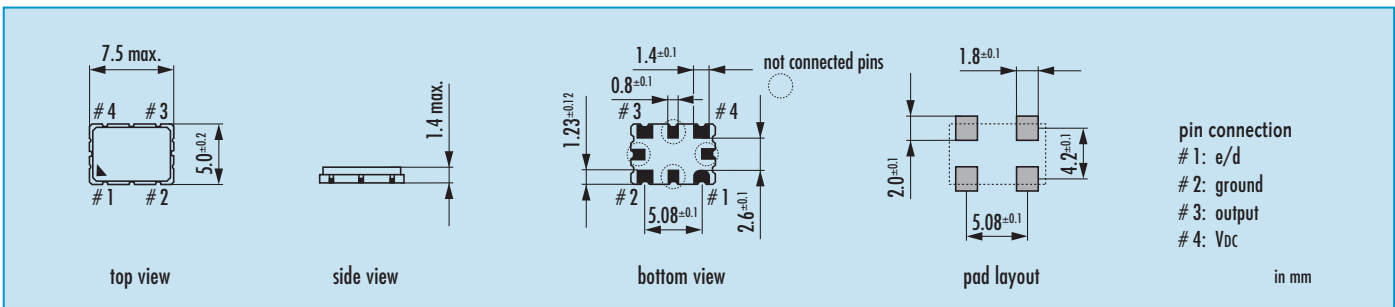

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	1.80 ~ 50.0 MHz	JO75H	see table 1	3.3 = 3.3 V	1 = 15 pF 2 = 30 pF	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: O 20.0-JO75H-D-3.3-1 (LF = RoHS compliant / Pb free pads)



Oscillator · JO75H · 3.3 V · High Stability

Taping Specification

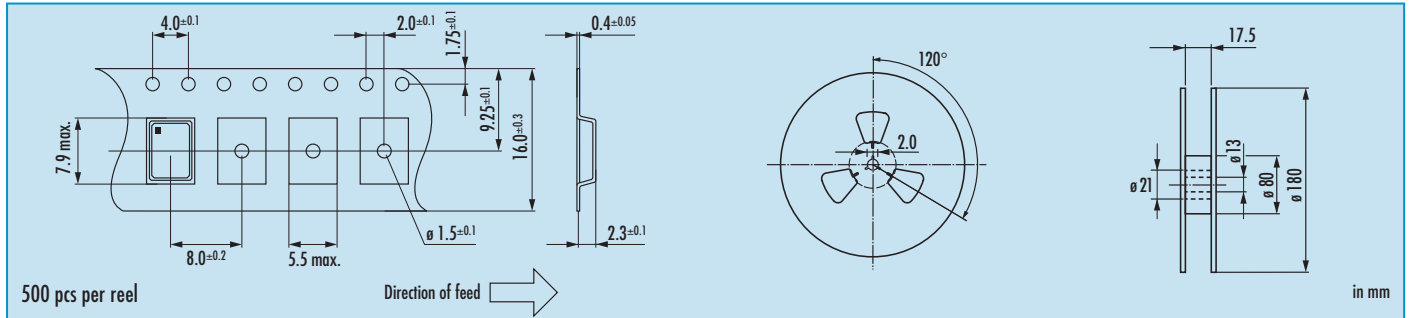

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance

stop function:

- oscillator stops
- output high impedance


Marking

frequency type / date code

date code:
 A ~ M: Jan. - Dec.
 9: 2009
 0: 2010
 1: 2011

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

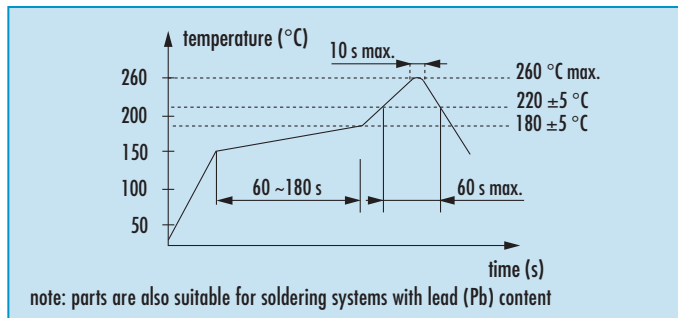

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO75 · 3.3 V

Low Frequency Oscillator with Stop Function · 7.5 x 5.0 mm

- high stability type for RTC application
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JO75 3.3 V
frequency range	12.0 kHz ~ 1.0 MHz (30pF max.)
frequency stability over all*	± 20ppm ~ ± 100ppm see table 1
current consumption	see table 2
supply voltage V _{DC}	3.3 V ± 10%
temperature	operating: -10 °C ~ +70 °C / -40 °C ~ +85 °C storage: -55 °C ~ +125 °C
output	rise & fall time: see table 3 load max: 15pF / 30pF current max.: 2mA low level max.: 0.1 x V _{DC} high level min.: 0.9 x V _{DC}
output enable time max.	5ms
output disable time max.	150ns
start-up time max.	5ms
standby function	stop
standby current max.	10µA
symmetry at 0.5 x V _{DC}	45% ~ 55% max.

Table 1: Frequency Stability Code

stability code	A	B	G	C	D
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm
-10 °C ~ +70 °C	○	○	○	○	△
-40 °C ~ +85 °C	○	○	○	△	

● standard ○ available △ excludes shock and vibration

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.

Current at 15pF load	Current at 30pF load
12.0 kHz ~ 1.0 MHz 10 mA	12.0 kHz ~ 1.0 MHz 16 mA


Table 3: Rise & Fall Time max.

6.0 ns: 12.0 kHz ~ 1.0 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
----------------------------	---


Standard Frequency

32.768 KHz

Dimensions

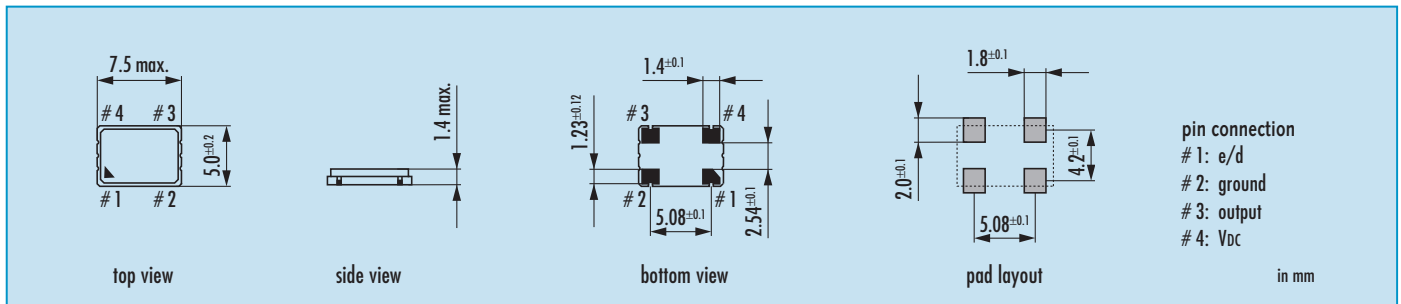


Order Information

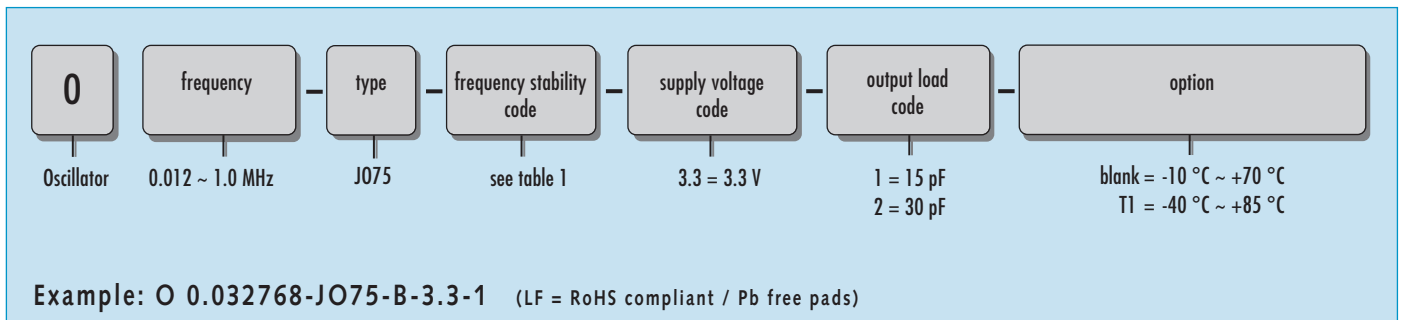

Oscillator · JO75 · 3.3 V · Low Frequency

Taping Specification

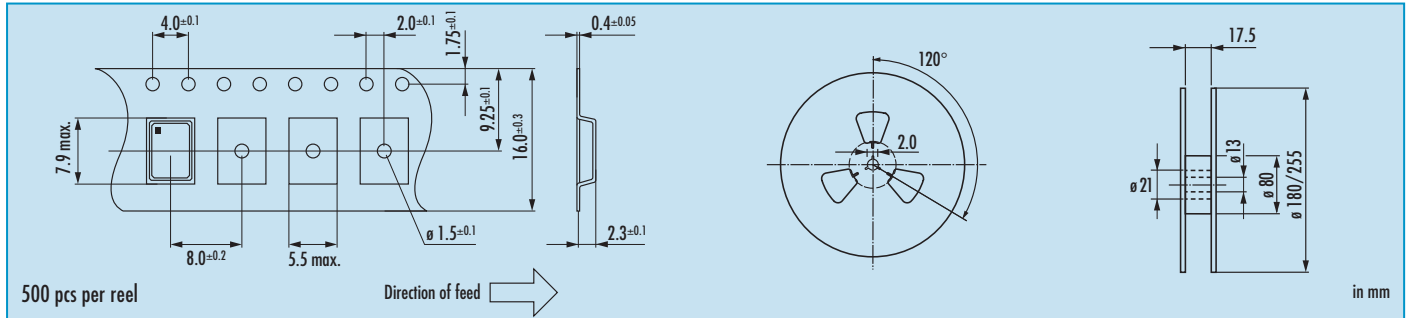

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
stop function:	
<ul style="list-style-type: none"> oscillator stops output high impedance 	


Marking

frequency type / date code

date code:
 A ~ M: Jan. - Dec.
 9: 2009
 0: 2010
 1: 2011

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

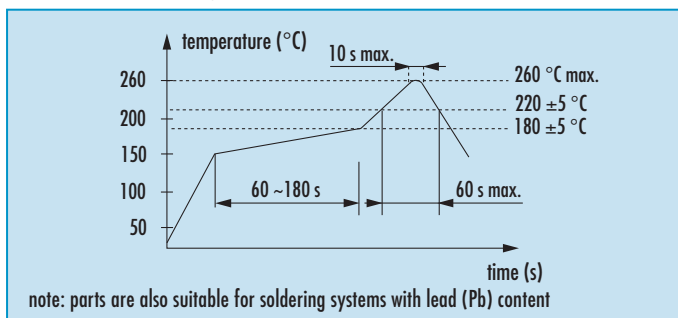

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO75 · 2.8 V

SMD Oscillator with Stop Function · 7.5 x 5.0 mm

- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JO75 2.8V	
frequency range	0.50 ~ 165.0 MHz (15pF max.)	
	0.50 ~ 50.0 MHz (30pF max.)	
frequency stability over all*	± 20ppm ~ ± 100ppm (table 1)	
current consumption	see table 2	
supply voltage V _{DC}	2.8V ± 5%	
temperature	operating	-10 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15pF / 30pF
	current max.	4mA / 8mA
	low level max.	0.1 x V _{DC}
	high level min.	0.9 x V _{DC}
output enable time max.	10ms	
output disable time max.	150ns	
start-up time max.	10ms	
standby function	stop	
standby current max.	10µA	
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS	
symmetry at 0.5 x V _{DC}	45% ~ 55% typ. (40% ~ 60% max.)	

Table 1: Frequency Stability Code

stability code	A	B	G	C
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm
-10 °C ~ +70 °C		○	○	○
-40 °C ~ +85 °C	○	○	○	△

● standard ○ available △ excludes shock and vibration

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.


Table 2: Current Consumption max.

Current at 15pF load		Current at 30pF load	
0.5 ~ 19.9 MHz	7 mA	0.5 ~ 19.9 MHz	12 mA
20.0 ~ 49.9 MHz	12 mA	20.0 ~ 50.0 MHz	25 mA
50.0 ~ 79.9 MHz	20 mA		
80.0 ~ 124.9 MHz	30 mA		
125.0 ~ 165.0 MHz	50 mA		

Table 3: Rise & Fall Time max.

8 ns:	0.5 ~ 1.79 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
6 ns:	1.8 ~ 49.99 MHz	
5 ns:	50.0 ~ 79.99 MHz	
4 ns:	80.0 ~ 124.99 MHz	
3 ns:	125.0 ~ 165.00 MHz	

Dimensions

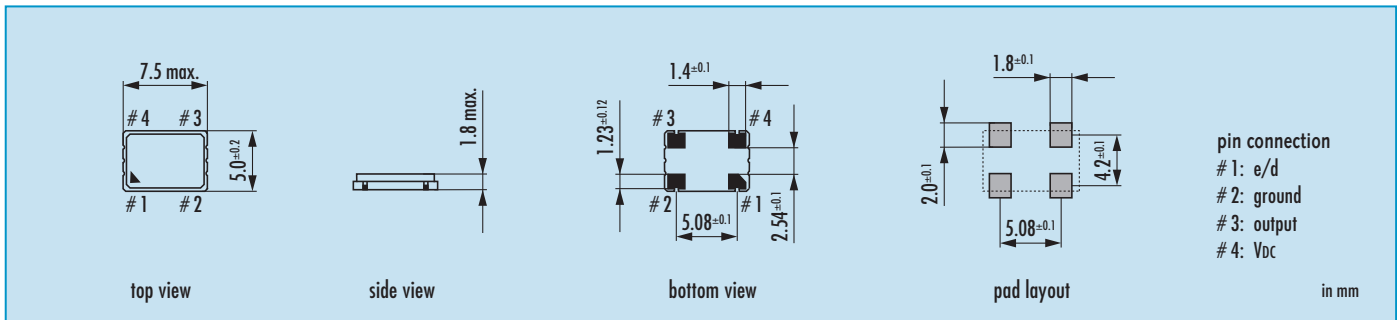

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	0.50 ~ 165.0 MHz	JO75	see table 1	2.8 = 2.8 V	1 = 15 pF 2 = 30 pF	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: O 20.0-JO75-B-2.8-1 (LF = RoHS compliant / Pb free pads)



Oscillator · JO75 · 2.8 V · Stop Function

Taping Specification

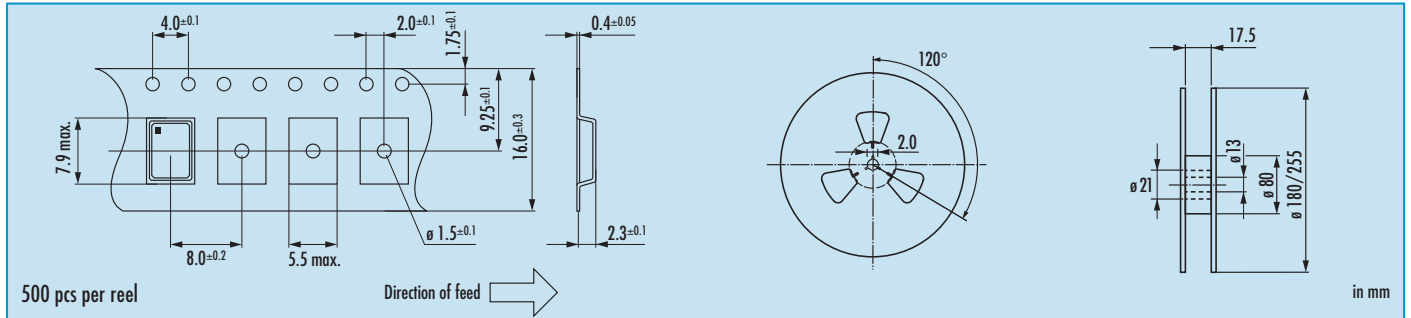

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	use external pull-up resistor
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance

stop function:

- oscillator stops
- output high impedance

Marking

frequency type / date code

date code:

A ~ M: Jan. - Dec.


9: 2009

0: 2010

1: 2011

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

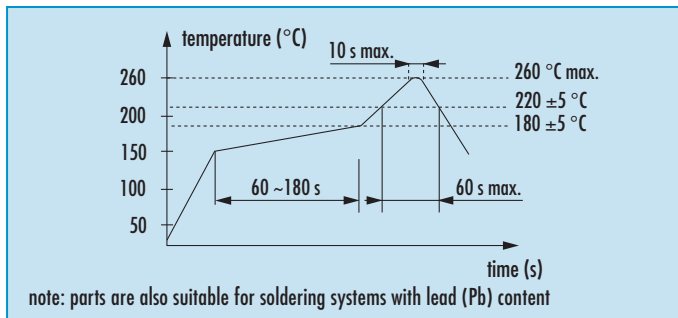

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO75 · 2.5 V

SMD Oscillator with Stop Function · 7.5 x 5.0 mm

- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JO75 2.5 V
frequency range	0.50 ~ 160.0 MHz (15pF max.)
	0.50 ~ 50.00 MHz (30pF max.)
frequency stability over all*	± 20ppm ~ ± 50ppm (table 1)
current consumption	see table 2
supply voltage V _{DC}	2.5 V ± 5%
temperature	operating -10 °C ~ +70 °C / -40 °C ~ +85 °C
	storage -55 °C ~ +125 °C
output	rise & fall time see table 3
	load max. 15pF / 30pF
	current max. 4mA / 8mA
	low level max. 0.1 x V _{DC}
	high level min. 0.9 x V _{DC}
output enable time max.	10ms
output disable time max.	150ns
start-up time max.	10ms
standby function	stop
standby current max.	10µA
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS
symmetry at 0.5 x V _{DC}	45% ~ 55% typ. (40% ~ 60% max.)

Table 1: Frequency Stability Code

stability code	A	B	G	C
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm
-10 °C ~ +70 °C		○	○	○
-40 °C ~ +85 °C	○	○	○	△

● standard ○ available △ excludes shock and vibration

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.

Current at 15pF load		Current at 30pF load	
0.5 ~ 19.9 MHz	6 mA	0.5 ~ 19.9 MHz	10 mA
20.0 ~ 49.9 MHz	11 mA	20.0 ~ 50.0 MHz	20 mA
50.0 ~ 79.9 MHz	17 mA		
80.0 ~ 124.9 MHz	28 mA		
125.0 ~ 160.0 MHz	38 mA		

Table 3: Rise & Fall Time max.

8 ns: 0.5 ~ 1.79 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
6 ns: 1.8 ~ 49.99 MHz	
5 ns: 50.0 ~ 79.99 MHz	
4 ns: 80.0 ~ 124.99 MHz	
3 ns: 125.0 ~ 160.00 MHz	

Dimensions

top view side view bottom view pad layout

pin connection
 # 1: e/d
 # 2: ground
 # 3: output
 # 4: V_{DC}

in mm

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	0.5 ~ 160.0 MHz	JO75	see table 1	2.5 = 2.5 V	1 = 15 pF 2 = 30 pF	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: O 20.0-JO75-B-2.5-1 (LF = RoHS compliant / Pb free pads)



Oscillator · JO75 · 2.5 V · Stop Function

Taping Specification

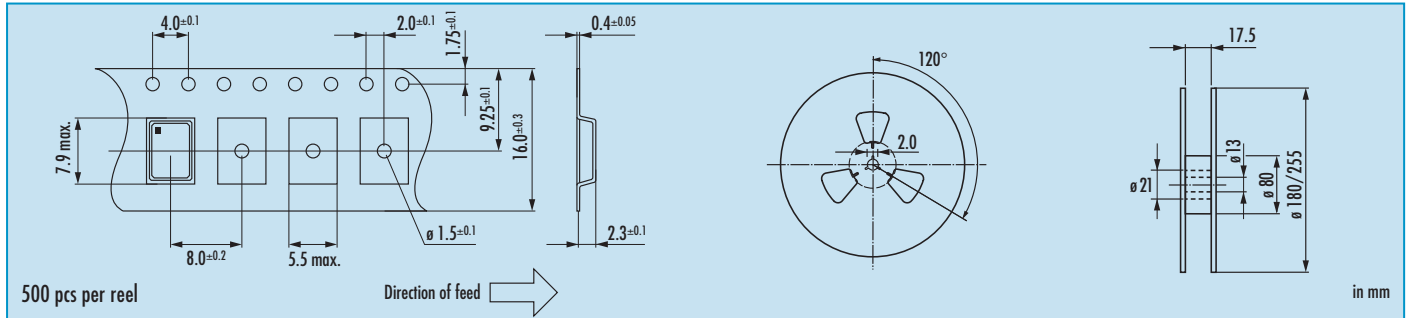

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	use external pull-up resistor
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
stop function: <ul style="list-style-type: none"> oscillator stops output high impedance 	

Marking

frequency type / date code

date code:

A ~ M: Jan. - Dec.


9: 2009

0: 2010

1: 2011

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

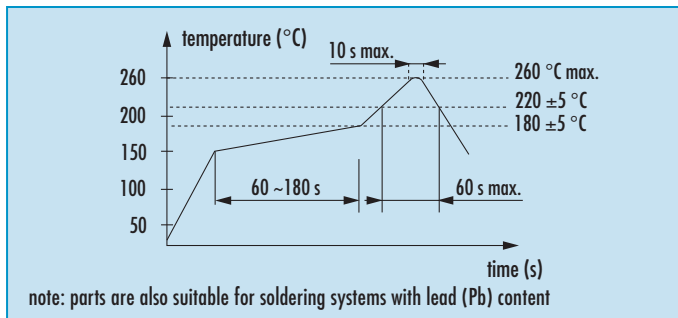

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO75 · 1.8 V

SMD Oscillator with Stop Function · 7.5 x 5.0 mm

- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JO75 1.8V	
frequency range	0.50 ~ 160.0 MHz (15pF max.)	
	0.50 ~ 50.0 MHz (30pF max.)	
frequency stability over all*	± 20ppm ~ ± 100ppm (table 1)	
current consumption	see table 2	
supply voltage V _{DC}	1.8V ± 5%	
temperature	operating	-10 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15pF / 30pF
	current max.	2mA / 2.8mA
	low level max.	0.2 x V _{DC}
	high level min.	0.8 x V _{DC}
output enable time max.	10ms	
output disable time max.	250ns	
start-up time max.	10ms	
standby function	stop	
standby current max.	10µA	
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS	
symmetry at 0.5 x V _{DC}	45% ~ 55% typ. (40% ~ 60% max.)	

Table 1: Frequency Stability Code

stability code	A	B	G	C
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm
-10 °C ~ +70 °C		●	○	○
-40 °C ~ +85 °C	●	○	○	△

● standard ○ available △ excludes shock and vibration

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.


Table 2: Current Consumption max.

Current at 15pF load		Current at 30pF load	
0.5 ~ 19.9 MHz	5 mA	0.5 ~ 19.9 MHz	8 mA
20.0 ~ 49.9 MHz	8 mA	20.0 ~ 50.0 MHz	18 mA
50.0 ~ 79.9 MHz	15 mA		
80.0 ~ 124.9 MHz	25 mA		
125.0 ~ 160.0 MHz	35 mA		

Table 3: Rise & Fall Time max.

8 ns:	0.5 ~ 1.79 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
7 ns:	1.8 ~ 49.99 MHz	
5 ns:	50.0 ~ 79.99 MHz	
4 ns:	80.0 ~ 124.99 MHz	
3 ns:	125.0 ~ 160.00 MHz	

Dimensions

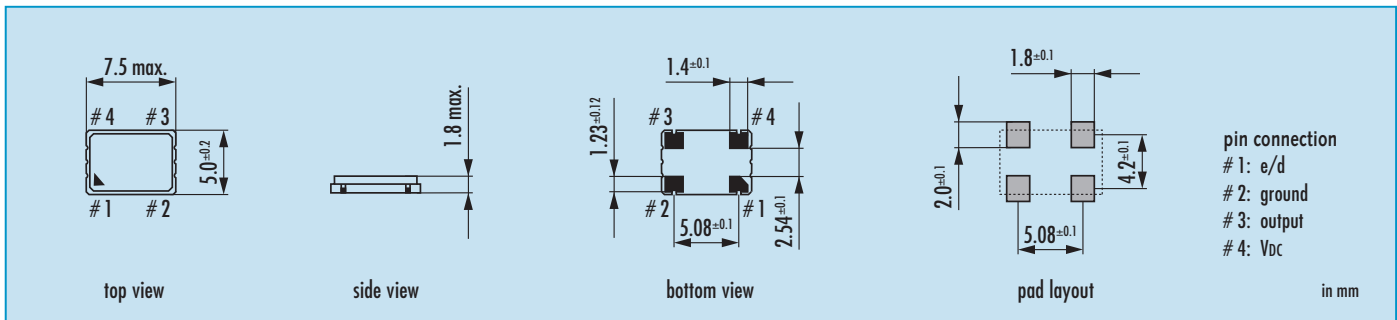

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	0.5 ~ 160.0 MHz	JO75	see table 1	1.8 = 1.8 V	1 = 15 pF 2 = 30 pF	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: O 20.0-JO75-B-1.8-1 (LF = RoHS compliant / Pb free pins or pads)



Oscillator · JO75 · 1.8 V · Stop Function

Taping Specification

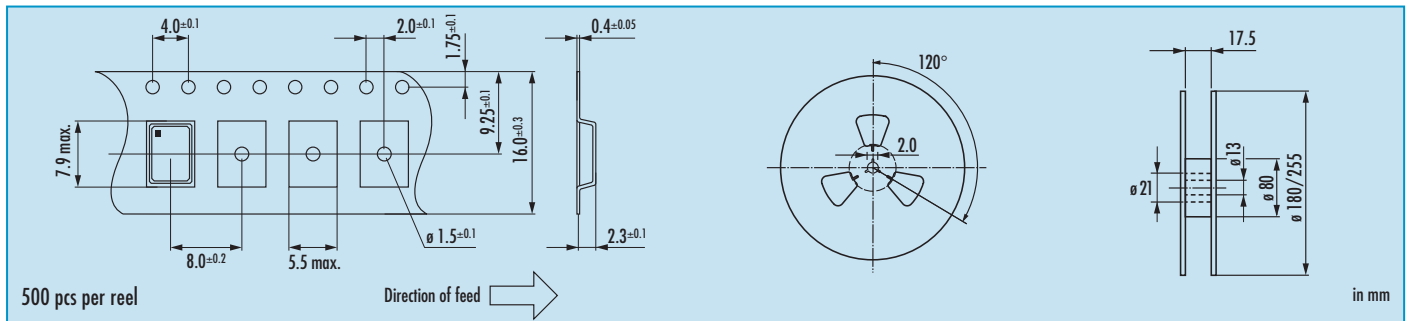

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance

stop function:

- oscillator stops
- output high impedance


Marking

frequency type / date code

date code:
 A ~ M: Jan. - Dec.
 9: 2009
 0: 2010
 1: 2011

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

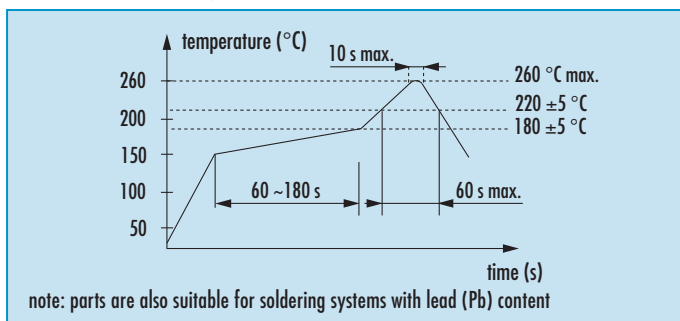

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO53 · 5.0 V

SMD Oscillator with Stop Function · 5.0 x 3.2 mm

- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JO53 5.0 V	
frequency range	0.50 ~ 110.0 MHz (15 pF max.)	
	0.50 ~ 50.00 MHz (30 pF max.)	
frequency stability over all*	± 20 ppm ~ ± 100 ppm (table 1)	
current consumption	see table 2	
supply voltage V _{DC}	5.0 V ± 5%	
temperature	operating	-10 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15 pF / 30 pF
	current max.	8 mA
	low level max.	0.1 x V _{DC}
	high level min.	0.9 x V _{DC}
output enable time max.	10 ms	
output disable time max.	100 ns	
start-up time max.	10 ms	
standby function	stop	
standby current max.	10 µA	
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS	
symmetry at 0.5 x V _{DC}	45% ~ 55% typ. (40% ~ 60% max.)	

Table 1: Frequency Stability Code

stability code	A	B	G	C	D
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm
-10 °C ~ +70 °C		●	○	○	△
-40 °C ~ +85 °C	●	●	○	○	

● standard ○ available △ excludes aging

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.


Table 2: Current Consumption max.

Current at 15pF load		Current at 30pF load	
0.5 ~ 14.9 MHz	10 mA	0.5 ~ 14.9 MHz	15 mA
15.0 ~ 29.9 MHz	15 mA	15.0 ~ 29.9 MHz	20 mA
30.0 ~ 39.9 MHz	25 mA	30.0 ~ 50.0 MHz	40 mA
40.0 ~ 49.9 MHz	35 mA		
50.0 ~ 59.9 MHz	40 mA		
60.0 ~ 79.9 MHz	45 mA		
80.0 ~ 110.0 MHz	50 mA		

Table 3: Rise & Fall Time max.

6 ns: 0.5 ~ 1.79 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5 ns: 1.80 ~ 49.99 MHz	
4 ns: 50.0 ~ 110.00 MHz	

Dimensions

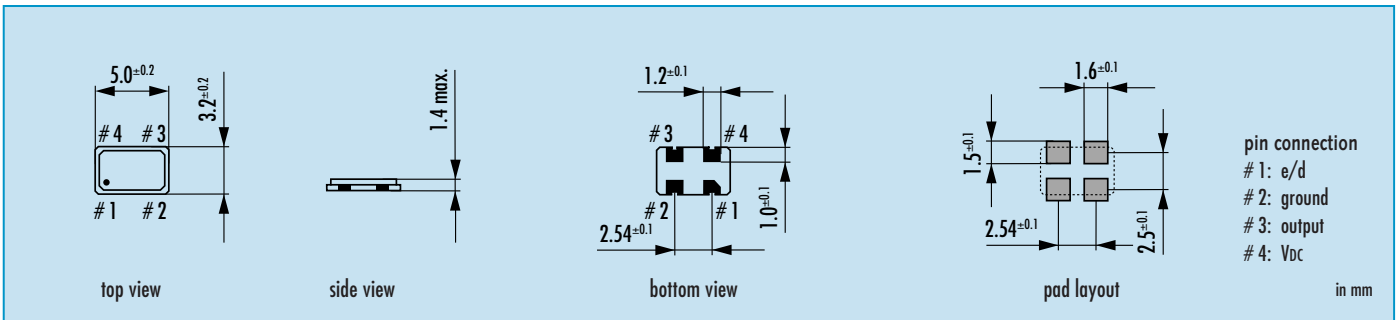

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	0.5 ~ 110.0 MHz	JO53	see table 1	5.0 = 5.0 V	1 = 15 pF 2 = 30 pF	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: O 20.0-JO53-B-5.0-1 (LF = RoHS compliant / Pb free pins or pads)



Oscillator · JO53 · 5.0 V · Stop Function

Taping Specification

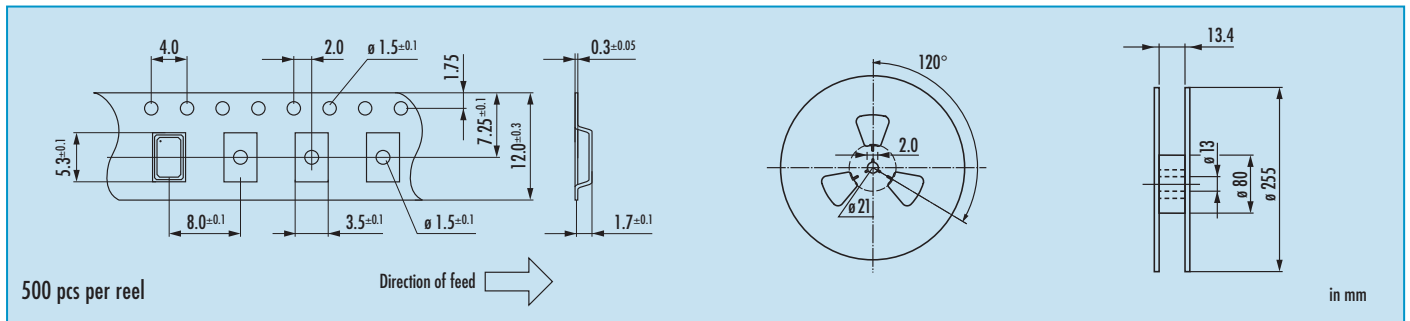

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
stop function:	
<ul style="list-style-type: none"> • oscillator stops • output high impedance 	

Marking

frequency
type / date code

date code:

A ~ M: Jan. - Dec.


2: 2012 5: 2015

3: 2013 6: 2016

4: 2014 7: 2017

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

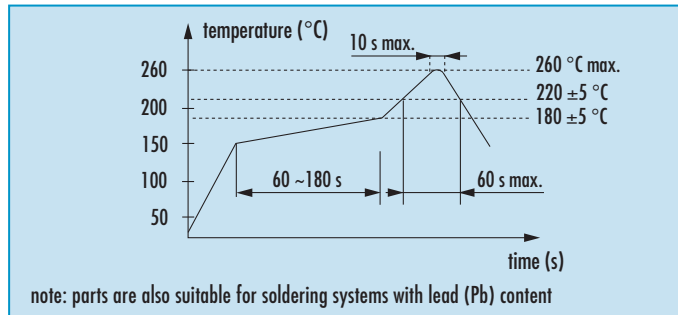

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO53 · 3.3 V

SMD Oscillator with Stop Function · 5.0 x 3.2 mm

- high temperature version available
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JO53 3.3 V	
frequency range	0.50 ~ 125.0 MHz (15 pF max.)	
	0.50 ~ 50.0 MHz (30 pF max.)	
	2.00 ~ 50.0 MHz (15 pF max. for T2 & T3*)	
frequency stability over all**	± 20 ppm ~ ± 100 ppm (table 1)	
current consumption	see table 2	
supply voltage V_{DC}	3.3 V ± 5%	
temperature	operating	-10 °C ~ +70 °C
		-40 °C ~ +85 °C
		-40 °C ~ +105 °C
		-40 °C ~ +125 °C ask if available
storage	-55 °C ~ +125 °C	
	output	rise & fall time
output	load max.	15 pF / 30 pF (≤ +85 °C and ≤ 50.0 MHz)
	current max.	5 mA / 4 mA (T2 & T3*)
	low level max.	0.1 x V _{DC} / 0.4 V (T2 & T3*)
	high level min.	0.9 x V _{DC} / V _{DC} - 0.4 V (T2 & T3*)
output enable time max.	10 ms	
output disable time max.	150 ns / 200 ns (T2 & T3*)	
start-up time max.	10 ms	
standby function	stop	
standby current max.	10 µA / 20 µA (T2 & T3*)	
phase jitter 12 kHz ~ 20.0 MHz	< 1.0 ps RMS	
symmetry at 0.5 x V_{DC}	45% ~ 55% (40% ~ 60% max.)	

Table 1: Frequency Stability Code

stability code		A	B	G	C	D
		± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm
-20 °C ~ +70 °C	STD.		●	○	○	△
-40 °C ~ +85 °C	T1	●	●	○	○	
-40 °C ~ +105 °C	T2	○	○			
-40 °C ~ +125 °C	T3*	■				

● standard ○ available ■ ask if available △ excludes aging

** includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.

Current at 15 pF load		Current at 30 pF load	
0.5 ~ 29.9 MHz	10 mA	0.5 ~ 29.9 MHz	10 mA
30.0 ~ 49.9 MHz	20 mA	30.0 ~ 50.0 MHz	25 mA
50.0 ~ 79.9 MHz	30 mA		
80.0 ~ 125.0 MHz	45 mA		


Table 3: Rise & Fall Time max.

at 15 pF		at 30 pF	
6 ns:	0.50 ~ 1.79 MHz	7 ns:	0.50 ~ 50.00 MHz
5 ns:	1.80 ~ 49.99 MHz		
4 ns:	50.00 ~ 125.00 MHz		


note: rise time: 0.1 V_{DC} ~ 0.9 V_{DC} / fall time: 0.9 V_{DC} ~ 0.1 V_{DC}
specific data on request

Dimensions

* ask if available

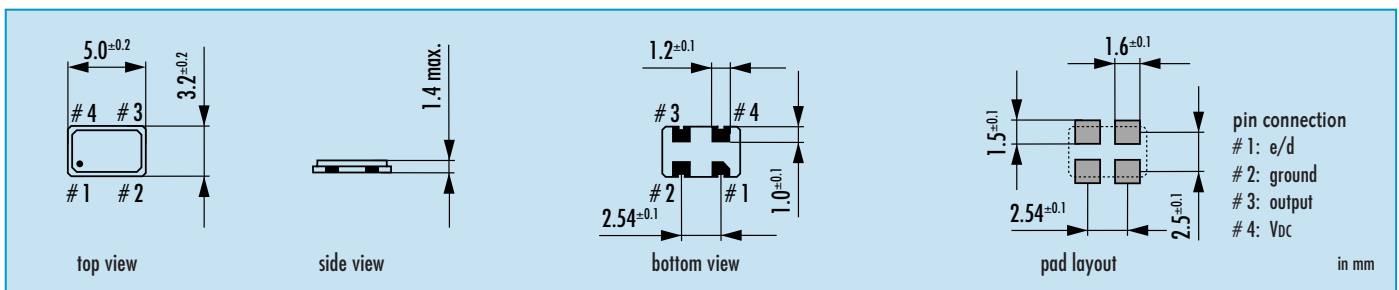


Order Information

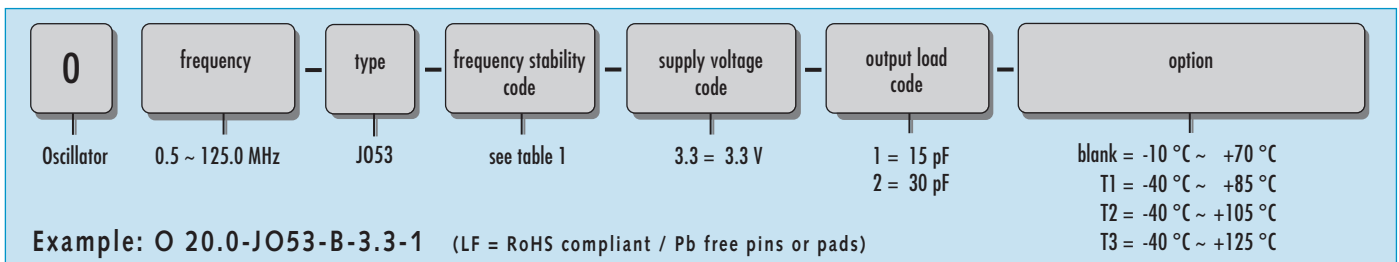

Oscillator · JO53 · 3.3 V · Stop Function

Taping Specification

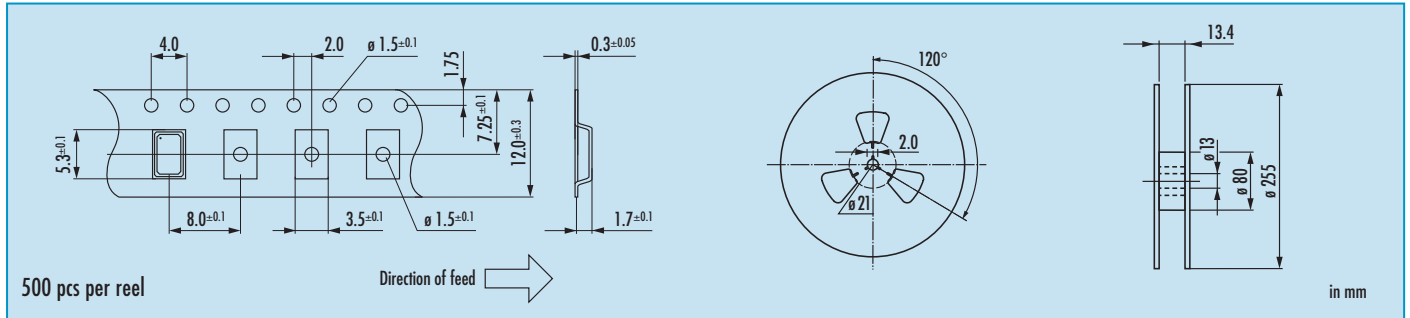

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
stop function:	
<ul style="list-style-type: none"> oscillator stops output high impedance 	

Marking

frequency
type / date code

date code:

A ~ M: Jan. - Dec.


2: 2012 5: 2015

3: 2013 6: 2016

4: 2014 7: 2017

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

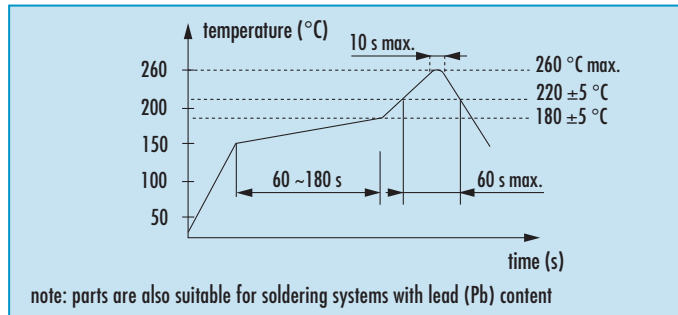

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO53H · 3.3 V

High Stability Oscillator with Stop Function · 5.0 x 3.2 mm

- high stability temp. compensated oscillator with CMOS output
- stability meets spec for WiMax and WLAN
- RoHS compliant, ceramic/metal package
- reflow soldering temperature: 260°C max.



General Data

type	JO53H 3.3V	
frequency range	4.0 ~ 54.0 MHz	
frequency stability over all*	± 8ppm ~ ± 13ppm (table 1)	
aging 1st year	± 2ppm max.	
current consumption	7mA max.	
supply voltage VDC	3.3V ±10%	
temperature	operating	-20°C ~ +70°C / -40°C ~ +85°C
	storage	-40°C ~ +85°C
output	rise & fall time	see table 2
	load max.	15pF
	current max.	4mA
	low level max.	0.1 x VDC
	high level min.	0.9 x VDC
output enable time max.	1ms	
output disable time max.	250ns	
start-up time max.	2ms	
standby function	stop	
standby current max.	5µA	
phase jitter 12kHz~20MHz	< 0.1ps RMS typ.	
symmetry at 0.5 x VDC	45% ~ 55% max.	

Table 1: Frequency Stability Code

stability code	K	F	H			
	± 13 ppm	± 10 ppm	± 8 ppm			
-20 °C ~ +70 °C	○	○	○			
-40 °C ~ +85 °C	○	○	○			

○ available

* includes stability at 25°C, operating temp. range, supply voltage change, load change, vibration, aging 1st year

Table 2: Rise & Fall Time max.

5.0 ns: 4.0 ~ 54.0 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
------------------------	--


Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" (V _{IH} ≥ 0.7 V _{DC})	active
low "0" (V _{IL} ≤ 0.3 V _{DC})	high impedance


stop function:

- oscillator stops
- output high impedance

Dimensions

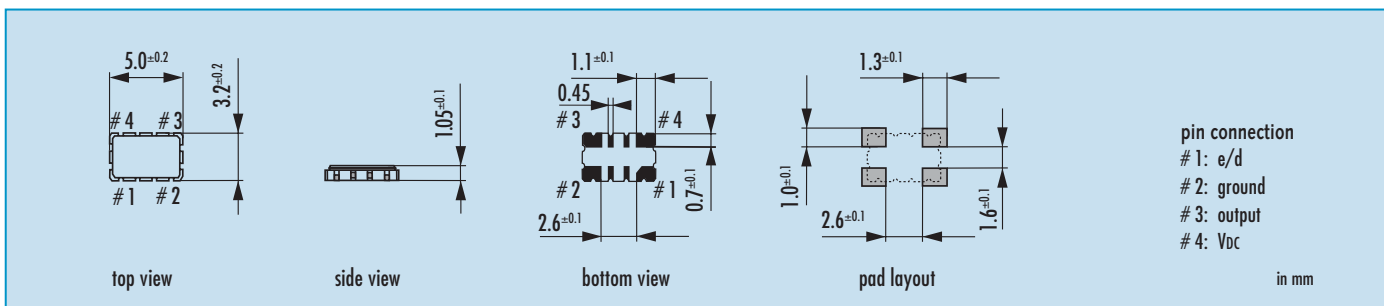


Order Information

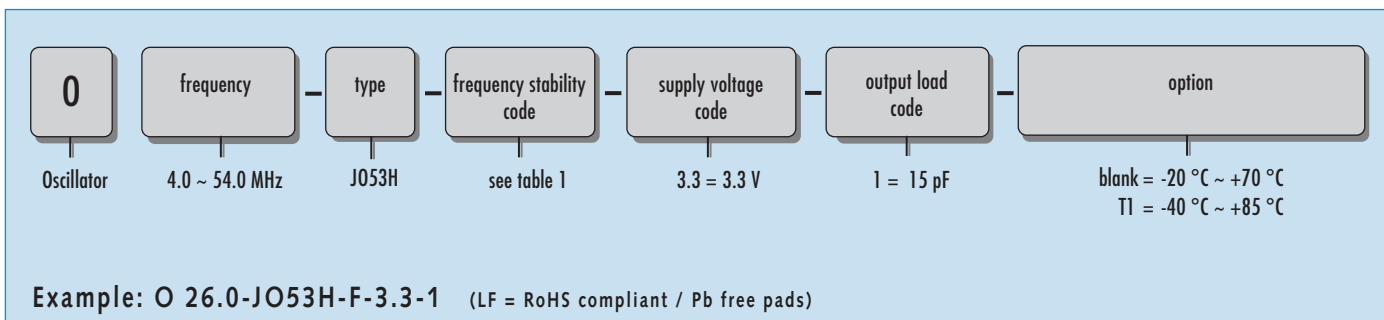


Oscillator · JO53H · 3.3 V · High Stability

Taping Specification

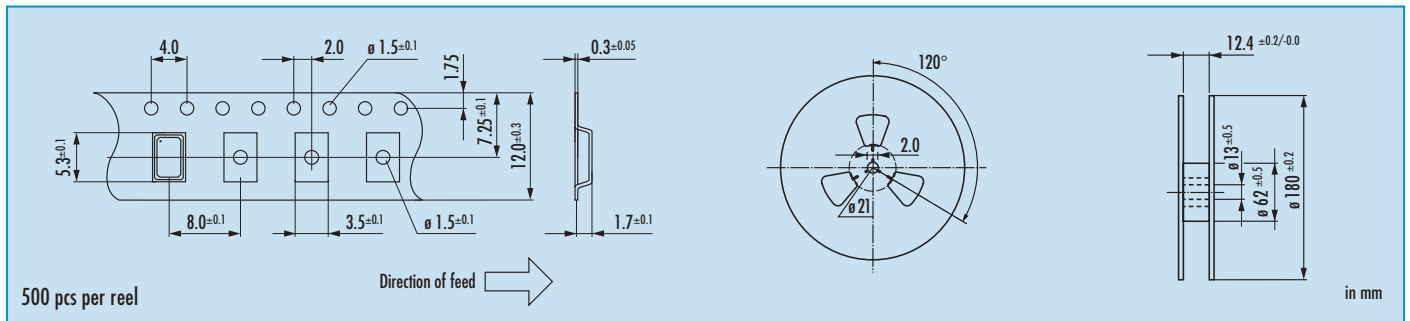

Reflow Soldering Profile

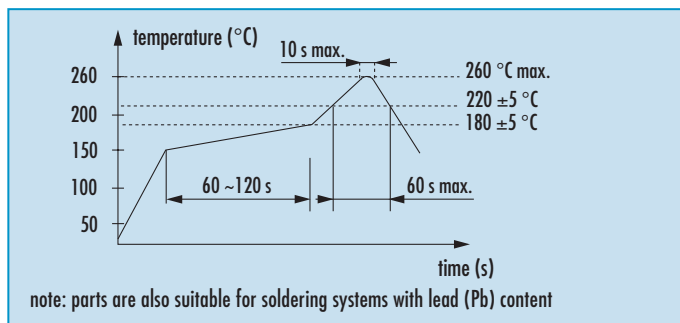

Marking

frequency / company code / frequency stability code / date code

date code:

A ~ M: Jan. - Dec.

7: 2007

8: 2008

9: 2009

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO53 · 3.0 V

SMD Oscillator with Stop Function · 5.0 x 3.2 mm

- high temperature version available
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JO53 3.0 V		
frequency range	0.50 ~ 125.0 MHz (15 pF max.)		
	0.50 ~ 50.0 MHz (30 pF max.)		
	2.00 ~ 50.0 MHz (15 pF max. for T2 & T3*)		
frequency stability over all**	± 20 ppm ~ ± 100 ppm (table 1)		
current consumption	see table 2		
supply voltage V _{DC}	3.0 V ± 5%		
temperature	operating	-10 °C ~ +70 °C	
		-40 °C ~ +85 °C	
		-40 °C ~ +105 °C	
		-40 °C ~ +125 °C ask if available	
storage	-55 °C ~ +125 °C		
	output	rise & fall time	see table 3
output	load max.	15 pF / 30 pF (≤ +85 °C and ≤ 50.0 MHz)	
	current max.	5 mA / 4 mA (T2 & T3*)	
	low level max.	0.1 x V _{DC} / 0.4 V (T2 & T3*)	
	high level min.	0.9 x V _{DC} / V _{DC} - 0.4 V (T2 & T3*)	
output enable time max.	10 ms		
output disable time max.	150 ns / 200 ns (T2 & T3*)		
start-up time max.	10 ms		
standby function	stop		
standby current max.	10 µA / 20 µA (T2 & T3*)		
phase jitter 12 kHz ~ 20.0 MHz	< 1.0 ps RMS		
symmetry at 0.5 x V _{DC}	45% ~ 55% (40% ~ 60% max.)		

* ask if available

Table 1: Frequency Stability Code

stability code		A	B	G	C	D
		± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm
-20 °C ~ +70 °C	STD.		●	○	○	△
-40 °C ~ +85 °C	T1	●	●	○	○	
-40 °C ~ +105 °C	T2	○	○			
-40 °C ~ +125 °C	T3*	■				

● standard ○ available ■ ask if available △ excludes aging

** includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


Current at 15 pF load		Current at 30 pF load	
0.5 ~ 29.9 MHz	10 mA	0.5 ~ 29.9 MHz	10 mA
30.0 ~ 49.9 MHz	20 mA	30.0 ~ 50.0 MHz	25 mA
50.0 ~ 79.9 MHz	30 mA		
80.0 ~ 125.0 MHz	40 mA		

Table 3: Rise & Fall Time max.


at 15 pF		at 30 pF	
6 ns:	0.50 ~ 1.79 MHz	7 ns:	0.50 ~ 50.00 MHz
5 ns:	1.80 ~ 49.99 MHz		
4 ns:	50.00 ~ 125.00 MHz		

note: rise time: 0.1 V_{DC} ~ 0.9 V_{DC} / fall time: 0.9 V_{DC} ~ 0.1 V_{DC}
specific data on request

Dimensions

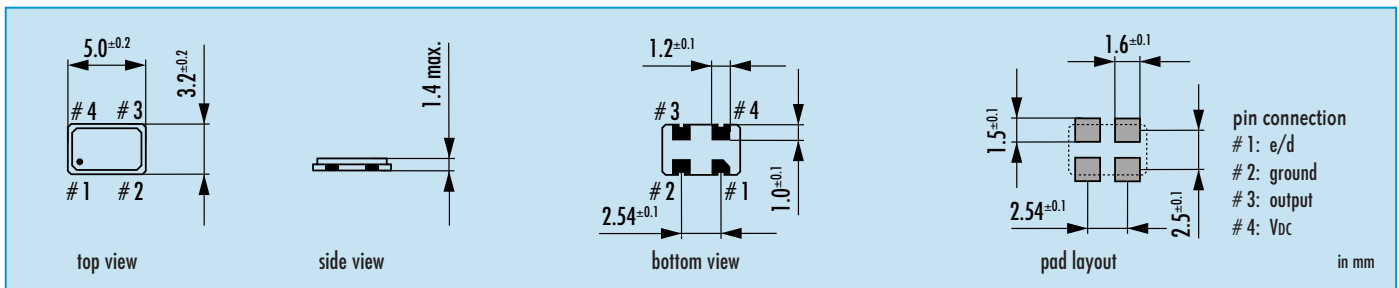


Order Information

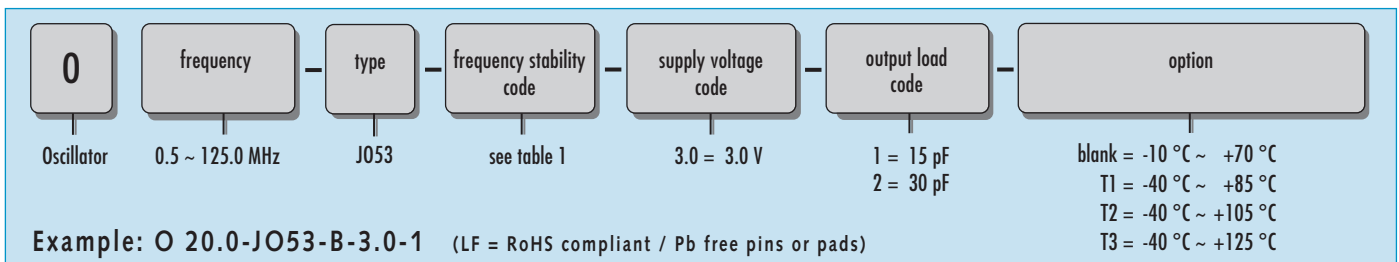

Oscillator · JO53 · 3.0 V · Stop Function

Taping Specification

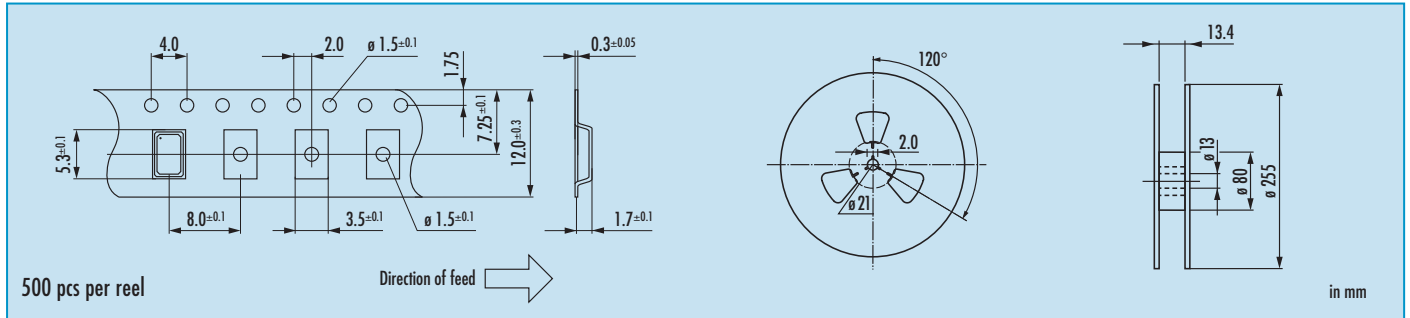

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance

stop function:

- oscillator stops
- output high impedance

Marking

frequency
type / date code

date code:

A ~ M: Jan. - Dec.


2: 2012 5: 2015

3: 2013 6: 2016

4: 2014 7: 2017

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

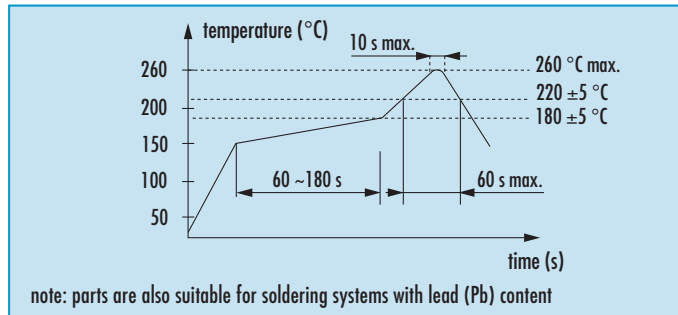

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO53 · 2.8 V

SMD Oscillator with Stop Function · 5.0 x 3.2 mm

- high temperature version available
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JO53 2.8 V		
frequency range	0.50 ~ 80.0 MHz (15 pF max.)		
	0.50 ~ 50.0 MHz (30 pF max.)		
	2.00 ~ 50.0 MHz (15 pF max. for T2 & T3*)		
frequency stability over all**	± 20 ppm ~ ± 100 ppm (table 1)		
current consumption	see table 2		
supply voltage V_{DC}	2.8 V ± 5%		
temperature	operating	-10 °C ~ +70 °C	
		-40 °C ~ +85 °C	
		-40 °C ~ +105 °C	
		-40 °C ~ +125 °C ask if available	
storage	-55 °C ~ +125 °C		
	output	rise & fall time	see table 3
output	load max.	15 pF / 30 pF (≤ +85 °C and ≤ 50.0 MHz)	
	current max.	5 mA / 4 mA (T2 & T3*)	
	low level max.	0.1 x V _{DC} / 0.4 V (T2 & T3*)	
	high level min.	0.9 x V _{DC} / V _{DC} - 0.4 V (T2 & T3*)	
output enable time max.	10 ms		
output disable time max.	200 ns		
start-up time max.	10 ms		
standby function	stop		
standby current max.	10 µA / 20 µA (T2 & T3*)		
phase jitter 12 kHz ~ 20.0 MHz	< 1.0 ps RMS		
symmetry at 0.5 x V_{DC}	45% ~ 55% (40% ~ 60% max.)		

* ask if available

Table 1: Frequency Stability Code

stability code		A	B	G	C	D
		± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm
-20 °C ~ +70 °C	STD.		●	○	○	△
-40 °C ~ +85 °C	T1	●	●	○	○	
-40 °C ~ +105 °C	T2	○	○			
-40 °C ~ +125 °C	T3*	■				

● standard ○ available ■ ask if available △ excludes aging

** includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


Current at 15 pF load		Current at 30 pF load	
0.5 ~ 14.9 MHz	6 mA	0.5 ~ 14.9 MHz	10 mA
15.0 ~ 29.9 MHz	8 mA	15.0 ~ 29.9 MHz	12 mA
30.0 ~ 39.9 MHz	12 mA	30.0 ~ 39.9 MHz	15 mA
40.0 ~ 49.9 MHz	15 mA	40.0 ~ 50.0 MHz	20 mA
50.0 ~ 59.9 MHz	20 mA		
60.0 ~ 80.0 MHz	30 mA		

Table 3: Rise & Fall Time max.


at 15 pF		at 30 pF	
6 ns:	0.50 ~ 1.79 MHz	8 ns:	0.50 ~ 50.00 MHz
5 ns:	1.80 ~ 49.99 MHz		
4 ns:	50.00 ~ 80.00 MHz		

note: rise time: 0.1 V_{DC} ~ 0.9 V_{DC} / fall time: 0.9 V_{DC} ~ 0.1 V_{DC}
specific data on request

Dimensions

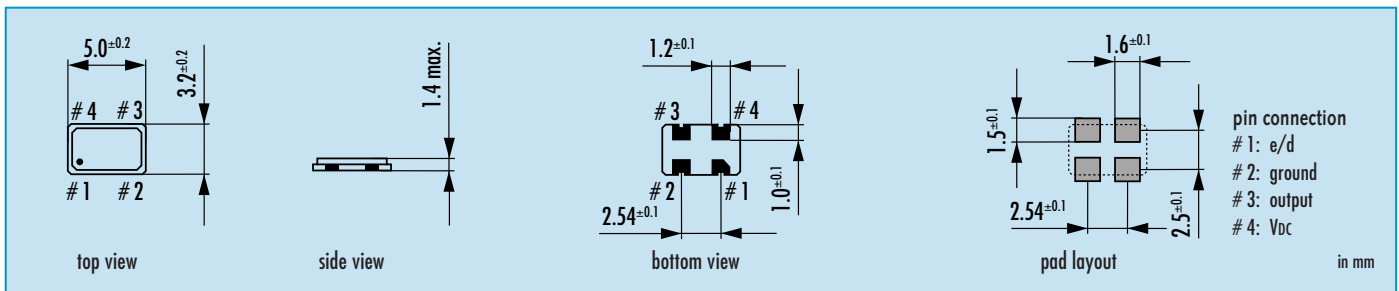


Order Information

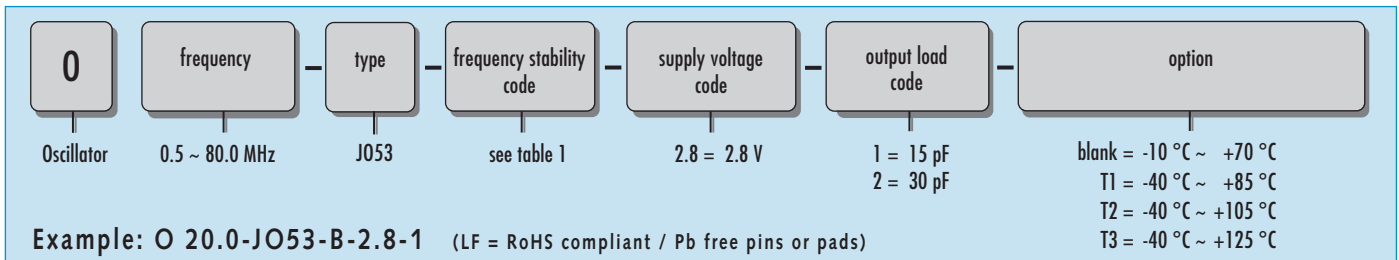

Oscillator · JO53 · 2.8 V · Stop Function

Taping Specification

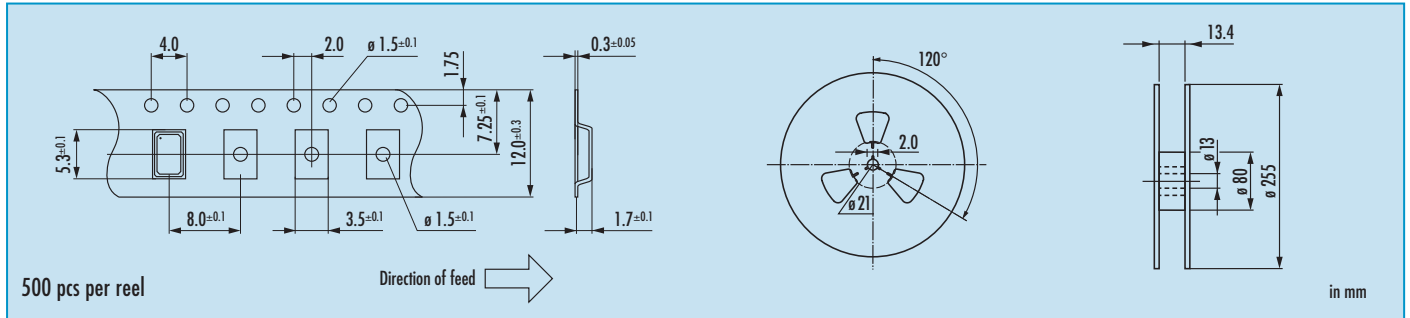

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
stop function:	
<ul style="list-style-type: none"> oscillator stops output high impedance 	

Marking

frequency
type / date code

date code:

A ~ M: Jan. - Dec.


2: 2012 5: 2015

3: 2013 6: 2016

4: 2014 7: 2017

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

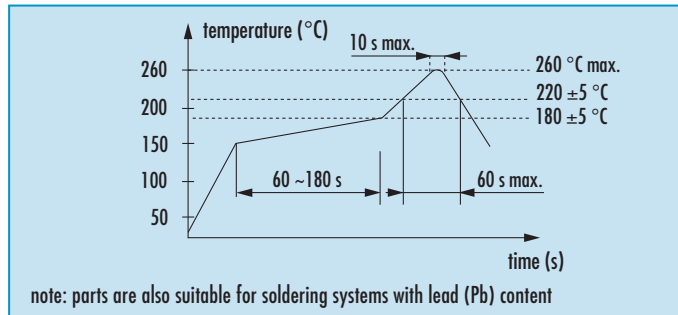

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO53 · 2.5 V

SMD Oscillator with Stop Function · 5.0 x 3.2 mm

- high temperature version available
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JO53 2.5 V		
frequency range	0.50 ~ 80.0 MHz (15 pF max.)		
	0.50 ~ 50.0 MHz (30 pF max.)		
	2.00 ~ 50.0 MHz (15 pF max. for T2 & T3*)		
frequency stability over all**	± 20 ppm ~ ± 100 ppm (table 1)		
current consumption	see table 2		
supply voltage V _{DC}	2.5 V ± 5%		
temperature	operating	-10 °C ~ +70 °C	
		-40 °C ~ +85 °C	
		-40 °C ~ +105 °C	
		-40 °C ~ +125 °C ask if available	
storage	-55 °C ~ +125 °C		
	output	rise & fall time	see table 3
output	load max.	15 pF / 30 pF (≤ +85 °C and ≤ 50.0 MHz)	
	current max.	4 mA	
	low level max.	0.1 x V _{DC} / 0.4 V (T2 & T3*)	
	high level min.	0.9 x V _{DC} / V _{DC} - 0.4 V (T2 & T3*)	
output enable time max.	10 ms		
output disable time max.	200 ns		
start-up time max.	10 ms		
standby function	stop		
standby current max.	10 µA / 20 µA (T2 & T3*)		
phase jitter 12 kHz ~ 20.0 MHz	< 1.0 ps RMS		
symmetry at 0.5 x V _{DC}	45% ~ 55% (40% ~ 60% max.)		

* ask if available

Table 1: Frequency Stability Code

stability code		A	B	G	C	D
		± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm
-20 °C ~ +70 °C	STD.		●	○	○	△
-40 °C ~ +85 °C	T1	●	●	○	○	
-40 °C ~ +105 °C	T2	○	○			
-40 °C ~ +125 °C	T3*	■				

● standard ○ available ■ ask if available △ excludes aging

** includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


Current at 15 pF load		Current at 30 pF load	
0.5 ~ 14.9 MHz	6 mA	0.5 ~ 14.9 MHz	8 mA
15.0 ~ 29.9 MHz	8 mA	15.0 ~ 29.9 MHz	10 mA
30.0 ~ 39.9 MHz	10 mA	30.0 ~ 39.9 MHz	13 mA
40.0 ~ 49.9 MHz	13 mA	40.0 ~ 50.0 MHz	15 mA
50.0 ~ 59.9 MHz	16 mA		
60.0 ~ 80.0 MHz	20 mA		

Table 3: Rise & Fall Time max.


at 15 pF		at 30 pF	
6 ns:	0.50 ~ 1.79 MHz	8 ns:	0.50 ~ 50.00 MHz
5 ns:	1.80 ~ 49.99 MHz		
4 ns:	50.00 ~ 80.00 MHz		

note: rise time: 0.1 V_{DC} ~ 0.9 V_{DC} / fall time: 0.9 V_{DC} ~ 0.1 V_{DC}
specific data on request

Dimensions

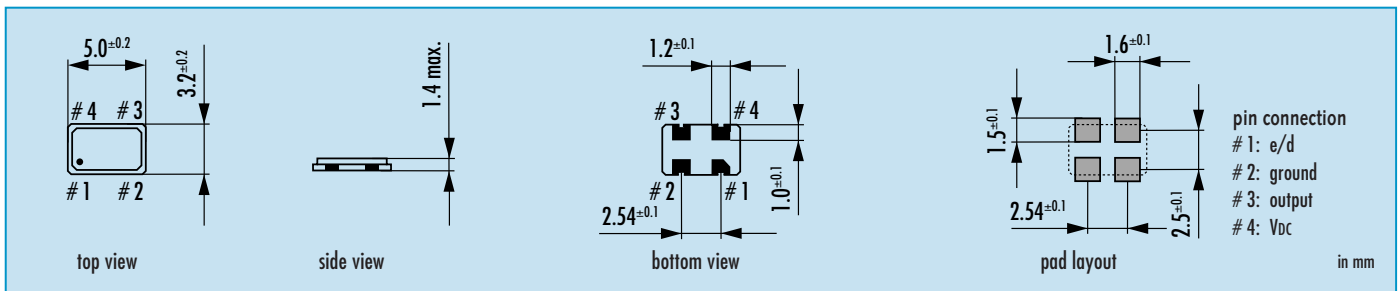


Order Information

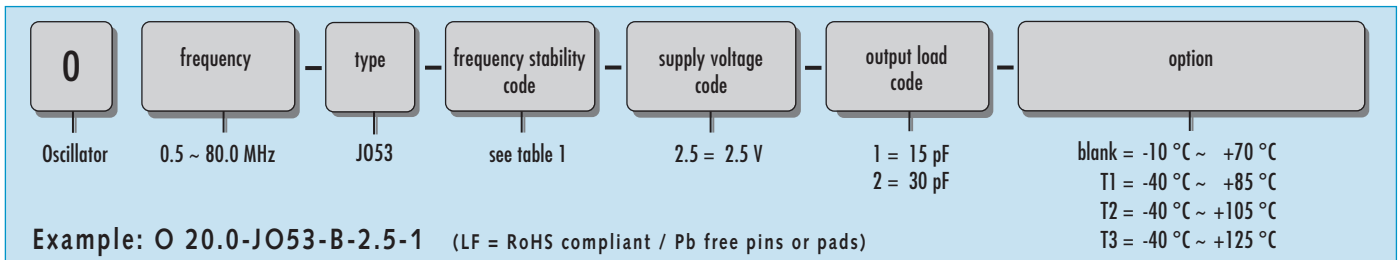

Oscillator · JO53 · 2.5 V · Stop Function

Taping Specification

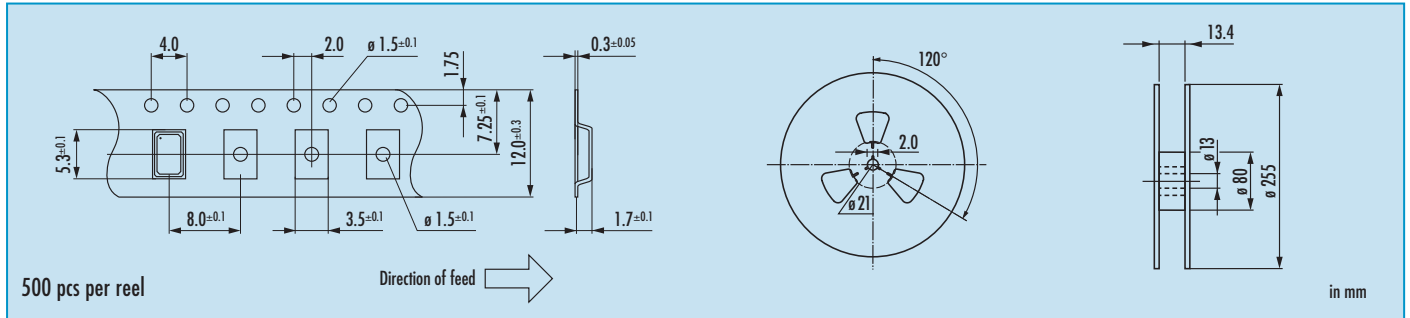

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
stop function:	
<ul style="list-style-type: none"> • oscillator stops • output high impedance 	

Marking

frequency
type / date code

date code:

A ~ M: Jan. - Dec.


2: 2012 5: 2015

3: 2013 6: 2016

4: 2014 7: 2017

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

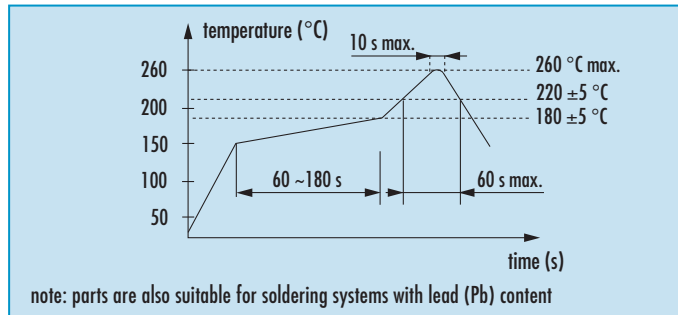

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO53H · 2.5 V

High Stability Oscillator with Stop Function · 5.0 x 3.2 mm

- high stability temp. compensated oscillator CMOS output
- stability meets spec for WiMax and WLAN
- RoHS compliant, ceramic/metal package
- reflow soldering temperature: 260°C max.



General Data

type	JO53H 2.5V	
frequency range	4.0 ~ 54.0 MHz	
frequency stability over all*	± 8ppm ~ ± 13ppm (table 1)	
aging 1st year	± 2ppm max.	
current consumption	7mA max.	
supply voltage VDC	2.5V ± 10%	
temperature	operating	-20°C ~ +70°C / -40°C ~ +85°C
	storage	-40°C ~ +85°C
output	rise & fall time	see table 2
	load max.	15pF
	current max.	4mA
	low level max.	0.1 x VDC
	high level min.	0.9 x VDC
output enable time max.	1ms	
output disable time max.	250ns	
start-up time max.	2ms	
standby function	stop	
standby current max.	5µA	
phase jitter 12kHz~20MHz	< 0.1ps RMS typ.	
symmetry at 0.5 x VDC	45% ~ 55% max.	

Table 1: Frequency Stability Code

stability code	K	F	H			
	± 13 ppm	± 10 ppm	± 8 ppm			
-20 °C ~ +70 °C	○	○	○			
-40 °C ~ +85 °C	○	○	○			
○ available						

* includes stability at 25°C, operating temp. range, supply voltage change, load change, vibration, aging 1st year


Table 2: Rise & Fall Time max.

5.0 ns: 4.0 ~ 54.0 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
------------------------	---


Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" (V _{IH} ≥ 0.7 V _{DC})	active
low "0" (V _{IL} ≤ 0.3 V _{DC})	high impedance
stop function:	
<ul style="list-style-type: none"> • oscillator stops • output high impedance 	

Dimensions

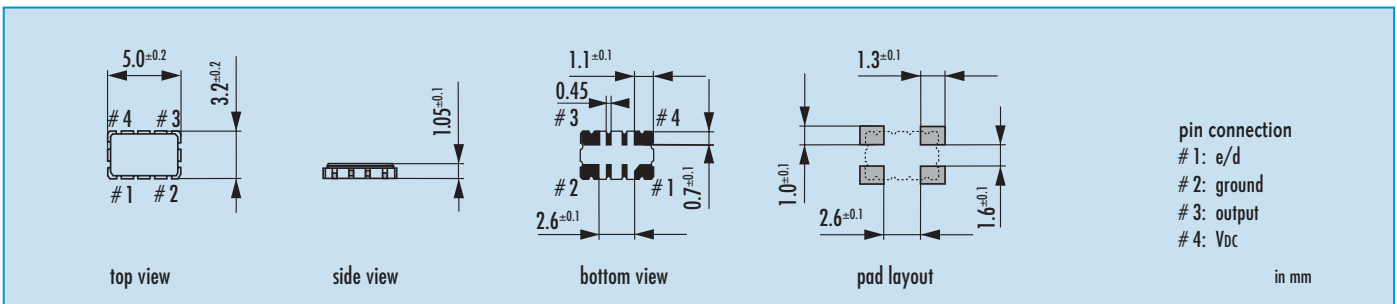


Order Information

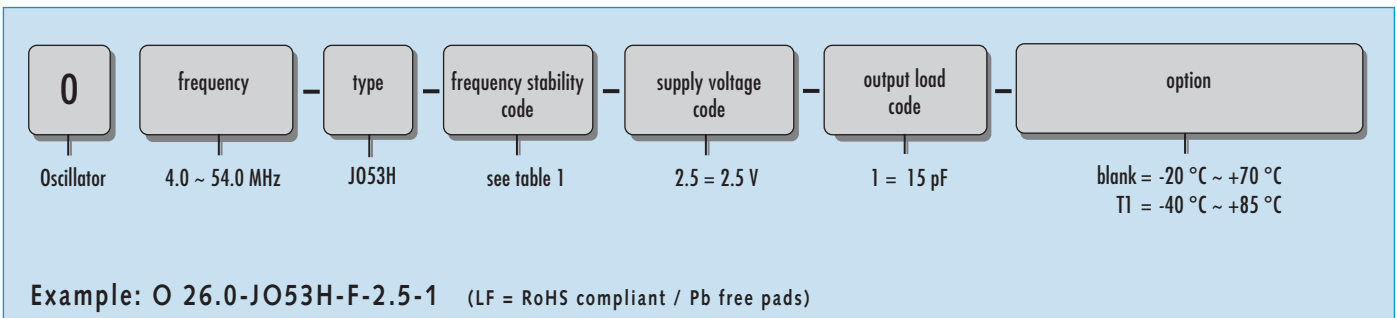


Oscillator · JO53H · 2.5 V · High Stability

Taping Specification

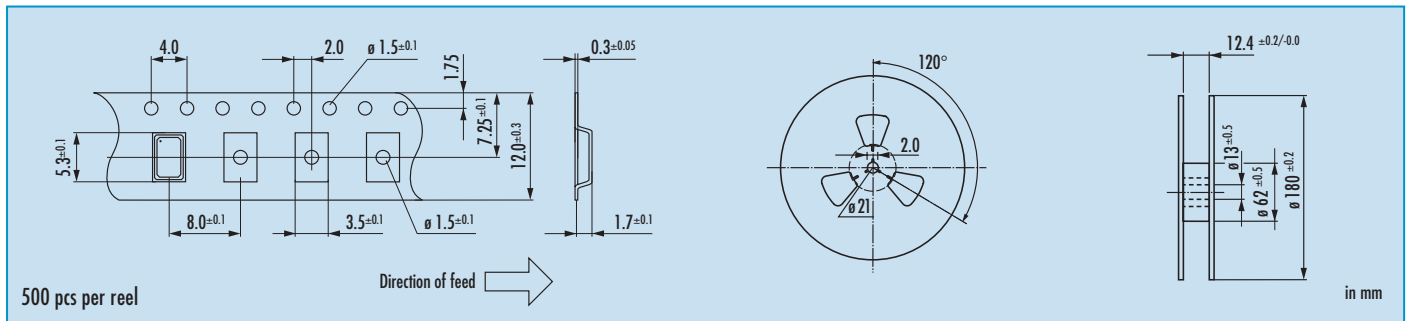

Reflow Soldering Profile

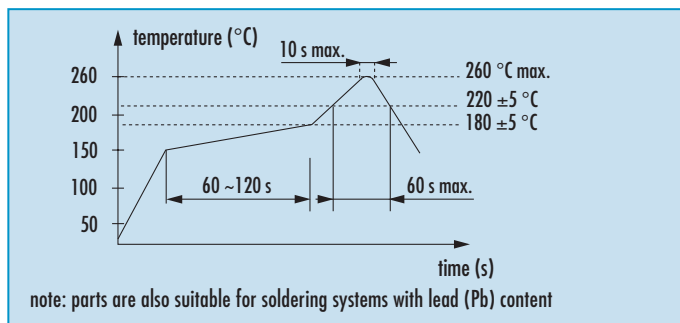

Marking

frequency / company code / frequency stability code / date code

date code:

A ~ M: Jan. - Dec.

7: 2007

8: 2008

9: 2009

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO53 · 1.8 V

SMD Oscillator with Stop Function · 5.0 x 3.2 mm

- high temperature version available
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JO53 1.8 V		
frequency range	0.50 ~ 125.0 MHz (15 pF max.)		
	0.50 ~ 40.0 MHz (30 pF max.)		
	2.00 ~ 50.0 MHz (15 pF max. for T2 & T3*)		
frequency stability over all**	± 20 ppm ~ ± 100 ppm (table 1)		
current consumption	see table 2		
supply voltage V _{DC}	1.8 V ± 5%		
temperature	operating	-10 °C ~ +70 °C	
		-40 °C ~ +85 °C	
		-40 °C ~ +105 °C	
		-40 °C ~ +125 °C ask if available	
storage	-55 °C ~ +125 °C		
	output	rise & fall time	see table 3
output	load max.	15 pF / 30 pF (≤ +85 °C and ≤ 40.0 MHz)	
	current max.	4 mA	
	low level max.	0.4 V	
	high level min.	V _{DC} - 0.4 V	
output enable time max.	10 ms		
output disable time max.	50 ns / 200 ns (T2 & T3*)		
start-up time max.	10 ms		
standby function	stop		
standby current max.	10 µA		
phase jitter 12 kHz ~ 20.0 MHz	< 1.0 ps RMS		
symmetry at 0.5 x V _{DC}	45% ~ 55% (40% ~ 60% max.)		

* ask if available

Table 1: Frequency Stability Code

stability code		A	B	G	C	D
		± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm
-20 °C ~ +70 °C	STD.		●	○	○	△
-40 °C ~ +85 °C	T1	●	●	○	○	
-40 °C ~ +105 °C	T2	○	○			
-40 °C ~ +125 °C	T3*	■				

● standard ○ available ■ ask if available △ excludes aging

** includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


Current at 15 pF load		Current at 30 pF load	
0.5 ~ 29.9 MHz	7 mA	0.5 ~ 29.9 MHz	10 mA
30.0 ~ 39.9 MHz	7 mA	30.0 ~ 40.0 MHz	10 mA
40.0 ~ 89.9 MHz	20 mA		
90.0 ~ 125.0 MHz	25 mA		

Table 3: Rise & Fall Time max.

at 15 pF		at 30 pF	
6 ns:	0.50 ~ 29.99 MHz	8 ns:	0.50 ~ 40.00 MHz
5 ns:	30.00 ~ 39.99 MHz		
5 ns:	40.00 ~ 49.99 MHz		
4 ns:	50.00 ~ 69.99 MHz		
3 ns:	70.00 ~ 125.00 MHz		

note: rise time: 0.1 V_{DC} ~ 0.9 V_{DC} / fall time: 0.9 V_{DC} ~ 0.1 V_{DC}
specific data on request

Dimensions

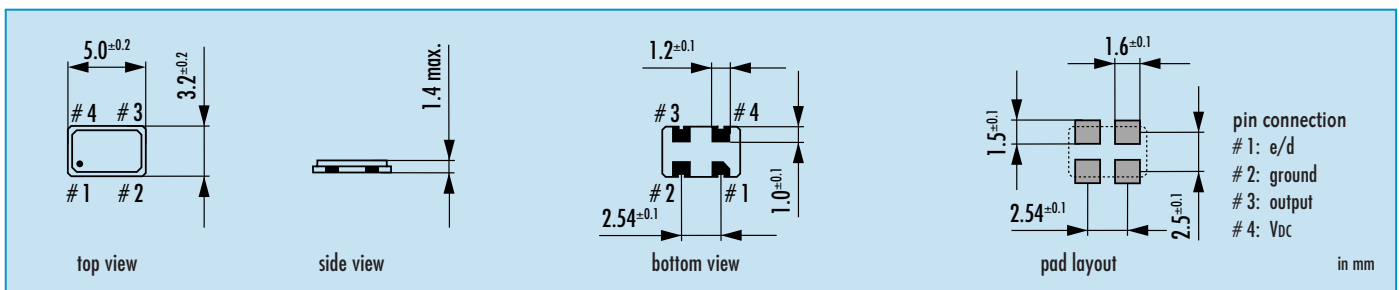

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	0.5 ~ 125.0 MHz	JO53	see table 1	1.8 = 1.8 V	1 = 15 pF 2 = 30 pF	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C T3 = -40 °C ~ +125 °C

Example: O 20.0-JO53-B-1.8-1 (LF = RoHS compliant / Pb free pins or pads)



Oscillator · JO53 · 1.8 V · Stop Function

Taping Specification

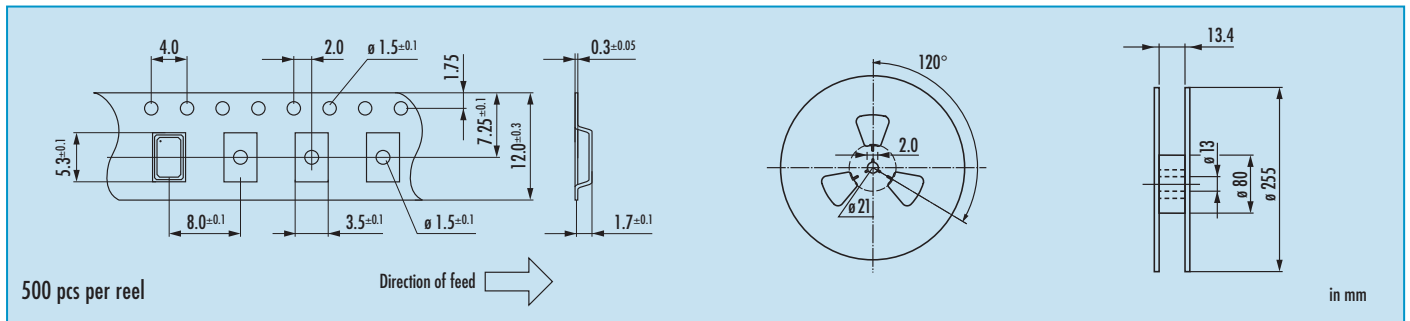

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
stop function:	
<ul style="list-style-type: none"> oscillator stops output high impedance 	

Marking

frequency
type / date code

date code:

A ~ M: Jan. - Dec.


2: 2012 5: 2015

3: 2013 6: 2016

4: 2014 7: 2017

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

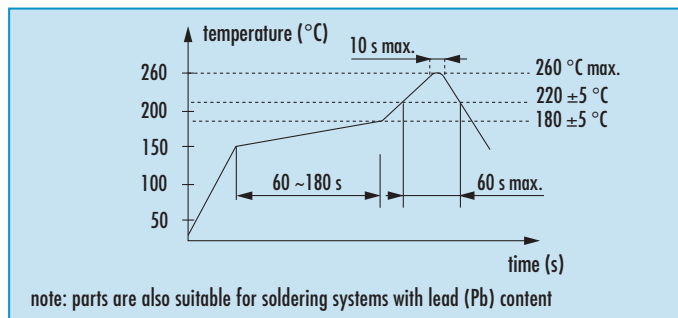

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO32 · 3.3 V

SMD Oscillator with Stop Function · 3.2 x 2.5 mm

- reflow soldering temperature: 260 °C max.
- compact & flat ceramic/metal package



General Data

type	JO32 3.3 V
frequency range	0.75 ~ 80.0 MHz (15 pF max.)
	0.75 ~ 50.0 MHz (30 pF max.)
higher frequencies	80.0 ~ 135.0 MHz (15 pF max.)*
frequency stability over all**	± 20 ppm ~ ± 100 ppm (table 1)
current consumption	see table 2
supply voltage V _{DC}	3.3 V ± 5%
temperature	operating -10 °C ~ +70 °C / -40 °C ~ +85 °C / -40 °C ~ +105 °C
	storage -55 °C ~ +125 °C
output	rise & fall time see table 3
	load max. 15 pF / 30 pF (≤ +85 °C and ≤ 50.0 MHz)
	current max. 4 mA / 5 mA
	low level max. 0.4 V
	high level min. V _{DC} - 0.4 V
output enable time max.	10 ms
output disable time max.	50 µs
start-up time max.	10 ms
standby function	stop
standby current max.	5 µA
phase jitter 12 kHz ~ 20.0 MHz	< 1.0 ps RMS
symmetry at 0.5 x V _{DC}	45% ~ 55% (40% ~ 60% max.)

* ask if available

Table 1: Frequency Stability Code

stability code / temp. code**	A	B	G	C	D
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm
-20 °C ~ +70 °C		○	○	○	△
-40 °C ~ +85 °C T1	○	○	○		
-40 °C ~ +105 °C T2	○	○			

○ available △ excludes aging

** includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


Current at 15 pF load		Current at 30 pF load	
0.75 ~ 19.9 MHz	4 mA	0.75 ~ 19.9 MHz	6 mA
20.00 ~ 39.9 MHz	7 mA	20.00 ~ 39.9 MHz	13 mA
40.00 ~ 59.9 MHz	19 mA	40.00 ~ 50.0 MHz	24 mA
60.00 ~ 79.9 MHz	24 mA		
80.00 ~ 135.0 MHz*	45 mA		

Table 3: Rise & Fall Time max.

at 15 pF	at 30 pF
5 ns: 0.75 ~ 49.99 MHz	8 ns: 0.75 ~ 49.99 MHz
4 ns: 50.00 ~ 79.99 MHz	
3 ns: 80.00 ~ 135.00 MHz*	

note: rise time: 0.1 V_{DC} ~ 0.9 V_{DC} / fall time: 0.9 V_{DC} ~ 0.1 V_{DC}
specific data on request

Dimensions

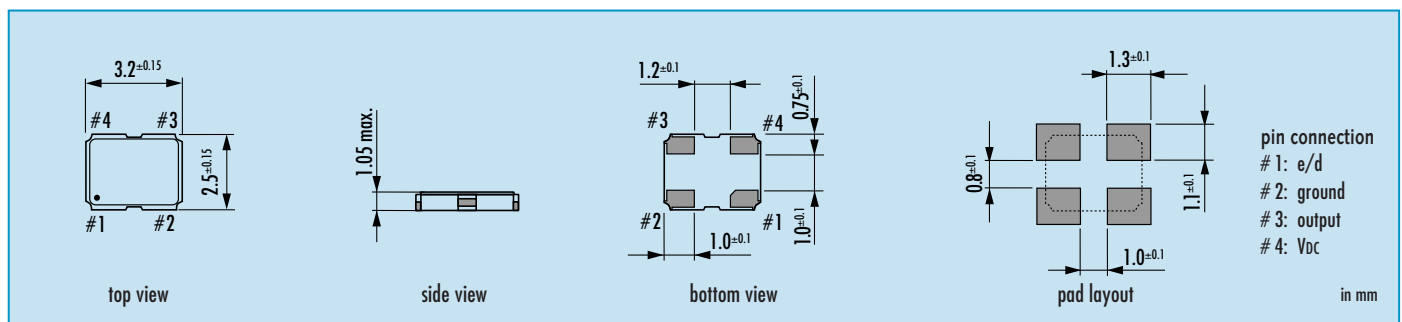

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	0.75 ~ 80.0 MHz	JO32	see table 1	3.3 = 3.3 V	1 = 15 pF 2 = 30 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C

Example: O 20.0-JO32-B-3.3-1-T1-LF (LF = RoHS compliant / Pb free pins or pads)



Oscillator · JO32 · 3.3 V · Stop Function

Taping Specification

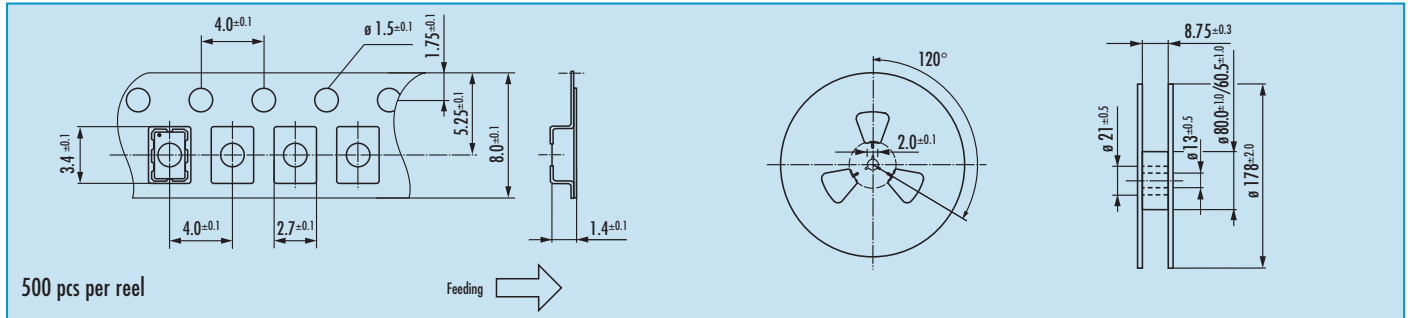

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
stop function:	
<ul style="list-style-type: none"> • oscillator stops • output high impedance 	

Marking

frequency
company code / frequency stability code / date code

date code:

A ~ M: Jan. - Dec.


1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

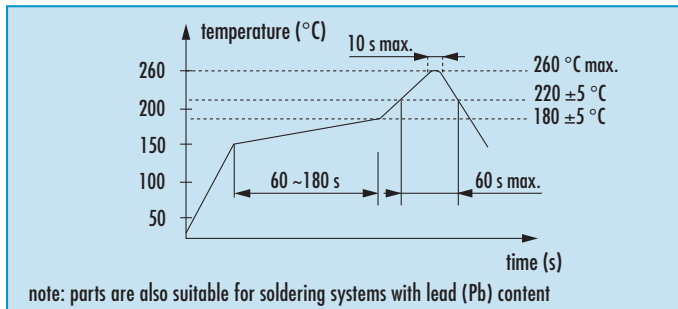

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk



Oscillator · JO32H · 3.3 V



actual size

High Stability Oscillator with Stop Function · 3.2 x 2.5 mm

- low cost high stability SMD oscillator
- stability meets spec for WiMax and WLAN
- RoHS compliant, ceramic/metal package
- reflow soldering temperature: 260 °C max.



General Data

type	JO32H 3.3V	
frequency range	2.50 ~ 60.0 MHz (15 pF max.)	
frequency stability over all*	± 8 ppm ~ ± 20 ppm (table 1)	
aging 1st year	+/-2 ppm max.	
current consumption	8 mA max.	
supply voltage V _{DC}	3.3 V ± 10%	
temperature	operating	-20 °C ~ +70 °C up to -40 °C ~ +105 °C
	storage	-40 °C ~ +85 °C
output	rise & fall time	5 nsec max.
	load max.	15 pF
	current max.	4 mA
	low level max.	0.1 x V _{DC}
	high level min.	0.9 x V _{DC}
output enable time max.	1 ms	
output disable time max.	250 ns	
start-up time max.	2 ms	
standby function	stop	
standby current max.	5 µA	
jitter	< 3.0 ps RMS typ.	
symmetry at 0.5 x VDC	45% ~ 55% max.	

Table 1: Frequency Stability Code

stability code	D	E	F	H
	± 20 ppm	± 15 ppm	± 10 ppm	± 8 ppm
-20 °C ~ +70 °C	○	○	○	○
-40 °C ~ +85 °C	○	○	○	
-40 °C ~ +105 °C	○			

○ available

* includes stability at 25°C, operating temp. range, supply voltage change, load change, vibration, aging 1st year

Table 2: Rise & Fall Time max.


5 ns: 2.5 ~ 60.0 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
----------------------	--

Enable / Disable Function

pin #1 (e/d control)	pin #4 (output)
open	active
high "1" (V _{IH} ≥ 0.7 V _{DC})	active
low "0" (V _{IL} ≤ 0.3 V _{DC})	high impedance

stop function: • oscillator stops / • output high impedance

Dimensions

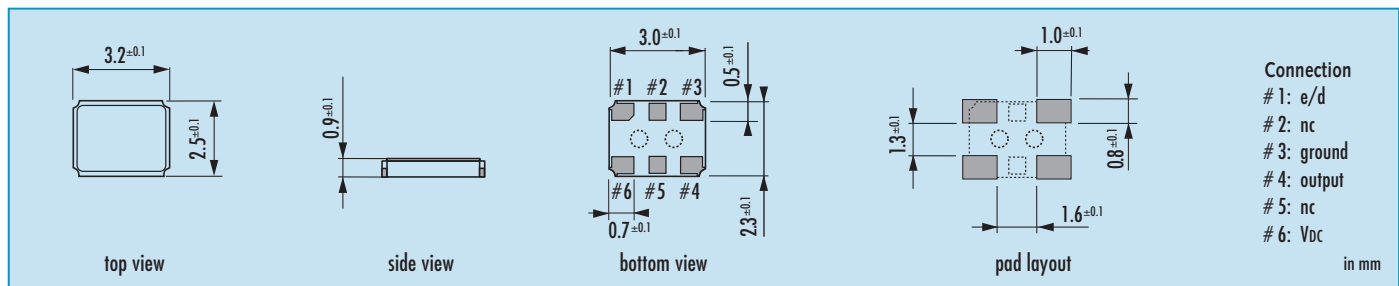

Note: please leave pins # 2, # 5 and the area underneath the package unconnected

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	2.50 ~ 60.0 MHz	JO32H	see table 1	3.3 = 3.3 V	1 = 15 pF	blank = -20°C ~ +70°C T1 = -40°C ~ +85°C T2 = -40°C ~ +105°C

Example: O 20.0-JO32H-F-3.3-1-T1-LF (LF = RoHS compliant / Pb free pins or pads)




Oscillator · JO32H · 3.3 V · Low Power

Taping Specification

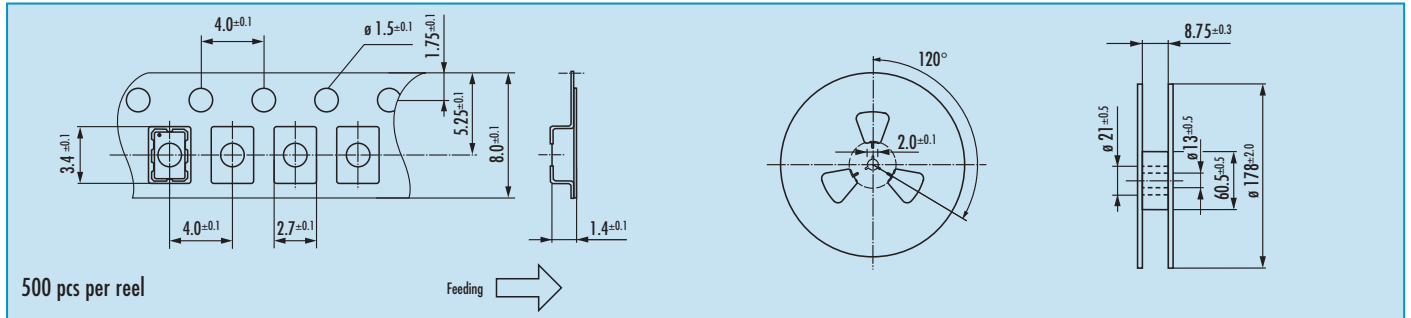

Reflow Soldering Profile

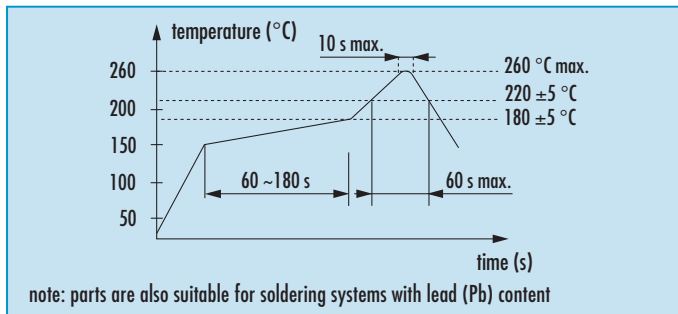

Marking

frequency
company code / frequ. stability code / date code

date code:

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

A ~ M: Jan. - Dec.
0: 2010 3: 2013
1: 2011 4: 2014
2: 2012 5: 2015

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO32 · 3.0 V

SMD Oscillator with Stop Function · 3.2 x 2.5 mm

- reflow soldering temperature: 260 °C max.
- compact & flat ceramic/metal package



General Data

type	JO32 3.0 V
frequency range	0.75 ~ 80.0 MHz (15 pF max.)
	0.75 ~ 50.0 MHz (30 pF max.)
higher frequencies	80.0 ~ 135.0 MHz (15 pF max.)*
frequency stability over all**	± 20 ppm ~ ± 100 ppm (table 1)
current consumption	see table 2
supply voltage V _{DC}	3.0 V ± 5%
temperature	operating -10 °C ~ +70 °C / -40 °C ~ +85 °C / -40 °C ~ +105 °C
	storage -55 °C ~ +125 °C
output	rise & fall time see table 3
	load max. 15 pF / 30 pF (≤ +85 °C and ≤ 50.0 MHz)
	current max. 4 mA / 5 mA
	low level max. 0.4 V
	high level min. V _{DC} - 0.4 V
output enable time max.	10 ms
output disable time max.	50 µs
start-up time max.	10 ms
standby function	stop
standby current max.	5 µA
phase jitter 12 kHz ~ 20.0 MHz	< 1.0 ps RMS
symmetry at 0.5 x V _{DC}	45% ~ 55% (40% ~ 60% max.)

* ask if available

Table 1: Frequency Stability Code

stability code / temp. code**	A	B	G	C	D
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm
-20 °C ~ +70 °C		○	○	○	△
-40 °C ~ +85 °C T1	○	○	○		
-40 °C ~ +105 °C T2	○	○			

○ available △ excludes aging

** includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


Current at 15 pF load		Current at 30 pF load	
0.75 ~ 19.9 MHz	4 mA	0.75 ~ 19.9 MHz	6 mA
20.00 ~ 39.9 MHz	7 mA	20.00 ~ 39.9 MHz	13 mA
40.00 ~ 59.9 MHz	19 mA	40.00 ~ 50.0 MHz	24 mA
60.00 ~ 79.9 MHz	24 mA		
80.00 ~ 135.0 MHz*	42 mA		

Table 3: Rise & Fall Time max.

at 15 pF	at 30 pF
5 ns: 0.75 ~ 49.99 MHz	8 ns: 0.75 ~ 49.99 MHz
4 ns: 50.00 ~ 79.99 MHz	
3 ns: 80.00 ~ 135.00 MHz*	

note: rise time: 0.1 V_{DC} ~ 0.9 V_{DC} / fall time: 0.9 V_{DC} ~ 0.1 V_{DC}
specific data on request

Dimensions

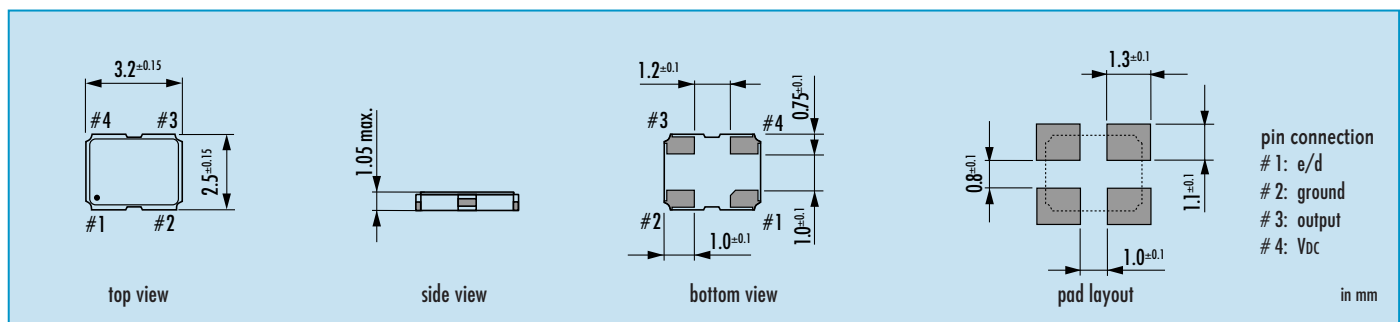

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	0.75 ~ 80.0 MHz	JO32	see table 1	3.0 = 3.0 V	1 = 15 pF 2 = 30 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C

Example: O 20.0-JO32-B-3.0-1-T1-LF (LF = RoHS compliant / Pb free pins or pads)



Oscillator · JO32 · 3.0 V · Stop Function

Taping Specification

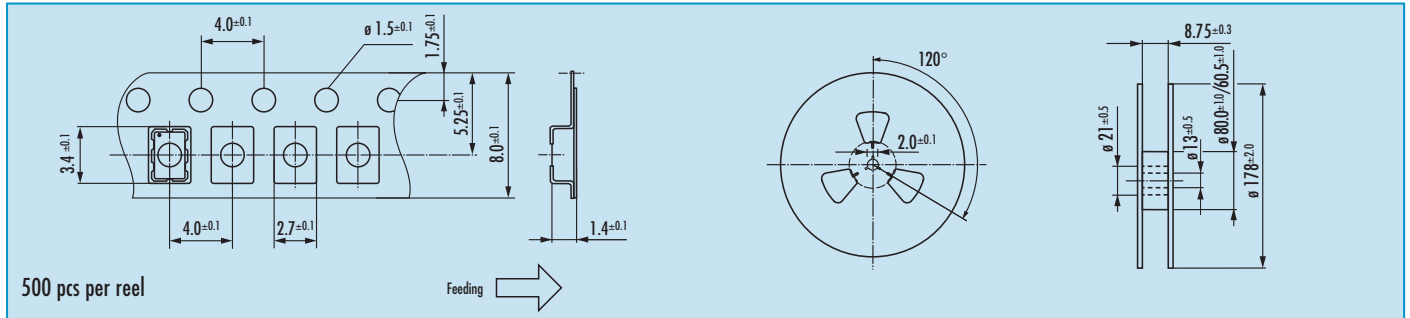

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
stop function:	
<ul style="list-style-type: none"> oscillator stops output high impedance 	

Marking

frequency
company code / frequency stability code / date code

date code:

A ~ M: Jan. - Dec.


1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

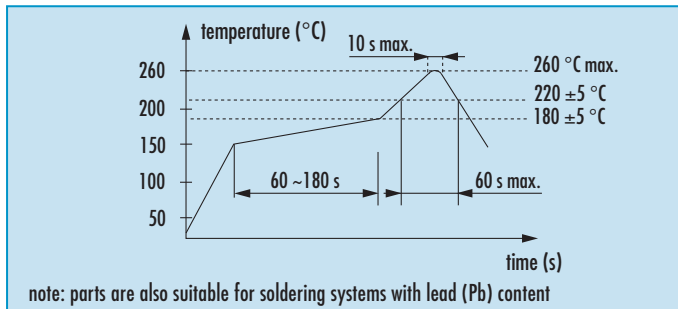

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO32 · 2.8 V

SMD Oscillator with Stop Function · 3.2 x 2.5 mm

- reflow soldering temperature: 260 °C max.
- compact & flat ceramic/metal package



General Data

type	JO32 2.8 V
frequency range	0.75 ~ 80.0 MHz (15 pF max.)
	0.75 ~ 50.0 MHz (30 pF max.)
higher frequencies	80.0 ~ 135.0 MHz (15 pF max.)*
frequency stability over all**	± 20 ppm ~ ± 100 ppm (table 1)
current consumption	see table 2
supply voltage V _{DC}	2.8 V ± 5%
temperature	operating -10 °C ~ +70 °C / -40 °C ~ +85 °C / -40 °C ~ +105 °C
	storage -55 °C ~ +125 °C
output	rise & fall time see table 3
	load max. 15 pF / 30 pF (≤ +85 °C and ≤ 50.0 MHz)
	current max. 4 mA / 5 mA
	low level max. 0.4 V
	high level min. V _{DC} - 0.4 V
output enable time max.	10 ms
output disable time max.	50 µs
start-up time max.	10 ms
standby function	stop
standby current max.	5 µA
phase jitter 12 kHz ~ 20.0 MHz	< 1.0 ps RMS
symmetry at 0.5 x V _{DC}	45% ~ 55% (40% ~ 60% max.)

* ask if available

Table 1: Frequency Stability Code

stability code / temp. code**	A	B	G	C	D
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm
-20 °C ~ +70 °C		○	○	○	△
-40 °C ~ +85 °C T1	○	○	○		
-40 °C ~ +105 °C T2	○	○			

○ available △ excludes aging

** includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


Current at 15 pF load		Current at 30 pF load	
0.75 ~ 19.9 MHz	4 mA	0.75 ~ 19.9 MHz	6 mA
20.00 ~ 39.9 MHz	7 mA	20.00 ~ 39.9 MHz	13 mA
40.00 ~ 59.9 MHz	16 mA	40.00 ~ 50.0 MHz	18 mA
60.00 ~ 79.9 MHz	18 mA		
80.00 ~ 135.0 MHz*	40 mA		

Table 3: Rise & Fall Time max.

at 15 pF	at 30 pF
5 ns: 0.75 ~ 49.99 MHz	8 ns: 0.75 ~ 49.99 MHz
5 ns: 50.00 ~ 79.99 MHz	
4 ns: 80.00 ~ 135.00 MHz*	

note: rise time: 0.1 V_{DC} ~ 0.9 V_{DC} / fall time: 0.9 V_{DC} ~ 0.1 V_{DC}
specific data on request

Dimensions

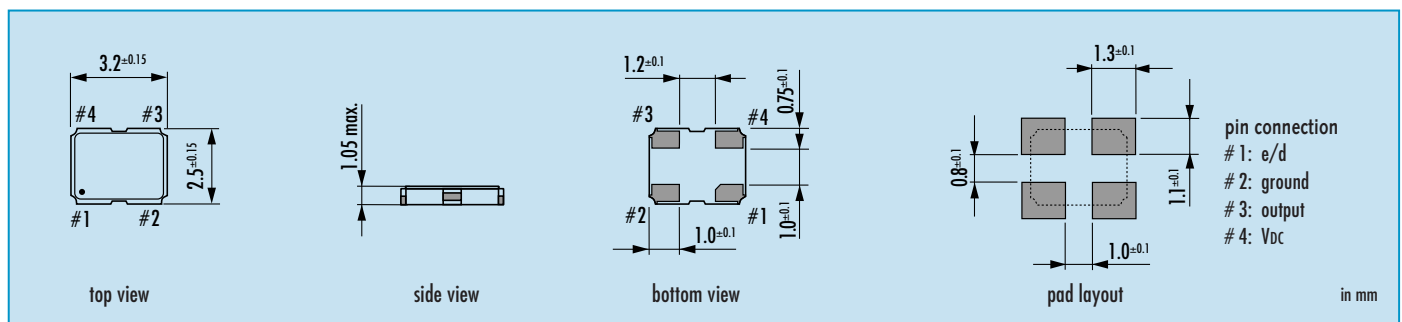

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	0.75 ~ 80.0 MHz	JO32	see table 1	2.8 = 2.8 V	1 = 15 pF 2 = 30 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C

Example: O 20.0-JO32-B-2.8-1-T1-LF (LF = RoHS compliant / Pb free pins or pads)



Oscillator · JO32 · 2.8 V · Stop Function

Taping Specification

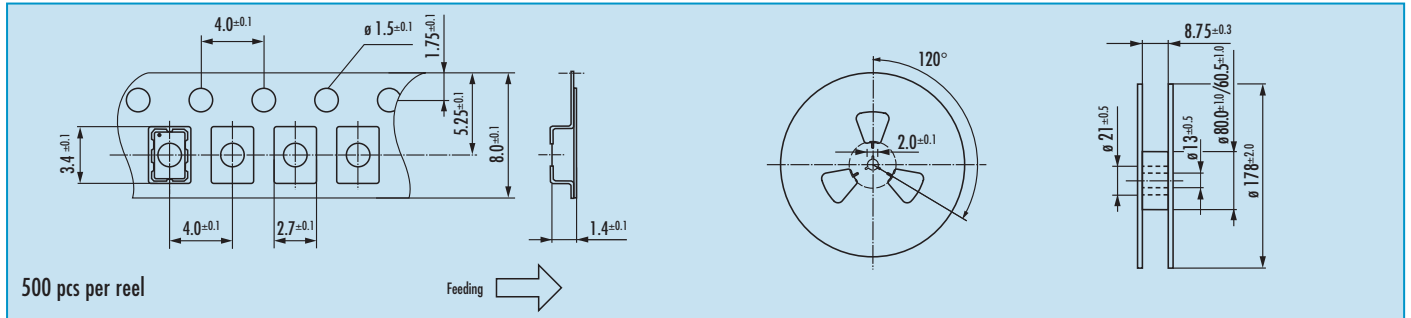

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
stop function:	
<ul style="list-style-type: none"> • oscillator stops • output high impedance 	

Marking

frequency
company code / frequency stability code / date code

date code:

A ~ M: Jan. - Dec.


1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

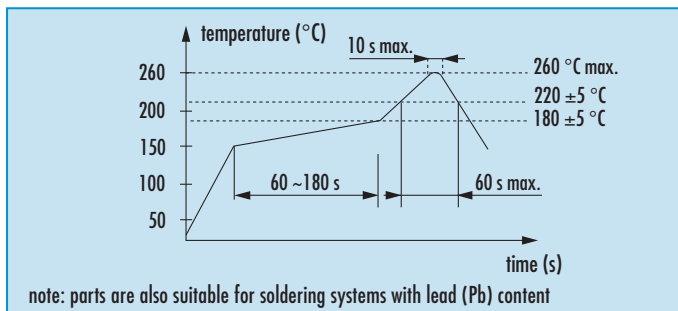

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO32 · 2.5 V

SMD Oscillator with Stop Function · 3.2 x 2.5 mm

- reflow soldering temperature: 260 °C max.
- compact & flat ceramic/metal package



General Data

type	JO32 2.5 V
frequency range	0.75 ~ 80.0 MHz (15 pF max.)
	0.75 ~ 50.0 MHz (30 pF max.)
higher frequencies	80.0 ~ 135.0 MHz (15 pF max.)*
frequency stability over all**	± 20 ppm ~ ± 100 ppm (table 1)
current consumption	see table 2
supply voltage V _{DC}	2.5 V ± 5%
temperature	operating -10 °C ~ +70 °C / -40 °C ~ +85 °C / -40 °C ~ +105 °C
	storage -55 °C ~ +125 °C
output	rise & fall time see table 3
	load max. 15 pF / 30 pF (≤ +85 °C and ≤ 50.0 MHz)
	current max. 4 mA / 5 mA
	low level max. 0.4 V
	high level min. V _{DC} - 0.4 V
output enable time max.	10 ms
output disable time max.	50 µs
start-up time max.	10 ms
standby function	stop
standby current max.	5 µA
phase jitter 12 kHz ~ 20.0 MHz	< 1.0 ps RMS
symmetry at 0.5 x V _{DC}	45% ~ 55% (40% ~ 60% max.)

* ask if available

Table 1: Frequency Stability Code

stability code / temp. code**	A ± 100 ppm	B ± 50 ppm	G ± 30 ppm	C ± 25 ppm	D ± 20 ppm
-20 °C ~ +70 °C		○	○	○	△
-40 °C ~ +85 °C T1	○	○	○		
-40 °C ~ +105 °C T2	○	○			

○ available △ excludes aging

** includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


Current at 15 pF load		Current at 30 pF load	
0.75 ~ 19.9 MHz	4 mA	0.75 ~ 19.9 MHz	6 mA
20.00 ~ 39.9 MHz	7 mA	20.00 ~ 39.9 MHz	11 mA
40.00 ~ 59.9 MHz	11 mA	40.00 ~ 50.0 MHz	14 mA
60.00 ~ 79.9 MHz	14 mA		
80.00 ~ 135.0 MHz*	35 mA		

Table 3: Rise & Fall Time max.

at 15 pF	at 30 pF
5 ns: 0.75 ~ 49.99 MHz	8 ns: 0.75 ~ 49.99 MHz
5 ns: 50.00 ~ 79.99 MHz	
4 ns: 80.00 ~ 135.00 MHz*	

note: rise time: 0.1 V_{DC} ~ 0.9 V_{DC} / fall time: 0.9 V_{DC} ~ 0.1 V_{DC}
specific data on request

Dimensions

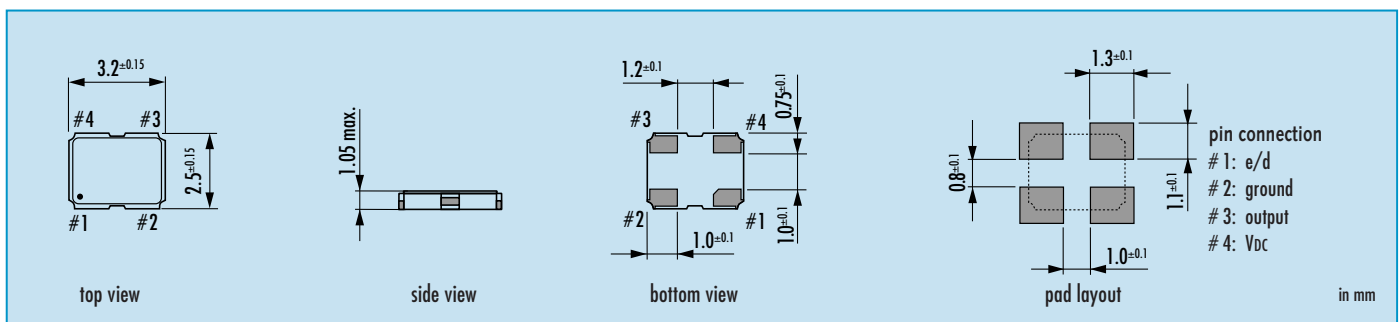

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	0.75 ~ 80.0 MHz	JO32	see table 1	2.5 = 2.5 V	1 = 15 pF 2 = 30 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C

Example: O 20.0-JO32-B-2.5-1-T1-LF (LF = RoHS compliant / Pb free pins or pads)



Oscillator · JO32 · 2.5 V · Stop Function

Taping Specification

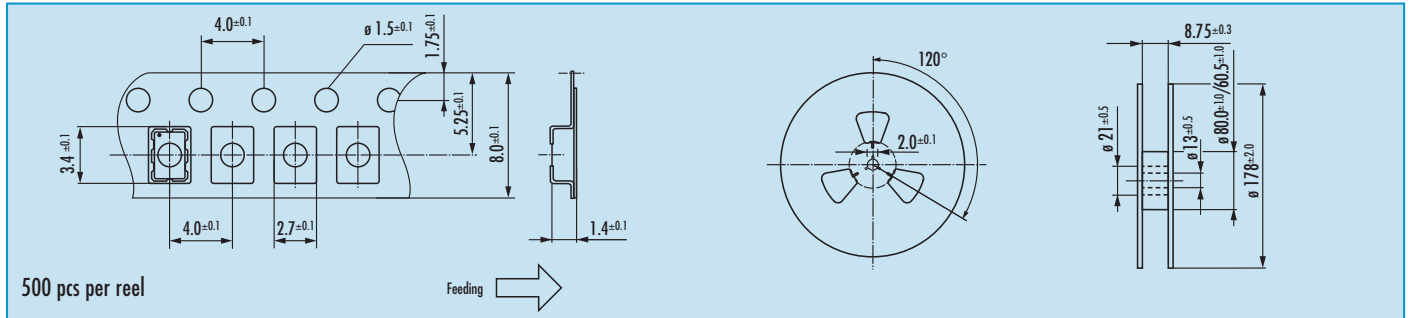

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
stop function:	
<ul style="list-style-type: none"> oscillator stops output high impedance 	

Marking

frequency
company code / frequency stability code / date code

date code:

A ~ M: Jan. - Dec.


1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

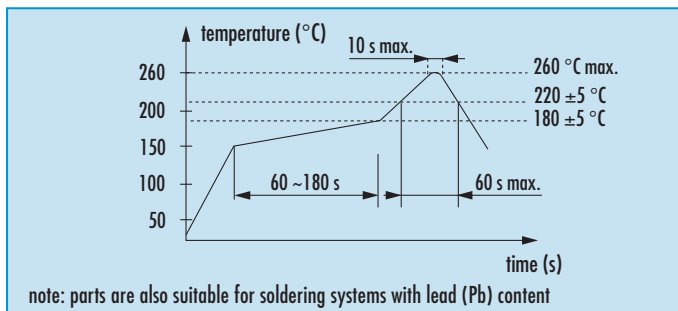

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk



Oscillator · JO32H · 2.5 V



actual size

High Stability Oscillator with Stop Function · 3.2 x 2.5 mm

- low cost high stability SMD oscillator
- stability meets spec for WiMax and WLAN
- RoHS compliant, ceramic/metal package
- reflow soldering temperature: 260 °C max.



General Data

type	JO32H 2.5V	
frequency range	2.50 ~ 60.0 MHz (15 pF max.)	
frequency stability over all*	± 8 ppm ~ ± 20 ppm (table 1)	
aging 1st year	+/-2 ppm max.	
current consumption	7 mA max.	
supply voltage V _{DC}	2.5 V ± 10%	
temperature	operating	-20 °C ~ +70 °C up to -40 °C ~ +105 °C
	storage	-40 °C ~ +85 °C
output	rise & fall time	5 nsec max.
	load max.	15 pF
	current max.	4 mA
	low level max.	0.1 x V _{DC}
	high level min.	0.9 x V _{DC}
output enable time max.	1 ms	
output disable time max.	250 ns	
start-up time max.	2 ms	
standby function	stop	
standby current max.	5 µA	
jitter	< 3.0 ps RMS typ.	
symmetry at 0.5 x V _{DC}	45% ~ 55% max.	

Table 1: Frequency Stability Code

stability code	D	E	F	H
	± 20 ppm	± 15 ppm	± 10 ppm	± 8 ppm
-20 °C ~ +70 °C	○	○	○	○
-40 °C ~ +85 °C	○	○	○	
-40 °C ~ +105 °C	○			

○ available

* includes stability at 25°C, operating temp. range, supply voltage change, load change, vibration, aging 1st year

Table 2: Rise & Fall Time max.


5 ns: 2.5 ~ 60.0 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
----------------------	--

Enable / Disable Function

pin #1 (e/d control)	pin #4 (output)
open	active
high "1" (V _{IH} ≥ 0.7 V _{DC})	active
low "0" (V _{IL} ≤ 0.3 V _{DC})	high impedance

stop function: • oscillator stops / • output high impedance

Dimensions

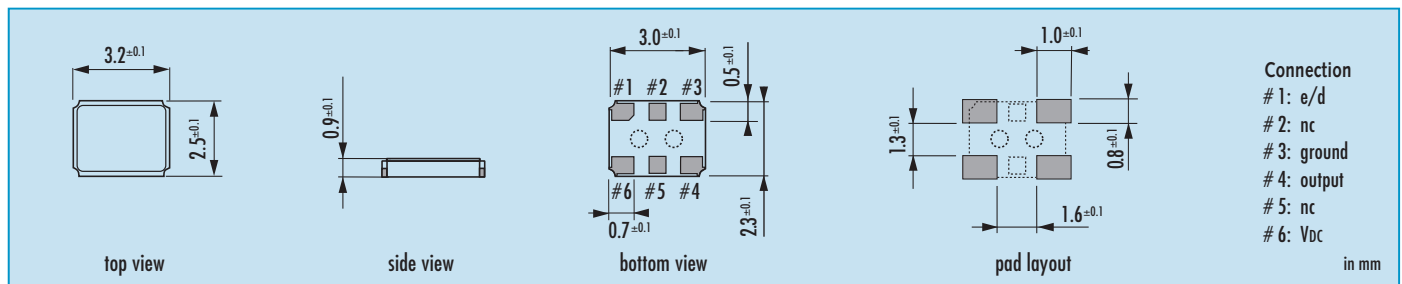

Note: please leave pins # 2, # 5 and the area underneath the package unconnected

Order Information

0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	2.50 ~ 60.0 MHz	JO32H	see table 1	2.5 = 2.5 V	1 = 15 pF	blank = -20°C ~ +70°C T1 = -40°C ~ +85°C T2 = -40°C ~ +105°C

Example: O 20.0-JO32H-F-2.5-1-T1-LF (LF = RoHS compliant / Pb free pins or pads)




B.C.E. s.r.l.
 Via Regina Pacis, 54/c - 41049 SASSUOLO (MO) Italy
 Tel. +39 0536 811.616 r.a. - Fax +39 0536 811.500
 www.bce.it - E-mail: bce@bce.it




Oscillator · JO32H · 2.5 V · Low Power

Taping Specification

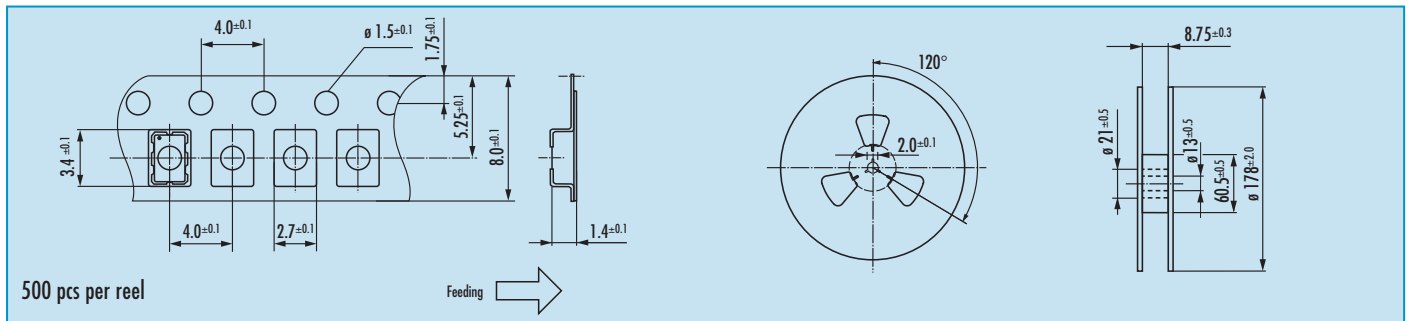

Reflow Soldering Profile

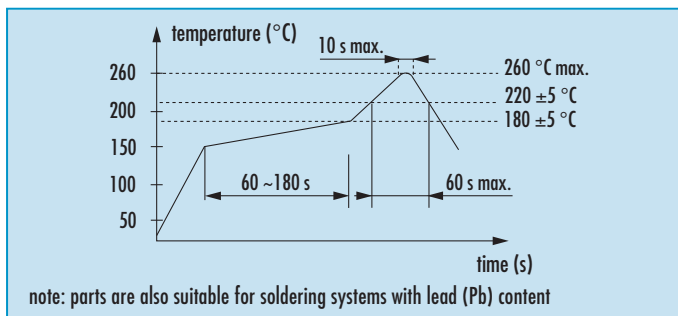

Marking

frequency
company code / frequ. stability code / date code

date code:

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

A ~ M: Jan. - Dec.
0: 2010 3: 2013
1: 2011 4: 2014
2: 2012 5: 2015

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO32 · 1.8 V

SMD Oscillator with Stop Function · 3.2 x 2.5 mm



- reflow soldering temperature: 260 °C max.
- compact & flat ceramic/metal package

General Data

type	JO32 1.8 V
frequency range	0.75 ~ 40.0 MHz (15 pF max.)
	0.75 ~ 40.0 MHz (30 pF max.)
higher frequencies	40.0 ~ 80.0 MHz (15 pF max.)*
frequency stability over all**	± 20 ppm ~ ± 100 ppm (table 1)
current consumption	see table 2
supply voltage V _{DC}	1.8 V ± 5%
temperature	operating -10 °C ~ +70 °C / -40 °C ~ +85 °C / -40 °C ~ +105 °C
	storage -55 °C ~ +125 °C
output	rise & fall time see table 3
	load max. 15 pF / 30 pF (≤ +85 °C and ≤ 50.0 MHz)
	current max. 4 mA
	low level max. 0.4 V
	high level min. V _{DC} - 0.4 V
output enable time max.	10 ms
output disable time max.	50 µs
start-up time max.	10 ms
standby function	stop
standby current max.	5 µA
phase jitter 12 kHz ~ 20.0 MHz	< 1.0 ps RMS
symmetry at 0.5 x V _{DC}	45% ~ 55% (40% ~ 60% max.)

* ask if available

Table 1: Frequency Stability Code

stability code / temp. code**	A	B	G	C	D
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm
-20 °C ~ +70 °C		○	○	○	△
-40 °C ~ +85 °C T1	○	○	○		
-40 °C ~ +105 °C T2	○	○			

○ available △ excludes aging

** includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


Current at 15 pF load		Current at 30 pF load	
0.75 ~ 29.9 MHz	2 mA	0.75 ~ 29.9 MHz	6 mA
30.00 ~ 39.9 MHz	3 mA	30.00 ~ 40.0 MHz	11 mA
40.00 ~ 80.0 MHz*	11 mA		

Table 3: Rise & Fall Time max.

at 15 pF	at 30 pF
7 ns: 0.75 ~ 39.99 MHz	10 ns: 0.75 ~ 40.00 MHz
5 ns: 40.00 ~ 80.00 MHz*	

note: rise time: 0.1 V_{DC} ~ 0.9 V_{DC} / fall time: 0.9 V_{DC} ~ 0.1 V_{DC}
specific data on request

Dimensions

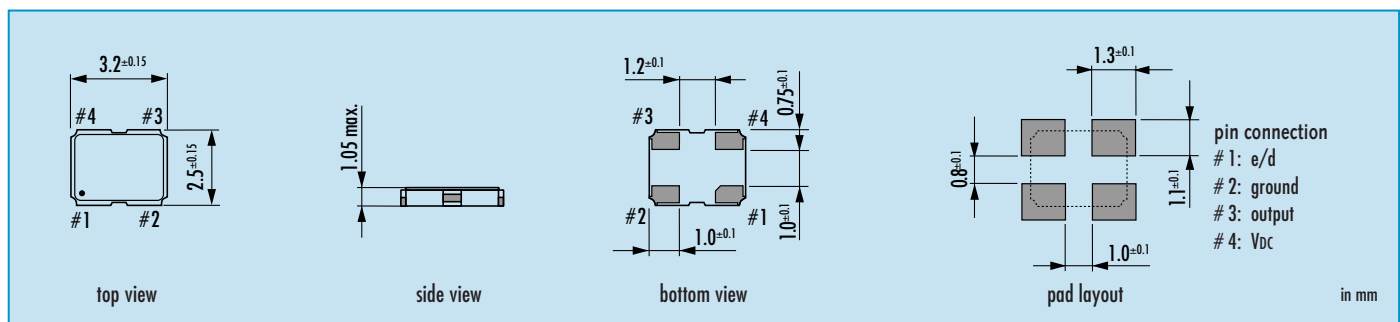

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	0.75 ~ 40.0 MHz	JO32	see table 1	1.8 = 1.8 V	1 = 15 pF 2 = 30 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C

Example: O 20.0-JO32-B-1.8-1-T1-LF (LF = RoHS compliant / Pb free pins or pads)



Oscillator · JO32 · 1.8 V · Stop Function

Taping Specification

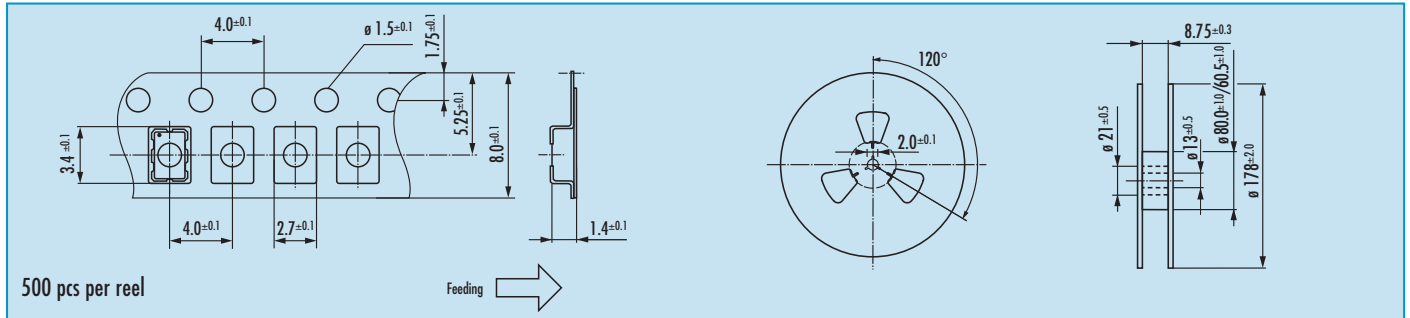

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance

stop function:

- oscillator stops
- output high impedance

Marking

frequency
company code / frequency stability code / date code

date code:

A ~ M: Jan. - Dec.


1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

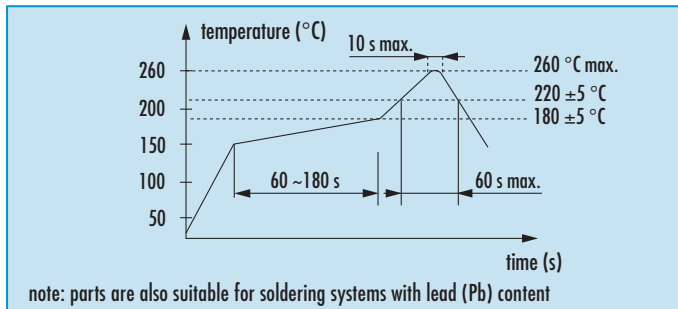

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk



Oscillator · JO32H · 1.8 V



actual size

High Stability Oscillator with Stop Function · 3.2 x 2.5 mm

- low cost high stability SMD oscillator
- stability meets spec for WiMax and WLAN
- RoHS compliant, ceramic/metal package
- reflow soldering temperature: 260 °C max.



General Data

type	JO32H 1.8V	
frequency range	2.50 ~ 60.0 MHz (15 pF max.)	
frequency stability over all*	± 8 ppm ~ ± 20 ppm (table 1)	
aging 1st year	+/-2 ppm max.	
current consumption	5 mA max.	
supply voltage V _{DC}	1.8 V ± 10%	
temperature	operating	-20 °C ~ +70 °C up to -40 °C ~ +105 °C
	storage	-40 °C ~ +85 °C
output	rise & fall time	5 nsec max.
	load max.	15 pF
	current max.	4 mA
	low level max.	0.1 x V _{DC}
	high level min.	0.9 x V _{DC}
output enable time max.	1 ms	
output disable time max.	250 ns	
start-up time max.	2 ms	
standby function	stop	
standby current max.	5 µA	
jitter	< 3.0 ps RMS typ.	
symmetry at 0.5 x V _{DC}	45% ~ 55% max.	

Table 1: Frequency Stability Code

stability code	D	E	F	H
	± 20 ppm	± 15 ppm	± 10 ppm	± 8 ppm
-20 °C ~ +70 °C	○	○	○	○
-40 °C ~ +85 °C	○	○	○	
-40 °C ~ +105 °C	○			

○ available

* includes stability at 25°C, operating temp. range, supply voltage change, load change, vibration, aging 1st year

Table 2: Rise & Fall Time max.


5 ns: 2.5 ~ 60.0 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
----------------------	---

Enable / Disable Function

pin #1 (e/d control)	pin #4 (output)
open	active
high "1" (V _{IH} ≥ 0.7 V _{DC})	active
low "0" (V _{IL} ≤ 0.3 V _{DC})	high impedance


stop function: • oscillator stops / • output high impedance

Dimensions

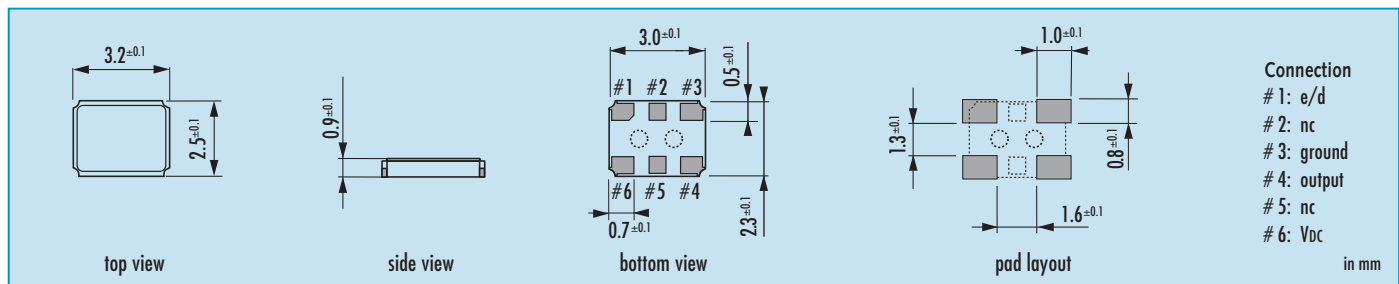

Note: please leave pins # 2, # 5 and the area underneath the package unconnected

Order Information

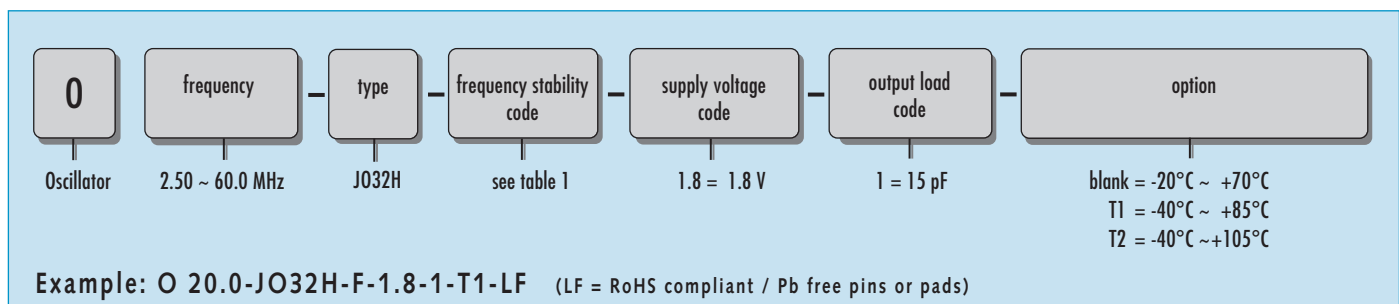


B.C.E. s.r.l.
Via Regina Pacis, 54/c - 41049 SASSUOLO (MO) Italy
Tel. +39 0536 811.616 r.a. - Fax +39 0536 811.500
www.bce.it - E-mail: bce@bce.it




Oscillator · JO32H · 1.8 V · Low Power

Taping Specification

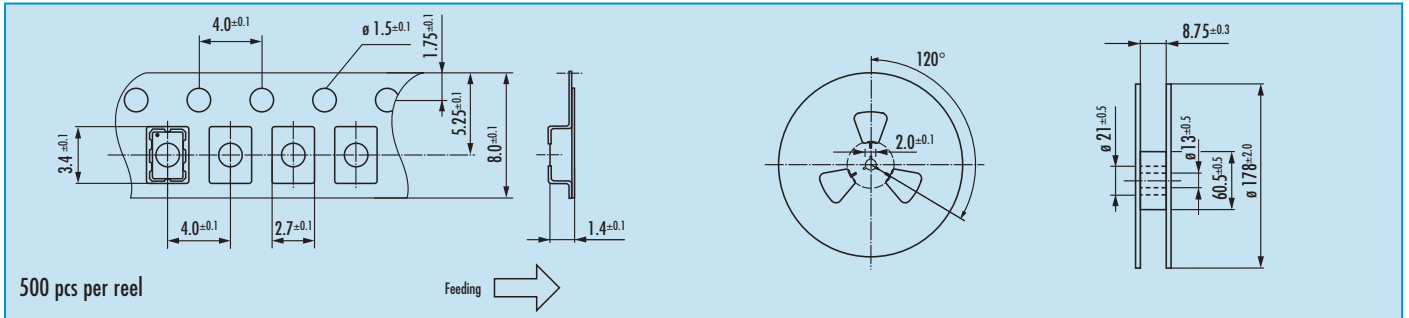

Reflow Soldering Profile

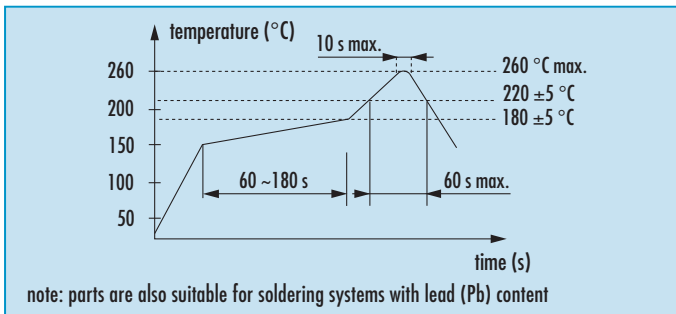

Marking

frequency
company code / frequ. stability code / date code

date code:

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

A ~ M: Jan. - Dec.
0: 2010 3: 2013
1: 2011 4: 2014
2: 2012 5: 2015

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO22 · 3.3 V

SMD Oscillator with Stop Function · 2.5 x 2.0 mm

- low current consumption
- low phase noise type for WLAN available**
- reflow soldering temperature: 260 °C max.
- ultra flat ceramic / metal package



General Data

type	JO22 3.3 V
frequency range	0.75 ~ 50.0 MHz
frequency stability over all*	± 25 ppm ~ ± 100 ppm see table 1
current consumption	see table 2
supply voltage V _{DC}	3.3 V ± 5%
temperature	operating -20 °C ~ +70 °C up to -40 °C ~ +105 °C
	storage -55 °C ~ +105 °C
output	rise & fall time see table 3
	load max 15 pF
	current max. 4 mA
	low level max. 0.4 V
	high level min. V _{DC} - 0.4 V
output enable time max.	10 ms
output disable time max.	50 µs
start-up time max.	10 ms
standby function	stop
standby current max.	10 µA
phase jitter 12 kHz ~ 20.0 MHz	< 1.0 ps RMS**
symmetry at 0.5 x V _{DC}	45 % ~ 55 % max.

Table 1: Frequency Stability Code

stability code	A ± 100 ppm	B ± 50 ppm	G ± 30 ppm	C ± 25 ppm		
-20 °C ~ +70 °C		○	○	△		
-40 °C ~ +85 °C	○	○	○			
-40 °C ~ +105 °C	○	○				

● standard ○ available △ excludes aging

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


3.3 V: current at 15pF load:	
0.75 ~ 19.9 MHz	6 mA
20.00 ~ 39.9 MHz	7 mA
40.00 ~ 50.0 MHz	8 mA

Table 3: Rise & Fall Time max.

5 ns: 0.75 ~ 50.0 MHz	<p>note:</p> <ul style="list-style-type: none"> - specific data on request - rise time: 0.1 V_{DC} ~ 0.9 V_{DC} - fall time: 0.9 V_{DC} ~ 0.1 V_{DC}
-----------------------	--

** detailed data and available frequencies for option - LP upon request

Dimensions

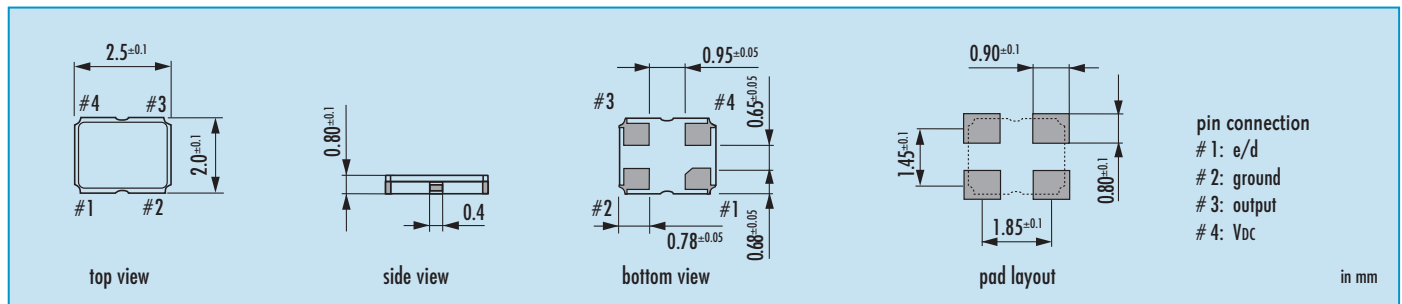

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	0.75 ~ 50.0 MHz	JO22	see table 1	3.3 = 3.3 V	1 = 15 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C LP = low phase noise**

Example: O 20.0-JO22-B-3.3-1-LF (LF = RoHS compliant / Pb free pins or pads)



Oscillator · JO22 · 3.3 V · Stop Function

Taping Specification

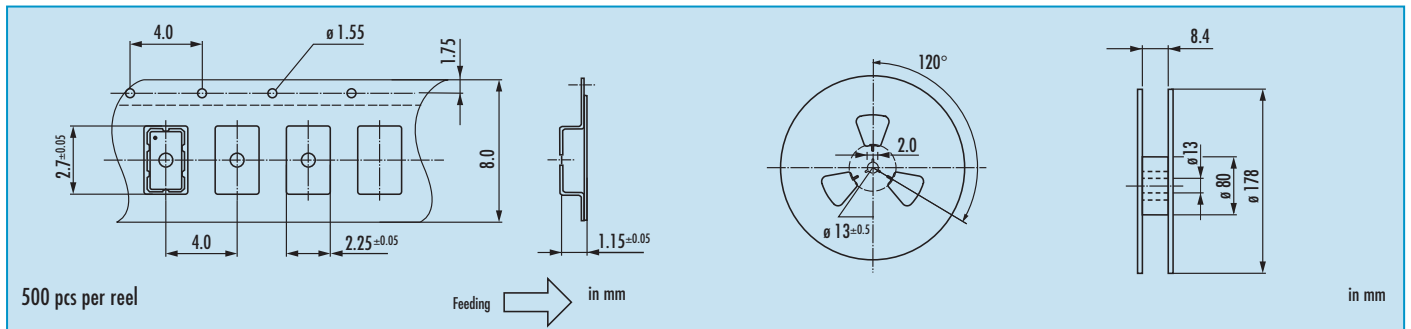

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
stop function:	
<ul style="list-style-type: none"> • oscillator stops • output high impedance 	

Marking

frequency
company code / frequency stability code / date code

date code:

A ~ M: Jan. - Dec.


0: 2010 3: 2013

1: 2011 4: 2014

2: 2012 5: 2015

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

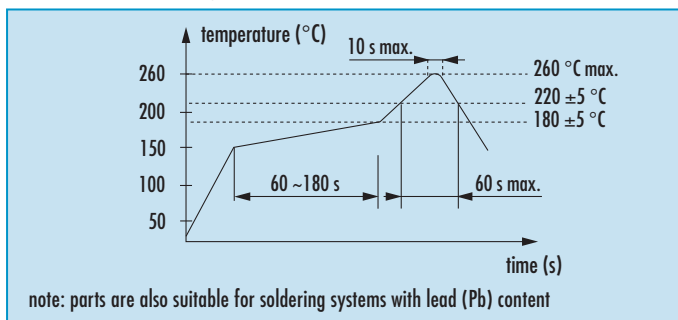

* hand soldering temperature should not exceed 280 °C

Packing Note

- standard packing units are 1000 pieces per reel
- non-multiple packing units are only supplied taped / bulk



Oscillator · JO22H · 3.3 V



actual size

High Stability Oscillator with Stop Function · 2.5 x 2.0 mm

- low cost high stability SMD oscillator
- stability meets spec for WiMax and WLAN
- RoHS compliant, ceramic/metal package
- reflow soldering temperature: 260 °C max.



General Data

type		JO22H 3.3V
frequency range		4.0 ~ 54.0 MHz (15pF max.)
frequency stability over all*		± 10ppm ~ ± 20ppm (table 1)
current consumption		7 mA max.
supply voltage V _{DC}		3.3 V ±5%
temperature	operating	-20°C ~ +70°C / -40°C ~ +85°C
	storage	-40°C ~ +85°C
output	rise & fall time	5 nsec max.
	load max.	15pF
	current max.	4 mA
	low level max.	0.1 x V _{DC}
	high level min.	0.9 x V _{DC}
output enable time max.		10 ms
output disable time max.		250ns
start-up time max.		10 ms
standby function		stop
standby current max.		10 µA
jitter		< 3.0 ps RMS typ.
symmetry at 0.5 x V _{DC}		45% ~ 55% max.

Table 1: Frequency Stability Code

stability code	D	E	F		
	± 20 ppm	± 15 ppm	± 10 ppm		
-20 °C ~ +70 °C	○	○	○		
-40 °C ~ +85 °C	○	○	○		
○ available					

* includes stability at 25°C, operating temp. range, supply voltage change, load change, vibration, aging 1st year


Table 2: Rise & Fall Time max.

5 ns: 4.0 ~ 54.0 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
----------------------	---

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" (V _{IH} ≥ 0.7 V _{DC})	active
low "0" (V _{IL} ≤ 0.3 V _{DC})	high impedance
stop function: • oscillator stops / • output high impedance	

Dimensions

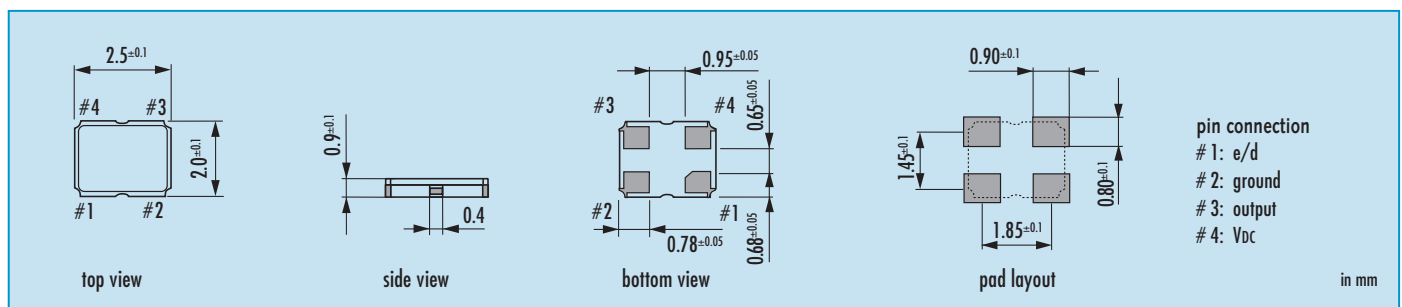


Order Information

0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	4.0 ~ 54.0 MHz	JO22H	see table 1	3.3 = 3.3 V	1 = 15 pF	blank = -20°C ~ +70°C T1 = -40°C ~ +85°C
Example: O 20.0-JO22H-F-3.3-1-T1 (LF = RoHS compliant / Pb free pins or pads)						




Oscillator · JO22H · 3.3 V · Low Power

Taping Specification

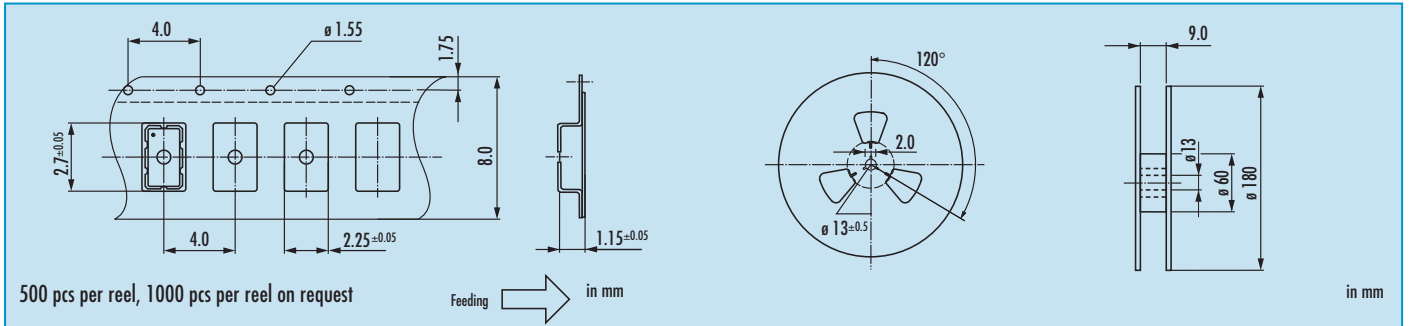

Reflow Soldering Profile

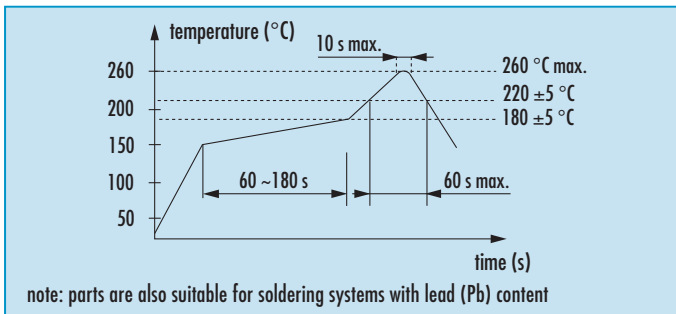

Marking

frequency
company code / stability code / date code

date code:

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

A ~ M: Jan. - Dec.
0: 2010 3: 2013
1: 2011 4: 2014
2: 2012 5: 2015

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO22 · 3.0 V

SMD Oscillator with Stop Function · 2.5 x 2.0 mm

- low current consumption
- low phase noise type for WLAN available**
- reflow soldering temperature: 260 °C max.
- ultra flat ceramic / metal package



General Data

type	JO22 3.0 V
frequency range	0.75 ~ 50.0 MHz
frequency stability over all*	± 25 ppm ~ ± 100 ppm see table 1
current consumption	see table 2
supply voltage V _{DC}	3.0 V ± 5%
temperature	operating -20 °C ~ +70 °C up to -40 °C ~ +105 °C
	storage -55 °C ~ +105 °C
output	rise & fall time see table 3
	load max 15 pF
	current max. 4 mA
	low level max. 0.4 V
	high level min. V _{DC} - 0.4 V
output enable time max.	10 ms
output disable time max.	50 µs
start-up time max.	10 ms
standby function	stop
standby current max.	10 µA
phase jitter 12 kHz ~ 20.0 MHz	< 1.0 ps RMS**
symmetry at 0.5 x V _{DC}	45 % ~ 55 % max.

Table 1: Frequency Stability Code

stability code	A	B	G	C		
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm		
-20 °C ~ +70 °C		○	○	△		
-40 °C ~ +85 °C	○	○	○			
-40 °C ~ +105 °C	○	○				

● standard ○ available △ excludes aging

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


3.0 V: current at 15pF load:	
0.75 ~ 19.9 MHz	5.5 mA
20.00 ~ 39.9 MHz	6.5 mA
40.00 ~ 50.0 MHz	7.5 mA

Table 3: Rise & Fall Time max.

5 ns: 0.75 ~ 50.0 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
-----------------------	--

** detailed data and available frequencies for option - LP upon request

Dimensions

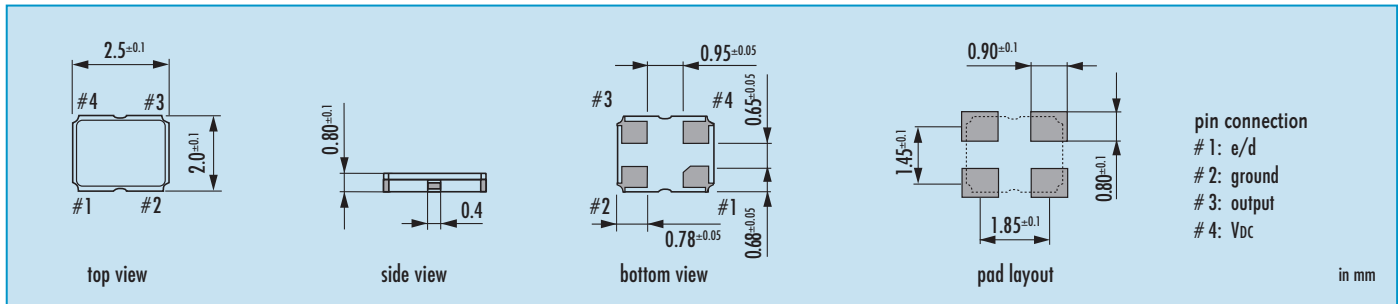

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	0.75 ~ 50.0 MHz	JO22	see table 1	3.0 = 3.0 V	1 = 15 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C LP = low phase noise**

Example: O 20.0-JO22-B-3.0-1-LF (LF = RoHS compliant / Pb free pins or pads)



Oscillator · JO22 · 3.0 V · Stop Function

Taping Specification

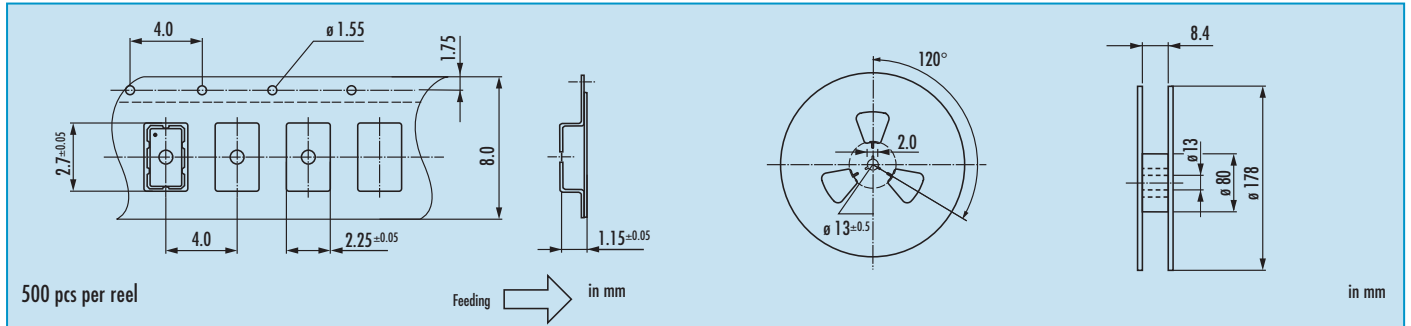

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
stop function:	
<ul style="list-style-type: none"> • oscillator stops • output high impedance 	

Marking

frequency
company code / frequency stability code / date code

date code:

A ~ M: Jan. - Dec.


0: 2010 3: 2013

1: 2011 4: 2014

2: 2012 5: 2015

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

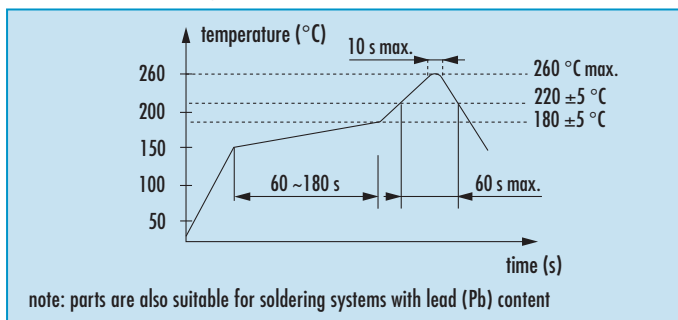

* hand soldering temperature should not exceed 280 °C

Packing Note

- standard packing units are 1000 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO22 · 2.8 V

SMD Oscillator with Stop Function · 2.5 x 2.0 mm

- low current consumption
- low phase noise type for WLAN available**
- reflow soldering temperature: 260 °C max.
- ultra flat ceramic / metal package



General Data

type	JO22 2.8 V
frequency range	0.75 ~ 50.0 MHz
frequency stability over all*	± 25 ppm ~ ± 100 ppm see table 1
current consumption	see table 2
supply voltage V _{DC}	2.8 V ± 5%
temperature	operating -20 °C ~ +70 °C up to -40 °C ~ +105 °C
	storage -55 °C ~ +105 °C
output	rise & fall time see table 3
	load max 15 pF
	current max. 4 mA
	low level max. 0.4 V
	high level min. V _{DC} - 0.4 V
output enable time max.	10 ms
output disable time max.	50 µs
start-up time max.	10 ms
standby function	stop
standby current max.	10 µA
phase jitter 12 kHz ~ 20.0 MHz	< 1.0 ps RMS**
symmetry at 0.5 x V _{DC}	45 % ~ 55 % max.

Table 1: Frequency Stability Code

stability code	A ± 100 ppm	B ± 50 ppm	G ± 30 ppm	C ± 25 ppm		
-20 °C ~ +70 °C		○	○	△		
-40 °C ~ +85 °C	○	○	○			
-40 °C ~ +105 °C	○	○				

● standard ○ available △ excludes aging

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.

2.8 V: current at 15pF load:	
0.75 ~ 19.9 MHz	5 mA
20.00 ~ 39.9 MHz	6 mA
40.00 ~ 50.0 MHz	7 mA

Table 3: Rise & Fall Time max.

5 ns: 0.75 ~ 50.0 MHz	<p>note:</p> <ul style="list-style-type: none"> - specific data on request - rise time: 0.1 V_{DC} ~ 0.9 V_{DC} - fall time: 0.9 V_{DC} ~ 0.1 V_{DC}
-----------------------	---

** detailed data and available frequencies for option - LP upon request

Dimensions

pin connection
 # 1: e/d
 # 2: ground
 # 3: output
 # 4: V_{DC}

in mm

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	0.75 ~ 50.0 MHz	JO22	see table 1	2.8 = 2.8 V	1 = 15 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C LP = low phase noise**

Example: O 20.0-JO22-B-2.8-1-LF (LF = RoHS compliant / Pb free pins or pads)



Oscillator · JO22 · 2.8 V · Stop Function

Taping Specification

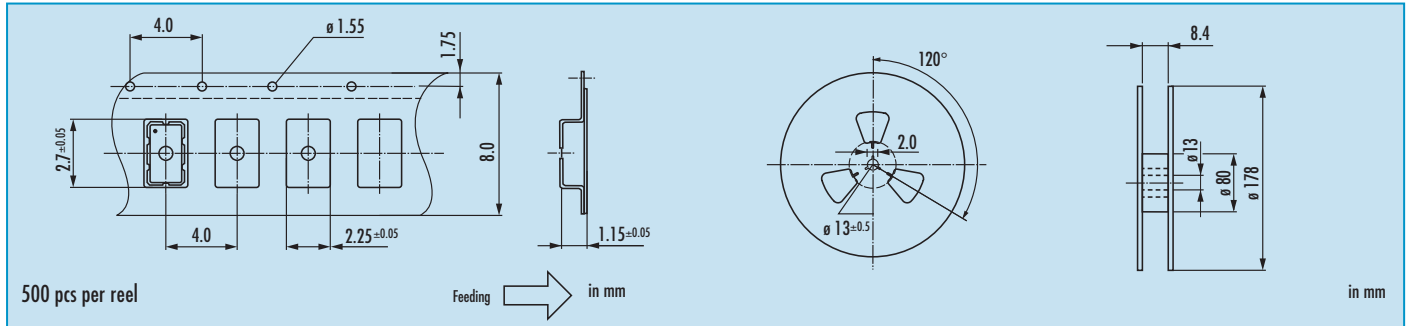

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
stop function:	
<ul style="list-style-type: none"> • oscillator stops • output high impedance 	

Marking

frequency
company code / frequency stability code / date code

date code:

A ~ M: Jan. - Dec.


0: 2010 3: 2013

1: 2011 4: 2014

2: 2012 5: 2015

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

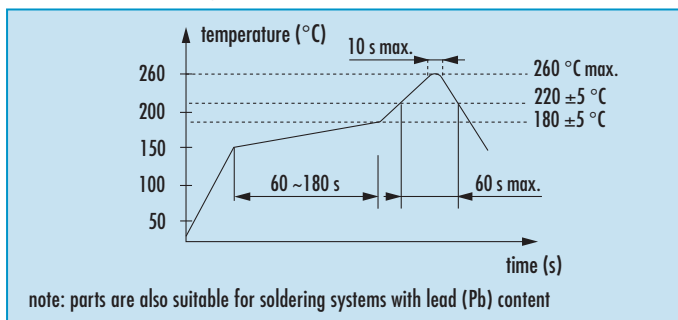

* hand soldering temperature should not exceed 280 °C

Packing Note

- standard packing units are 1000 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO22 · 2.5 V

SMD Oscillator with Stop Function · 2.5 x 2.0 mm

- low current consumption
- low phase noise type for WLAN available**
- reflow soldering temperature: 260 °C max.
- ultra flat ceramic / metal package



General Data

type	JO22 2.5 V
frequency range	0.75 ~ 50.0 MHz
frequency stability over all*	± 25 ppm ~ ± 100 ppm see table 1
current consumption	see table 2
supply voltage V _{DC}	2.5 V ± 5%
temperature	operating -20 °C ~ +70 °C up to -40 °C ~ +105 °C
	storage -55 °C ~ +105 °C
output	rise & fall time see table 3
	load max 15 pF
	current max. 4 mA
	low level max. 0.4 V
	high level min. V _{DC} - 0.4 V
output enable time max.	10 ms
output disable time max.	50 µs
start-up time max.	10 ms
standby function	stop
standby current max.	10 µA
phase jitter 12 kHz ~ 20.0 MHz	< 1.0 ps RMS**
symmetry at 0.5 x V _{DC}	45 % ~ 55 % max.

Table 1: Frequency Stability Code

stability code	A ± 100 ppm	B ± 50 ppm	G ± 30 ppm	C ± 25 ppm		
-20 °C ~ +70 °C		○	○	△		
-40 °C ~ +85 °C	○	○	○			
-40 °C ~ +105 °C	○	○				

● standard ○ available △ excludes aging

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.

2.5 V: current at 15pF load:	
0.75 ~ 19.9 MHz	5 mA
20.00 ~ 39.9 MHz	6 mA
40.00 ~ 50.0 MHz	7 mA

Table 3: Rise & Fall Time max.

5 ns: 0.75 ~ 50.0 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
-----------------------	--

** detailed data and available frequencies for option - LP upon request

Dimensions

pin connection
 # 1: e/d
 # 2: ground
 # 3: output
 # 4: V_{DC}

in mm

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	0.75 ~ 50.0 MHz	JO22	see table 1	2.5 = 2.5 V	1 = 15 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C LP = low phase noise**

Example: O 20.0-JO22-B-2.5-1-LF (LF = RoHS compliant / Pb free pins or pads)



Oscillator · JO22 · 2.5 V · Stop Function

Taping Specification

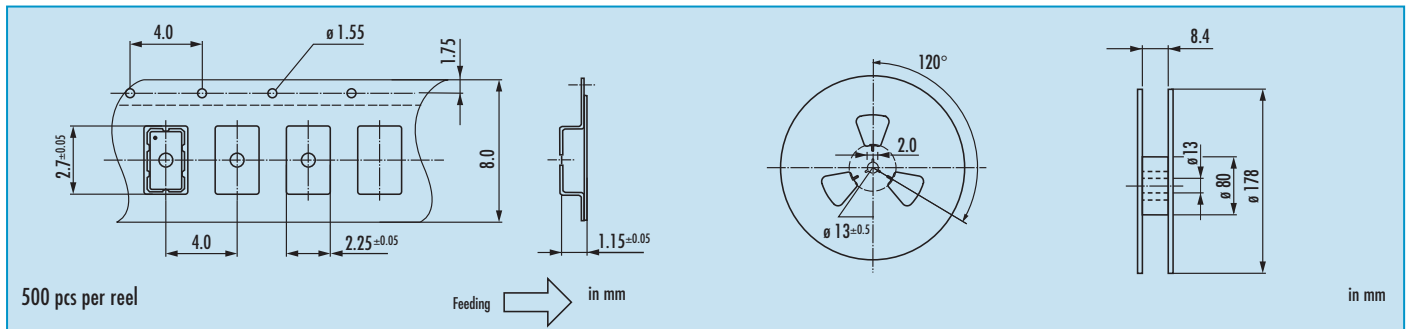

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
stop function:	
<ul style="list-style-type: none"> • oscillator stops • output high impedance 	

Marking

frequency
company code / frequency stability code / date code

date code:

A ~ M: Jan. - Dec.


0: 2010 3: 2013

1: 2011 4: 2014

2: 2012 5: 2015

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

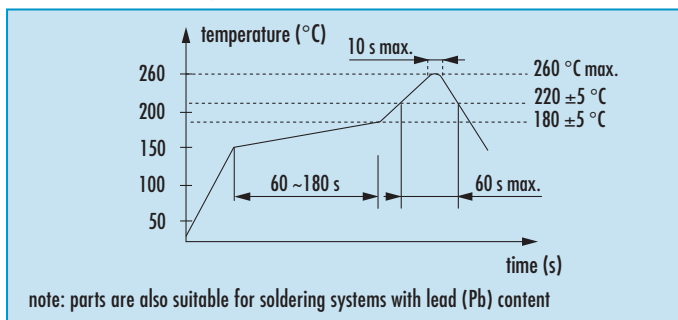

* hand soldering temperature should not exceed 280 °C

Packing Note

- standard packing units are 1000 pieces per reel
- non-multiple packing units are only supplied taped / bulk



Oscillator · JO22H · 2.5 V



actual size

High Stability Oscillator with Stop Function · 2.5 x 2.0 mm

- low cost high stability SMD oscillator
- stability meets spec for WiMax and WLAN
- RoHS compliant, ceramic/metal package
- reflow soldering temperature: 260 °C max.



General Data

type		JO22H 2.5V
frequency range		4.0 ~ 54.0 MHz (15pF max.)
frequency stability over all*		± 10ppm ~ ± 20ppm (table 1)
current consumption		6 mA max.
supply voltage V _{DC}		2.5 V ± 5%
temperature	operating	-20°C ~ +70°C / -40°C ~ +85°C
	storage	-40°C ~ +85°C
output	rise & fall time	5 nsec max.
	load max.	15pF
	current max.	4 mA
	low level max.	0.1 x V _{DC}
	high level min.	0.9 x V _{DC}
output enable time max.		10 ms
output disable time max.		250ns
start-up time max.		10 ms
standby function		stop
standby current max.		10 µA
jitter		< 3.0 ps RMS typ.
symmetry at 0.5 x V _{DC}		45% ~ 55% max.

Table 1: Frequency Stability Code

stability code	D	E	F		
	± 20 ppm	± 15 ppm	± 10 ppm		
-20 °C ~ +70 °C	○	○	○		
-40 °C ~ +85 °C	○	○	○		
○ available					

* includes stability at 25°C, operating temp. range, supply voltage change, load change, vibration, aging 1st year


Table 2: Rise & Fall Time max.

5 ns: 4.0 ~ 54.0 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
----------------------	---

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" (V _{IH} ≥ 0.7 V _{DC})	active
low "0" (V _{IL} ≤ 0.3 V _{DC})	high impedance
stop function: • oscillator stops / • output high impedance	

Dimensions

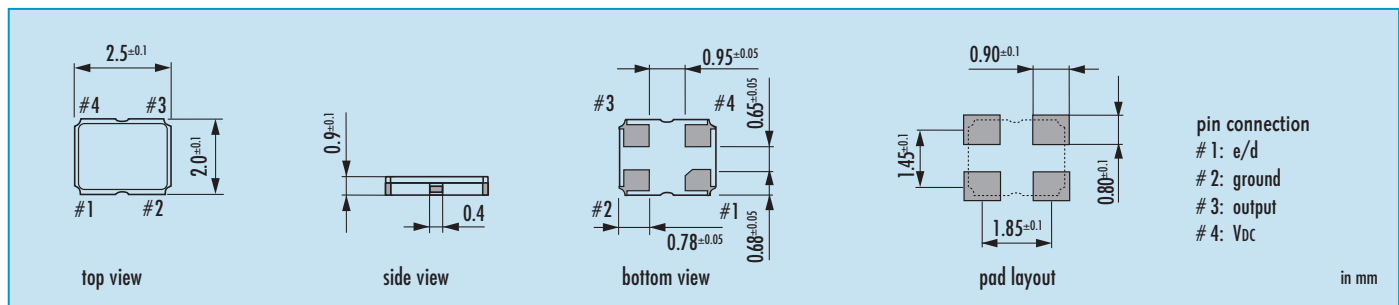

Order Information

0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	4.0 ~ 54.0 MHz	JO22H	see table 1	2.5 = 2.5 V	1 = 15 pF	blank = -20°C ~ +70°C T1 = -40°C ~ +85°C

Example: O 20.0-JO22H-F-2.5-1-T1 (LF = RoHS compliant / Pb free pins or pads)




B.C.E. s.r.l.
Via Regina Pacis, 54/c - 41049 SASSUOLO (MO) Italy
Tel. +39 0536 811.616 r.a. - Fax +39 0536 811.500
www.bce.it - E-mail: bce@bce.it




Oscillator · JO22H · 2.5 V · Low Power

Taping Specification

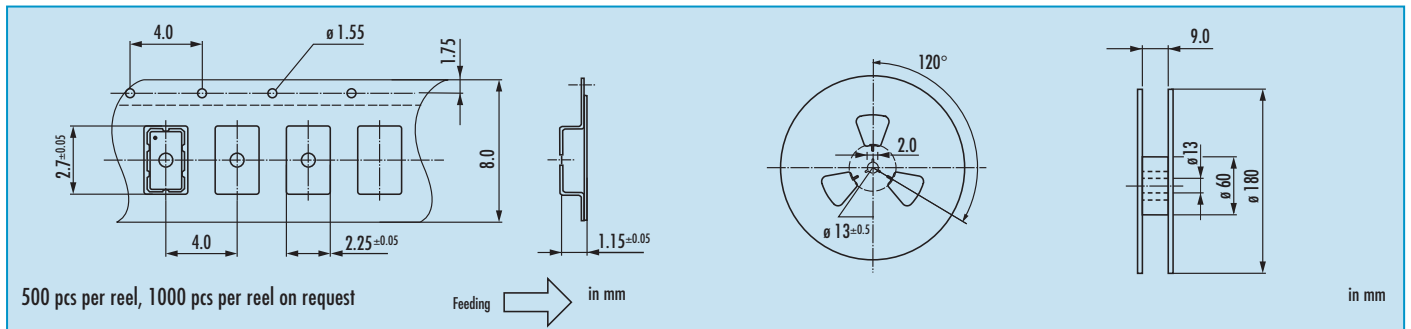

Reflow Soldering Profile

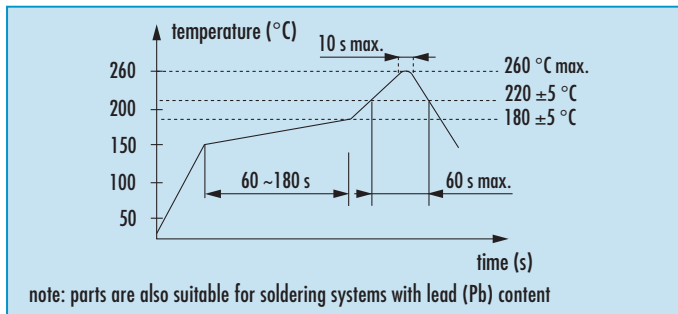

Marking

frequency
company code / stability code / date code

date code:

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

A ~ M: Jan. - Dec.
0: 2010 3: 2013
1: 2011 4: 2014
2: 2012 5: 2015

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · JO22 · 1.8 V

SMD Oscillator with Stop Function · 2.5 x 2.0 mm

- very low current consumption
- low phase noise type for WLAN available**
- reflow soldering temperature: 260 °C max.
- ultra flat ceramic / metal package



General Data

type	JO22 1.8 V
frequency range	0.75 ~ 50.0 MHz
frequency stability over all*	± 25 ppm ~ ± 100 ppm see table 1
current consumption	see table 2
supply voltage V _{DC}	1.8 V ± 5%
temperature	operating -20 °C ~ +70 °C up to -40 °C ~ +105 °C
	storage -55 °C ~ +105 °C
output	rise & fall time see table 3
	load max 15 pF
	current max. 4 mA
	low level max. 0.4 V
	high level min. V _{DC} - 0.4 V
output enable time max.	10 ms
output disable time max.	50 µs
start-up time max.	10 ms
standby function	stop
standby current max.	10 µA
phase jitter 12 kHz ~ 20.0 MHz	< 1.0 ps RMS**
symmetry at 0.5 x V _{DC}	45% ~ 55% typ. (40% ~ 60% max.)

Table 1: Frequency Stability Code

stability code	A ± 100 ppm	B ± 50 ppm	G ± 30 ppm	C ± 25 ppm		
-20 °C ~ +70 °C		○	○	△		
-40 °C ~ +85 °C	○	○	○			
-40 °C ~ +105 °C	○	○				

● standard ○ available △ excludes aging

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.

1.8 V: current at 15pF load:	
0.75 ~ 19.9 MHz	2 mA
20.00 ~ 39.9 MHz	3 mA
40.00 ~ 50.0 MHz	4 mA

Table 3: Rise & Fall Time max.

6 ns: 0.75 ~ 50.0 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
-----------------------	--

** detailed data and available frequencies for option - LP upon request

Dimensions

pin connection
 # 1: e/d
 # 2: ground
 # 3: output
 # 4: Vcc

in mm

Order Information


0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	0.75 ~ 50.0 MHz	JO22	see table 1	1.8 = 1.8V	1 = 15 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C LP = low phase noise**

Example: O 20.0-JO22-B-1.8-1-LF (LF = RoHS compliant / Pb free pins or pads)



Oscillator · JO22 · 1.8 V · Stop Function

Taping Specification

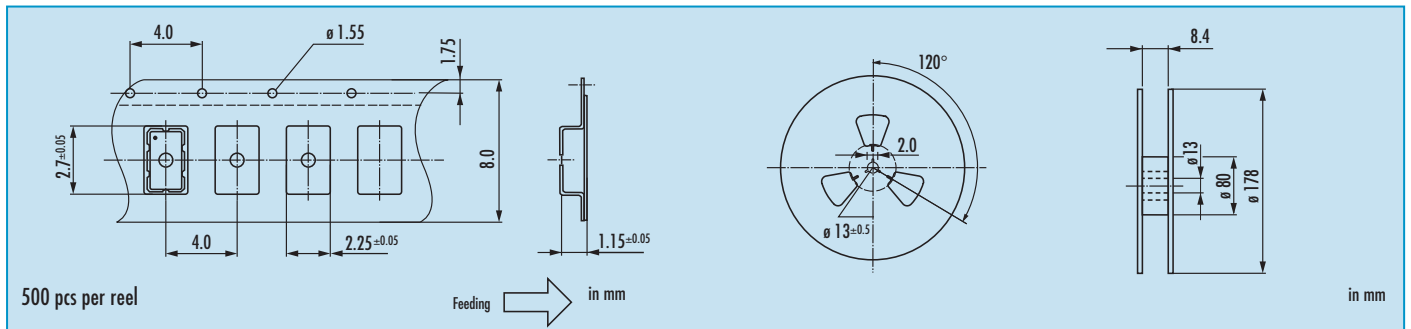

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.8 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.2 V_{DC}$)	high impedance
stop function:	
<ul style="list-style-type: none"> • oscillator stops • output high impedance 	

Marking

frequency
company code / frequency stability code / date code

date code:

A ~ M: Jan. - Dec.


0: 2010 3: 2013

1: 2011 4: 2014

2: 2012 5: 2015

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

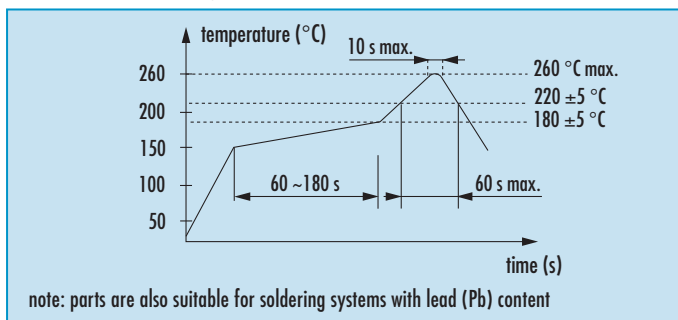

* hand soldering temperature should not exceed 280 °C

Packing Note

- standard packing units are 1000 pieces per reel
- non-multiple packing units are only supplied taped / bulk



Oscillator · JO22H · 1.8 V



actual size

High Stability Oscillator with Stop Function · 2.5 x 2.0 mm

- low cost high stability SMD oscillator
- stability meets spec for WiMax and WLAN
- RoHS compliant, ceramic/metal package
- reflow soldering temperature: 260 °C max.



General Data

type		JO22H 1.8V
frequency range		4.0 ~ 54.0 MHz (15pF max.)
frequency stability over all*		± 10ppm ~ ± 20ppm (table 1)
current consumption		3 mA max.
supply voltage V _{DC}		1.8 V ±5%
temperature	operating	-20°C ~ +70°C / -40°C ~ +85°C
	storage	-40°C ~ +85°C
output	rise & fall time	5 nsec max.
	load max.	15pF
	current max.	4 mA
	low level max.	0.1 x V _{DC}
	high level min.	0.9 x V _{DC}
output enable time max.		10 ms
output disable time max.		250ns
start-up time max.		10 ms
standby function		stop
standby current max.		10 µA
jitter		< 3.0 ps RMS typ.
symmetry at 0.5 x V _{DC}		45% ~ 55% max.

Table 1: Frequency Stability Code

stability code	D	E	F		
	± 20 ppm	± 15 ppm	± 10 ppm		
-20 °C ~ +70 °C	○	○	○		
-40 °C ~ +85 °C	○	○	▲		
○ available ▲ ask, if available					

* includes stability at 25°C, operating temp. range, supply voltage change, load change, vibration, aging 1st year


Table 2: Rise & Fall Time max.

5 ns: 4.0 ~ 54.0 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
----------------------	---

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" (V _{IH} ≥ 0.7 V _{DC})	active
low "0" (V _{IL} ≤ 0.3 V _{DC})	high impedance
stop function: • oscillator stops / • output high impedance	

Dimensions

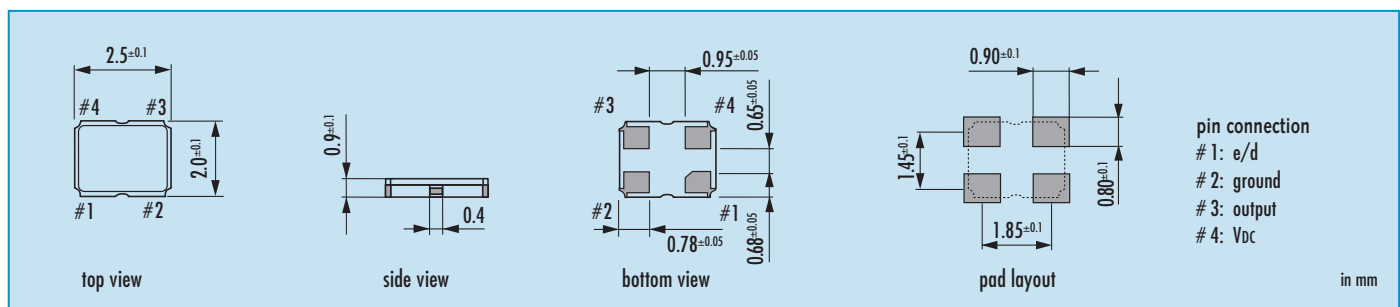

Order Information

0	frequency	type	frequency stability code	supply voltage code	output load code	option
Oscillator	4.0 ~ 54.0 MHz	JO22H	see table 1	1.8 = 1.8 V	1 = 15 pF	blank = -20°C ~ +70°C T1 = -40°C ~ +85°C
Example: O 20.0-JO22H-F-1.8-1-T1 (LF = RoHS compliant / Pb free pins or pads)						




B.C.E. s.r.l.
Via Regina Pacis, 54/c - 41049 SASSUOLO (MO) Italy
Tel. +39 0536 811.616 r.a. - Fax +39 0536 811.500
www.bce.it - E-mail: bce@bce.it




Oscillator · JO22H · 1.8 V · Low Power

Taping Specification

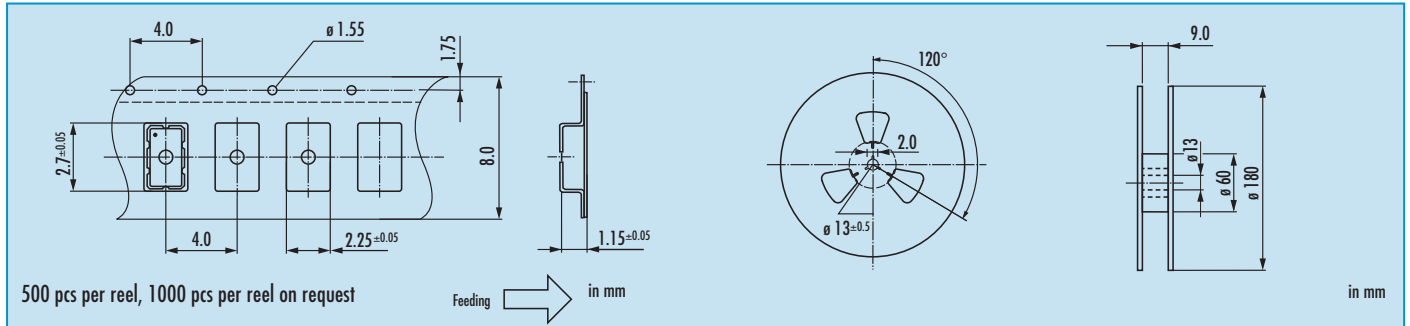

Reflow Soldering Profile

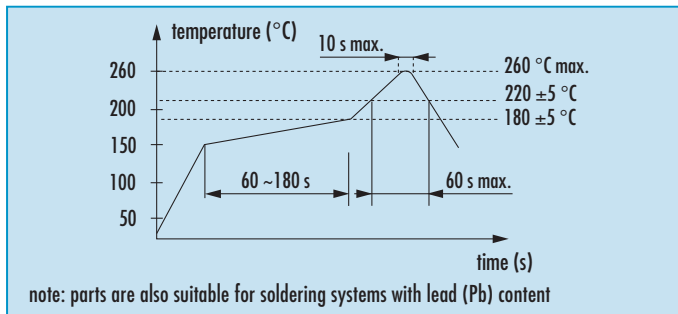

Marking

frequency
company code / stability code / date code

date code:

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

A ~ M: Jan. - Dec.
0: 2010 3: 2013
1: 2011 4: 2014
2: 2012 5: 2015

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Programmed Oscillator · JPO75 · 3.3/2.5/1.8 V

Programmed SMD CMOS Oscillator · 7.0 x 5.0 mm

- fast delivery service
- tristate or stop function available
- reflow soldering temperature: 260 °C max.
- RoHS compliant, ceramic/metal package



General Data

type	JPO75 3.3 V / 2.5 V / 1.8 V	
frequency range	3.0 ~ 200.0 MHz (3.3 V, 15 pF)	
	3.0 ~ 130.0 MHz (2.5 V, 15 pF)	
	3.0 ~ 100.0 MHz (1.8 V, 15 pF)	
	3.0 ~ 50.0 MHz (3.3 V / 2.5 V / 1.8 V, 30 pF)	
frequency stability over all*	± 25 ppm ~ ± 100 ppm (see table 1)	
current consumption	see table 2	
supply voltage V_{DC}	3.3 V / 2.5 V / 1.8 V ± 10%	
temperature	operating	-20 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15 pF / 30 pF
	current max.	8 mA (3.3 V) / 4 mA (2.5 V) / 2 mA (1.8 V)
	low level max.	0.4 V
	high level min.	V _{DC} - 0.4 V
standby function	tristate (TRI) / stop (STP)	
output enable time max.	100 ns (TRI) / 10 ms (STP)	
output disable time max.	250 ns	
start-up time max.	10 ms	
standby current max.	10 µA (STP version only)	
symmetry at 0.5 x V_{DC}	45% ~ 55% typ. (40% ~ 60% max.)	

Table 1: Frequency Stability Code

stability code	A	B	G	C
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm
-20 °C ~ +70 °C	○	○	○	○
-40 °C ~ +85 °C	○	○	○	○
○ available				

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


frequency range	V _{DC} = 3.3 V	V _{DC} = 2.5 V	V _{DC} = 1.8 V	load
3.0 ~ 50.0 MHz	18 mA	15 mA	8 mA	30 pF
3.0 ~ 100.0 MHz	17 mA	12 mA	8 mA	15 pF
100.0 ~ 130.0 MHz	20 mA	16 mA	—	15 pF
130.0 ~ 200.0 MHz	25 mA	—	—	15 pF

* a ceramics capacitor of 100nF between pin #2 and pin #4 with short distance wiring is strongly recommended

Table 3: Rise & fall time max.

6 ns: 3.0 ~ 50.0 MHz at 30 pF / 1.8 V	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5 ns: 3.0 ~ 50.0 MHz at 30 pF / 3.3 V & 2.5 V	
4 ns: 3.0 ~ 100.0 MHz at 15 pF / 3.3 V & 2.5 V & 1.8 V	
3 ns: 100.0 ~ 130.0 MHz at 15 pF / 2.5 V & 3.3 V	
2 ns: 130.0 ~ 200.0 MHz at 15 pF / 3.3 V	

Dimensions

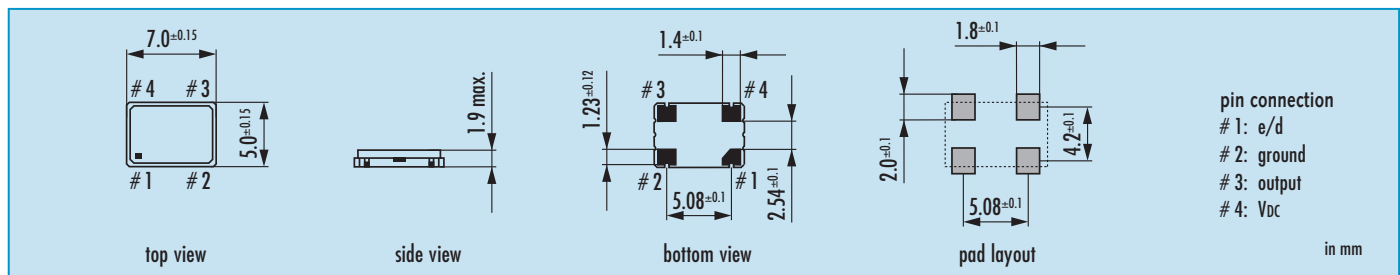


Order Information

0	frequency in MHz	type	frequency stability code	supply voltage code	output load code	temp. range	standby function
Oscillator	3.0 ~ 200.0 MHz (3.3 V) 3.0 ~ 130.0 MHz (2.5 V) 3.0 ~ 100.0 MHz (1.8 V)	JPO75	see table 1	3.3 = 3.3 V 2.5 = 2.5 V 1.8 = 1.8 V	1 = 15 pF 2 = 30 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C	STP = stop function TRI = tristate function
Example: O 125.0-JPO75-B-2.5-1-T1-TRI-LF (LF = RoHS compliant / Pb free pins or pads)							




Programmed Oscillator · JPO75 · 3.3/2.5/1.8 V

Taping specification

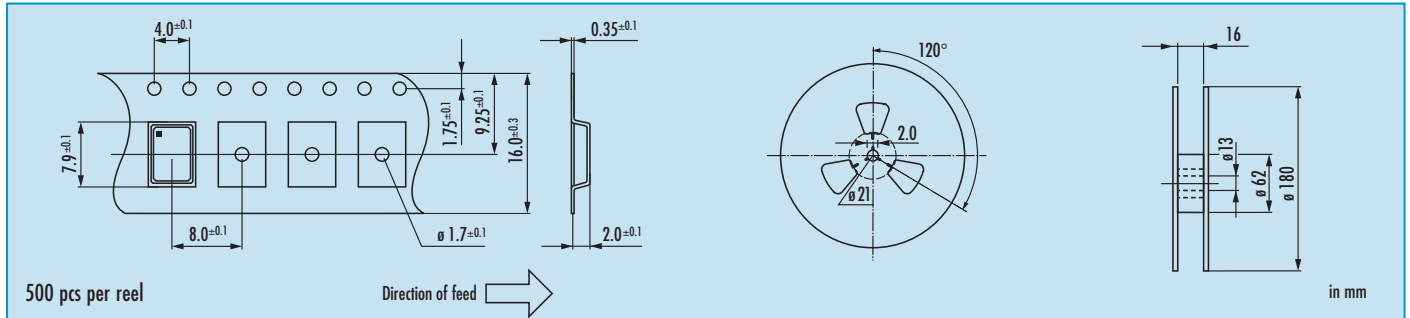

Reflow Soldering Profile

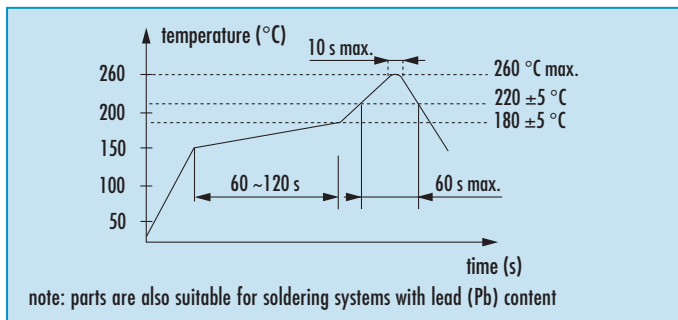

Marking (optional)

JPO / year / month / internal code

date code:

A ~ M: Jan. - Dec.

1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.7 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.3 V_{DC}$)	high impedance

tristate (TRI) function:

- oscillator active
- output high impedance (weak pull up)





actual size

Programmed Oscillator · JPO75 · 3.3/2.5/1.8 V

Programmed SMD CMOS Oscillator · 7.0 x 5.0 mm

- fast delivery service
- tristate or stop function available
- reflow soldering temperature: 260 °C max.
- RoHS compliant, ceramic/metal package



General Data

type	JPO75 3.3 V / 2.5 V / 1.8 V	
frequency range	3.0 ~ 200.0 MHz (3.3 V, 15 pF)	
	3.0 ~ 130.0 MHz (2.5 V, 15 pF)	
	3.0 ~ 100.0 MHz (1.8 V, 15 pF)	
	3.0 ~ 50.0 MHz (3.3 V / 2.5 V / 1.8 V, 30 pF)	
frequency stability over all*	± 25 ppm ~ ± 100 ppm (see table 1)	
current consumption	see table 2	
supply voltage V_{DC}	3.3 V / 2.5 V / 1.8 V ± 10%	
temperature	operating	-20 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15 pF / 30 pF
	current max.	8 mA (3.3 V) / 4 mA (2.5 V) / 2 mA (1.8 V)
	low level max.	0.4 V
	high level min.	V _{DC} - 0.4 V
standby function	tristate (TRI) / stop (STP)	
output enable time max.	100 ns (TRI) / 10 ms (STP)	
output disable time max.	250 ns	
start-up time max.	10 ms	
standby current max.	10 µA (STP version only)	
symmetry at 0.5 x V_{DC}	45% ~ 55% typ. (40% ~ 60% max.)	

Table 1: Frequency Stability Code

stability code	A	B	G	C
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm
-20 °C ~ +70 °C	○	○	○	○
-40 °C ~ +85 °C	○	○	○	○
○ available				

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


frequency range	V _{DC} = 3.3 V	V _{DC} = 2.5 V	V _{DC} = 1.8 V	load
3.0 ~ 50.0 MHz	18 mA	15 mA	8 mA	30 pF
3.0 ~ 100.0 MHz	17 mA	12 mA	8 mA	15 pF
100.0 ~ 130.0 MHz	20 mA	16 mA	—	15 pF
130.0 ~ 200.0 MHz	25 mA	—	—	15 pF

* a ceramics capacitor of 100nF between pin #2 and pin #4 with short distance wiring is strongly recommended

Table 3: Rise & fall time max.

6 ns: 3.0 ~ 50.0 MHz at 30 pF / 1.8 V	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5 ns: 3.0 ~ 50.0 MHz at 30 pF / 3.3 V & 2.5 V	
4 ns: 3.0 ~ 100.0 MHz at 15 pF / 3.3 V & 2.5 V & 1.8 V	
3 ns: 100.0 ~ 130.0 MHz at 15 pF / 2.5 V & 3.3 V	
2 ns: 130.0 ~ 200.0 MHz at 15 pF / 3.3 V	

Dimensions

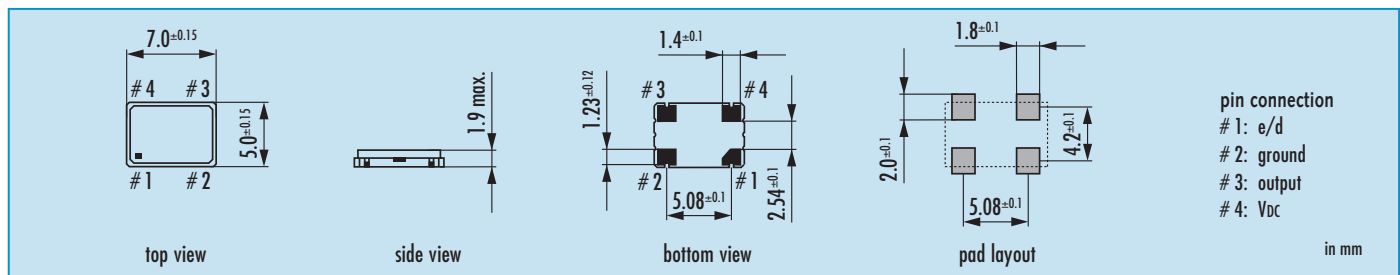

Order Information


0	frequency in MHz	type	frequency stability code	supply voltage code	output load code	temp. range	standby function
Oscillator	3.0 ~ 200.0 MHz (3.3 V) 3.0 ~ 130.0 MHz (2.5 V) 3.0 ~ 100.0 MHz (1.8 V)	JPO75	see table 1	3.3 = 3.3 V 2.5 = 2.5 V 1.8 = 1.8 V	1 = 15 pF 2 = 30 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C	STP = stop function TRI = tristate function

Example: O 125.0-JPO75-B-2.5-1-T1-TRI-LF (LF = RoHS compliant / Pb free pins or pads)




Programmed Oscillator · JPO75 · 3.3/2.5/1.8 V

Taping specification

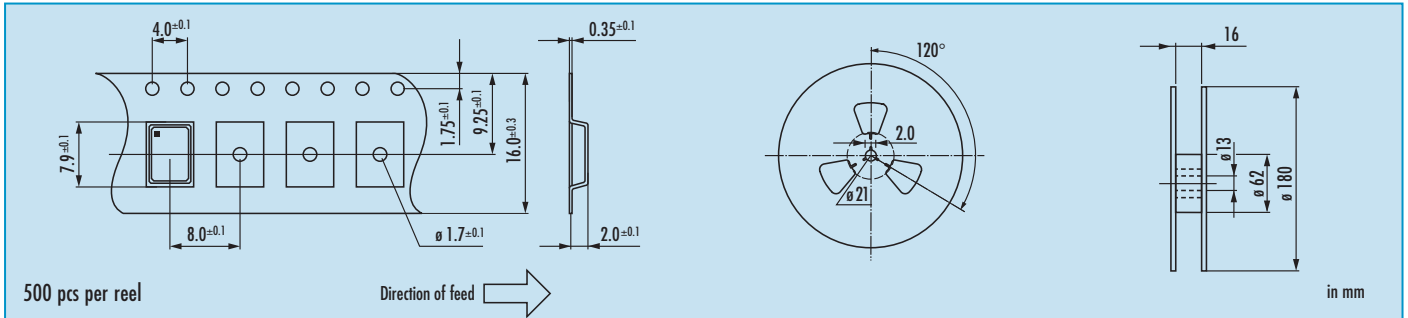

Reflow Soldering Profile

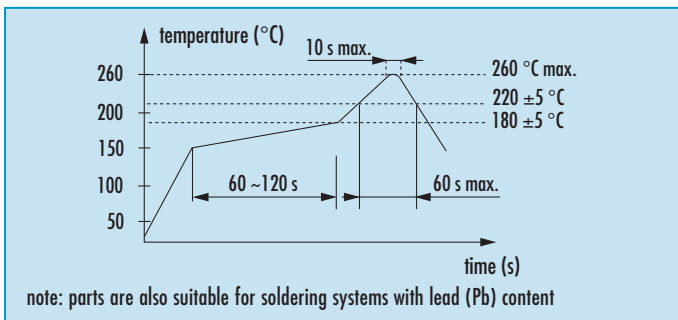

Marking (optional)

JPO / year / month / internal code

date code:

A ~ M: Jan. - Dec.

1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.7 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.3 V_{DC}$)	high impedance

tristate (TRI) function:

- oscillator active
- output high impedance (weak pull up)





actual size

Programmed Oscillator · JPO75 · 3.3/2.5/1.8 V

Programmed SMD CMOS Oscillator · 7.0 x 5.0 mm

- fast delivery service
- tristate or stop function available
- reflow soldering temperature: 260 °C max.
- RoHS compliant, ceramic/metal package



General Data

type	JPO75 3.3 V / 2.5 V / 1.8 V	
frequency range	3.0 ~ 200.0 MHz (3.3 V, 15 pF)	
	3.0 ~ 130.0 MHz (2.5 V, 15 pF)	
	3.0 ~ 100.0 MHz (1.8 V, 15 pF)	
	3.0 ~ 50.0 MHz (3.3 V / 2.5 V / 1.8 V, 30 pF)	
frequency stability over all*	± 25 ppm ~ ± 100 ppm (see table 1)	
current consumption	see table 2	
supply voltage V_{DC}	3.3 V / 2.5 V / 1.8 V ± 10%	
temperature	operating	-20 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15 pF / 30 pF
	current max.	8 mA (3.3 V) / 4 mA (2.5 V) / 2 mA (1.8 V)
	low level max.	0.4 V
	high level min.	V _{DC} - 0.4 V
standby function	tristate (TRI) / stop (STP)	
output enable time max.	100 ns (TRI) / 10 ms (STP)	
output disable time max.	250 ns	
start-up time max.	10 ms	
standby current max.	10 µA (STP version only)	
symmetry at 0.5 x V_{DC}	45% ~ 55% typ. (40% ~ 60% max.)	

Table 1: Frequency Stability Code

stability code	A	B	G	C
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm
-20 °C ~ +70 °C	○	○	○	○
-40 °C ~ +85 °C	○	○	○	○
○ available				

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


frequency range	V _{DC} = 3.3 V	V _{DC} = 2.5 V	V _{DC} = 1.8 V	load
3.0 ~ 50.0 MHz	18 mA	15 mA	8 mA	30 pF
3.0 ~ 100.0 MHz	17 mA	12 mA	8 mA	15 pF
100.0 ~ 130.0 MHz	20 mA	16 mA	—	15 pF
130.0 ~ 200.0 MHz	25 mA	—	—	15 pF

* a ceramics capacitor of 100nF between pin #2 and pin #4 with short distance wiring is strongly recommended

Table 3: Rise & fall time max.

6 ns:	3.0 ~ 50.0 MHz at 30 pF / 1.8 V	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5 ns:	3.0 ~ 50.0 MHz at 30 pF / 3.3 V & 2.5 V	
4 ns:	3.0 ~ 100.0 MHz at 15 pF / 3.3 V & 2.5 V & 1.8 V	
3 ns:	100.0 ~ 130.0 MHz at 15 pF / 2.5 V & 3.3 V	
2 ns:	130.0 ~ 200.0 MHz at 15 pF / 3.3 V	

Dimensions

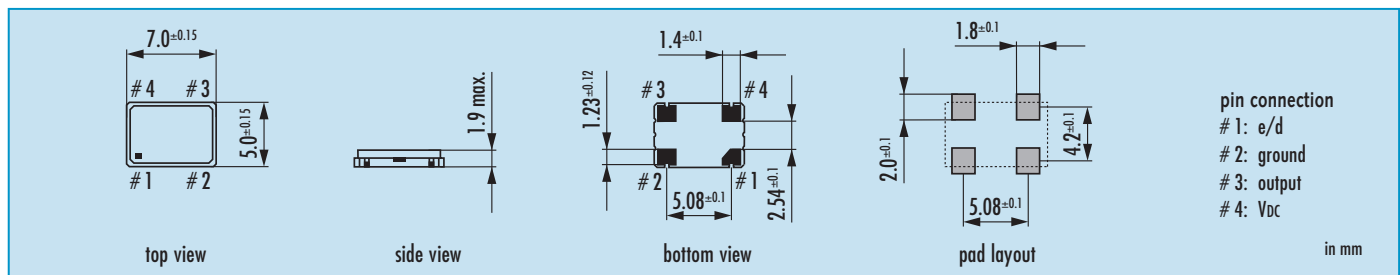

Order Information


0	frequency in MHz	type	frequency stability code	supply voltage code	output load code	temp. range	standby function
Oscillator	3.0 ~ 200.0 MHz (3.3 V) 3.0 ~ 130.0 MHz (2.5 V) 3.0 ~ 100.0 MHz (1.8 V)	JPO75	see table 1	3.3 = 3.3 V 2.5 = 2.5 V 1.8 = 1.8 V	1 = 15 pF 2 = 30 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C	STP = stop function TRI = tristate function

Example: O 125.0-JPO75-B-2.5-1-T1-TRI-LF (LF = RoHS compliant / Pb free pins or pads)




Programmed Oscillator · JPO75 · 3.3/2.5/1.8 V

Taping specification

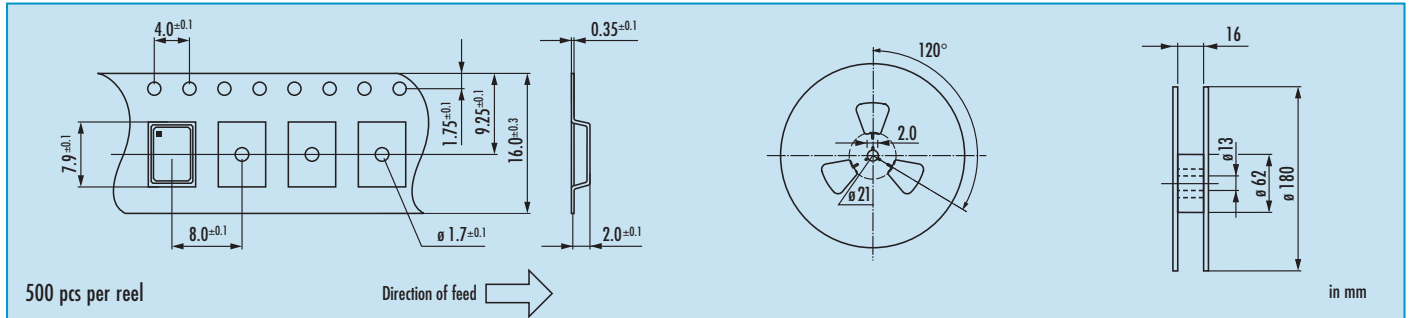

Reflow Soldering Profile

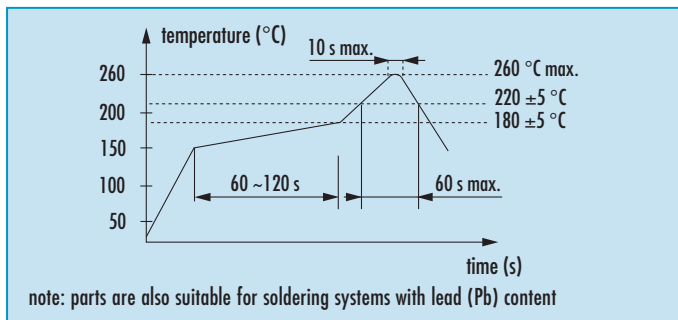

Marking (optional)

JPO / year / month / internal code

date code:

A ~ M: Jan. - Dec.

1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.7 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.3 V_{DC}$)	high impedance

tristate (TRI) function:

- oscillator active
- output high impedance (weak pull up)





actual size

Programmed Oscillator · JPO53 · 3.3/2.5/1.8 V

Programmed SMD CMOS Oscillator · 5.0 x 3.2 mm

- fast delivery service
- tristate or stop function available
- reflow soldering temperature: 260 °C max.
- RoHS compliant, ceramic/metal package



General Data

type	JPO53 3.3 V / 2.5 V / 1.8 V	
frequency range	3.0 ~ 200.0 MHz (3.3 V, 15 pF)	
	3.0 ~ 130.0 MHz (2.5 V, 15 pF)	
	3.0 ~ 100.0 MHz (1.8 V, 15 pF)	
	3.0 ~ 50.0 MHz (3.3 V / 2.5 V / 1.8 V, 30 pF)	
frequency stability over all*	± 25 ppm ~ ± 100 ppm (see table 1)	
current consumption	see table 2	
supply voltage V_{DC}	3.3 V / 2.5 V / 1.8 V ± 10%	
temperature	operating	-20 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15 pF / 30 pF
	current max.	8 mA (3.3 V) / 4 mA (2.5 V) / 2 mA (1.8 V)
	low level max.	0.4 V
	high level min.	V _{DC} - 0.4 V
standby function	tristate (TRI) / stop (STP)	
output enable time max.	100 ns (TRI) / 10 ms (STP)	
output disable time max.	250 ns	
start-up time max.	10 ms	
standby current max.	10 µA (STP version only)	
symmetry at 0.5 x V_{DC}	45% ~ 55% typ. (40% ~ 60% max.)	

Table 1: Frequency Stability Code

stability code	A	B	G	C
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm
-20 °C ~ +70 °C	○	○	○	○
-40 °C ~ +85 °C	○	○	○	○
○ available				

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


frequency range	V _{DC} = 3.3 V	V _{DC} = 2.5 V	V _{DC} = 1.8 V	load
3.0 ~ 50.0 MHz	18 mA	15 mA	8 mA	30 pF
3.0 ~ 100.0 MHz	17 mA	12 mA	8 mA	15 pF
100.0 ~ 130.0 MHz	20 mA	16 mA	—	15 pF
130.0 ~ 200.0 MHz	25 mA	—	—	15 pF

* a ceramics capacitor of 100nF between pin #2 and pin #4 with short distance wiring is strongly recommended


Table 3: Rise & fall time max.

6 ns: 3.0 ~ 50.0 MHz at 30 pF / 1.8 V	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5 ns: 3.0 ~ 50.0 MHz at 30 pF / 3.3 V & 2.5 V	
4 ns: 3.0 ~ 100.0 MHz at 15 pF / 3.3 V & 2.5 V & 1.8 V	
3 ns: 100.0 ~ 130.0 MHz at 15 pF / 2.5 V & 3.3 V	
2 ns: 130.0 ~ 200.0 MHz at 15 pF / 3.3 V	

Dimensions

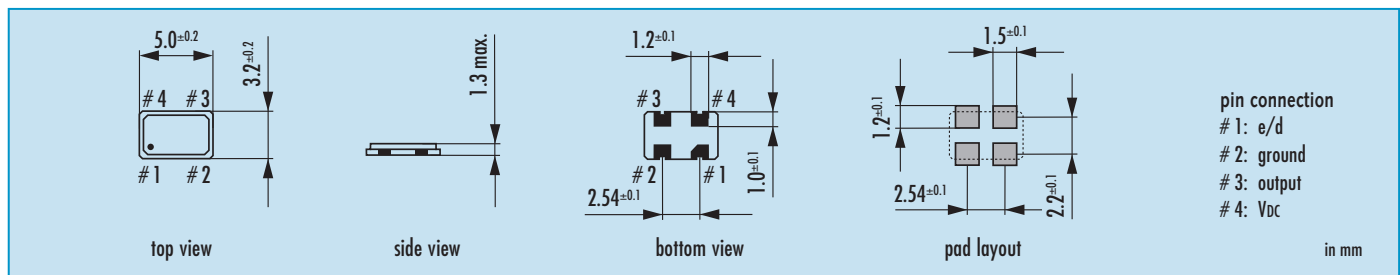


Order Information

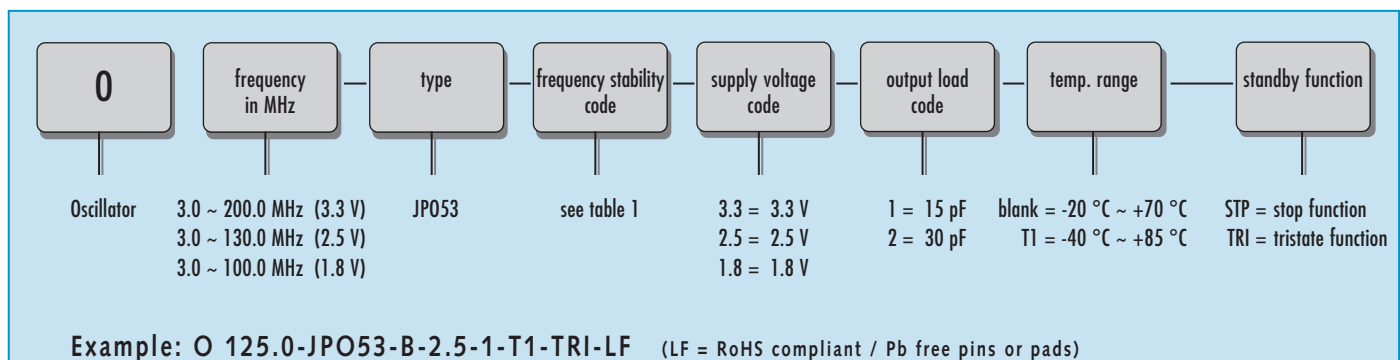


Programmed Oscillator · JPO53 · 3.3/2.5/1.8 V

Taping specification

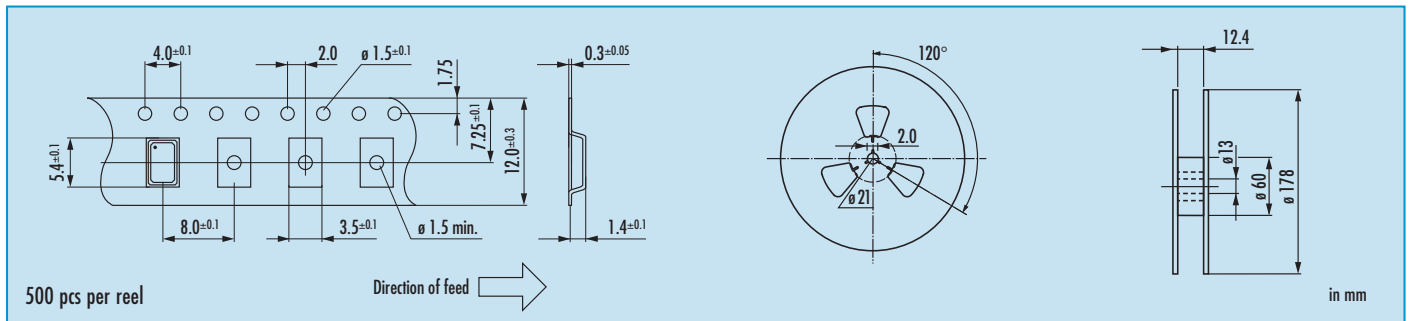

Reflow Soldering Profile

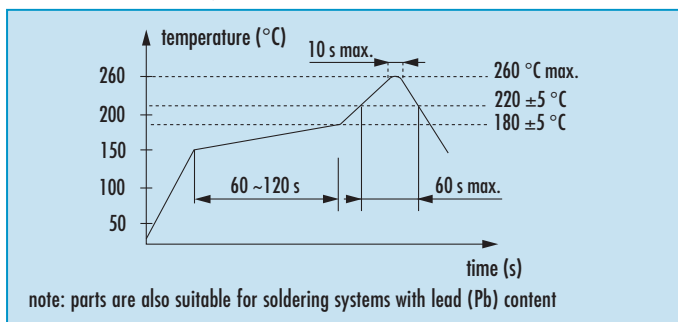

Marking (optional)

JPO / year / month / internal code

date code:

A ~ M: Jan. - Dec.

1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.7 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.3 V_{DC}$)	high impedance
tristate (TRI) function:	
• oscillator active	
• output high impedance (weak pull up)	





actual size

Programmed Oscillator · JPO53 · 3.3/2.5/1.8 V

Programmed SMD CMOS Oscillator · 5.0 x 3.2 mm

- fast delivery service
- tristate or stop function available
- reflow soldering temperature: 260 °C max.
- RoHS compliant, ceramic/metal package



General Data

type	JPO53 3.3 V / 2.5 V / 1.8 V	
frequency range	3.0 ~ 200.0 MHz (3.3 V, 15 pF)	
	3.0 ~ 130.0 MHz (2.5 V, 15 pF)	
	3.0 ~ 100.0 MHz (1.8 V, 15 pF)	
	3.0 ~ 50.0 MHz (3.3 V / 2.5 V / 1.8 V, 30 pF)	
frequency stability over all*	± 25 ppm ~ ± 100 ppm (see table 1)	
current consumption	see table 2	
supply voltage V_{DC}	3.3 V / 2.5 V / 1.8 V ± 10%	
temperature	operating	-20 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15 pF / 30 pF
	current max.	8 mA (3.3 V) / 4 mA (2.5 V) / 2 mA (1.8 V)
	low level max.	0.4 V
	high level min.	V _{DC} - 0.4 V
standby function	tristate (TRI) / stop (STP)	
output enable time max.	100 ns (TRI) / 10 ms (STP)	
output disable time max.	250 ns	
start-up time max.	10 ms	
standby current max.	10 µA (STP version only)	
symmetry at 0.5 x V_{DC}	45% ~ 55% typ. (40% ~ 60% max.)	

Table 1: Frequency Stability Code

stability code	A	B	G	C
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm
-20 °C ~ +70 °C	○	○	○	○
-40 °C ~ +85 °C	○	○	○	○
○ available				

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


frequency range	V _{DC} = 3.3 V	V _{DC} = 2.5 V	V _{DC} = 1.8 V	load
3.0 ~ 50.0 MHz	18 mA	15 mA	8 mA	30 pF
3.0 ~ 100.0 MHz	17 mA	12 mA	8 mA	15 pF
100.0 ~ 130.0 MHz	20 mA	16 mA	—	15 pF
130.0 ~ 200.0 MHz	25 mA	—	—	15 pF

* a ceramics capacitor of 100nF between pin #2 and pin #4 with short distance wiring is strongly recommended

Table 3: Rise & fall time max.

6 ns:	3.0 ~ 50.0 MHz at 30 pF / 1.8 V	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5 ns:	3.0 ~ 50.0 MHz at 30 pF / 3.3 V & 2.5 V	
4 ns:	3.0 ~ 100.0 MHz at 15 pF / 3.3 V & 2.5 V & 1.8 V	
3 ns:	100.0 ~ 130.0 MHz at 15 pF / 2.5 V & 3.3 V	
2 ns:	130.0 ~ 200.0 MHz at 15 pF / 3.3 V	

Dimensions

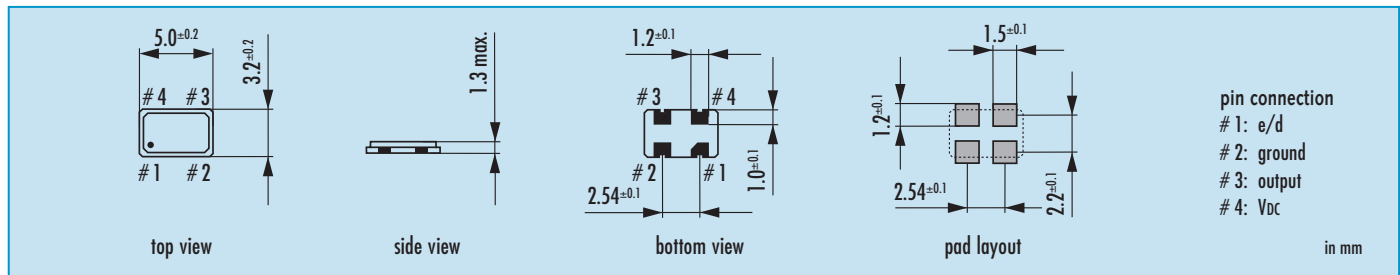


Order Information

0	frequency in MHz	type	frequency stability code	supply voltage code	output load code	temp. range	standby function
Oscillator	3.0 ~ 200.0 MHz (3.3 V) 3.0 ~ 130.0 MHz (2.5 V) 3.0 ~ 100.0 MHz (1.8 V)	JPO53	see table 1	3.3 = 3.3 V 2.5 = 2.5 V 1.8 = 1.8 V	1 = 15 pF 2 = 30 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C	STP = stop function TRI = tristate function
Example: O 125.0-JPO53-B-2.5-1-T1-TRI-LF (LF = RoHS compliant / Pb free pins or pads)							




Programmed Oscillator · JPO53 · 3.3/2.5/1.8 V

Taping specification

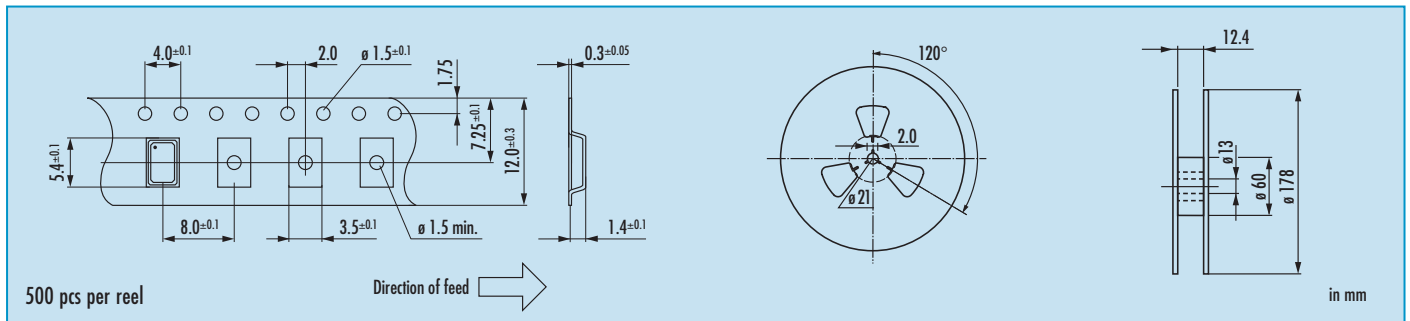

Reflow Soldering Profile

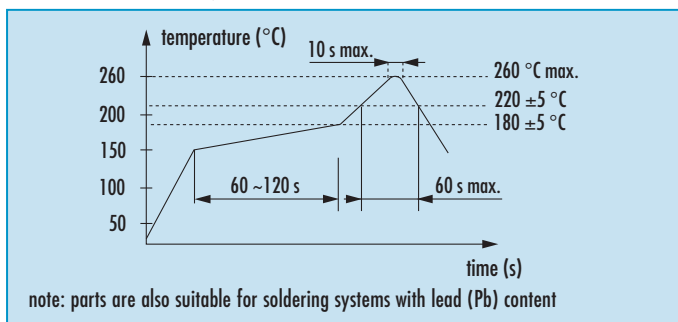

Marking (optional)

JPO / year / month / internal code

date code:

A ~ M: Jan. - Dec.

1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.7 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.3 V_{DC}$)	high impedance
tristate (TRI) function:	
• oscillator active	
• output high impedance (weak pull up)	





actual size

Programmed Oscillator · JPO53 · 3.3/2.5/1.8 V

Programmed SMD CMOS Oscillator · 5.0 x 3.2 mm

- fast delivery service
- tristate or stop function available
- reflow soldering temperature: 260 °C max.
- RoHS compliant, ceramic/metal package



General Data

type	JPO53 3.3 V / 2.5 V / 1.8 V	
frequency range	3.0 ~ 200.0 MHz (3.3 V, 15 pF)	
	3.0 ~ 130.0 MHz (2.5 V, 15 pF)	
	3.0 ~ 100.0 MHz (1.8 V, 15 pF)	
	3.0 ~ 50.0 MHz (3.3 V / 2.5 V / 1.8 V, 30 pF)	
frequency stability over all*	± 25 ppm ~ ± 100 ppm (see table 1)	
current consumption	see table 2	
supply voltage V_{DC}	3.3 V / 2.5 V / 1.8 V ± 10%	
temperature	operating	-20 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15 pF / 30 pF
	current max.	8 mA (3.3 V) / 4 mA (2.5 V) / 2 mA (1.8 V)
	low level max.	0.4 V
	high level min.	V _{DC} - 0.4 V
standby function	tristate (TRI) / stop (STP)	
output enable time max.	100 ns (TRI) / 10 ms (STP)	
output disable time max.	250 ns	
start-up time max.	10 ms	
standby current max.	10 µA (STP version only)	
symmetry at 0.5 x V_{DC}	45% ~ 55% typ. (40% ~ 60% max.)	

Table 1: Frequency Stability Code

stability code	A	B	G	C
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm
-20 °C ~ +70 °C	○	○	○	○
-40 °C ~ +85 °C	○	○	○	○
○ available				

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


frequency range	V _{DC} = 3.3 V	V _{DC} = 2.5 V	V _{DC} = 1.8 V	load
3.0 ~ 50.0 MHz	18 mA	15 mA	8 mA	30 pF
3.0 ~ 100.0 MHz	17 mA	12 mA	8 mA	15 pF
100.0 ~ 130.0 MHz	20 mA	16 mA	—	15 pF
130.0 ~ 200.0 MHz	25 mA	—	—	15 pF

* a ceramics capacitor of 100nF between pin #2 and pin #4 with short distance wiring is strongly recommended

Table 3: Rise & fall time max.

6 ns: 3.0 ~ 50.0 MHz at 30 pF / 1.8 V	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5 ns: 3.0 ~ 50.0 MHz at 30 pF / 3.3 V & 2.5 V	
4 ns: 3.0 ~ 100.0 MHz at 15 pF / 3.3 V & 2.5 V & 1.8 V	
3 ns: 100.0 ~ 130.0 MHz at 15 pF / 2.5 V & 3.3 V	
2 ns: 130.0 ~ 200.0 MHz at 15 pF / 3.3 V	

Dimensions

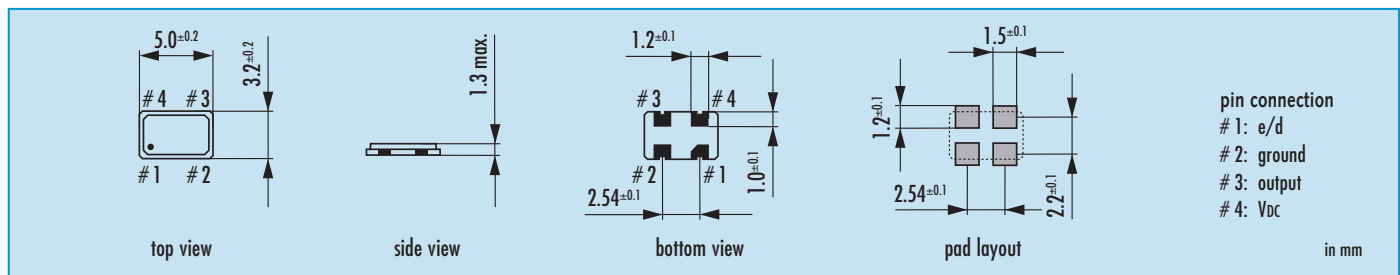


Order Information


0	frequency in MHz	type	frequency stability code	supply voltage code	output load code	temp. range	standby function
Oscillator	3.0 ~ 200.0 MHz (3.3 V) 3.0 ~ 130.0 MHz (2.5 V) 3.0 ~ 100.0 MHz (1.8 V)	JPO53	see table 1	3.3 = 3.3 V 2.5 = 2.5 V 1.8 = 1.8 V	1 = 15 pF 2 = 30 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C	STP = stop function TRI = tristate function
Example: O 125.0-JPO53-B-2.5-1-T1-TRI-LF (LF = RoHS compliant / Pb free pins or pads)							



Taping specification

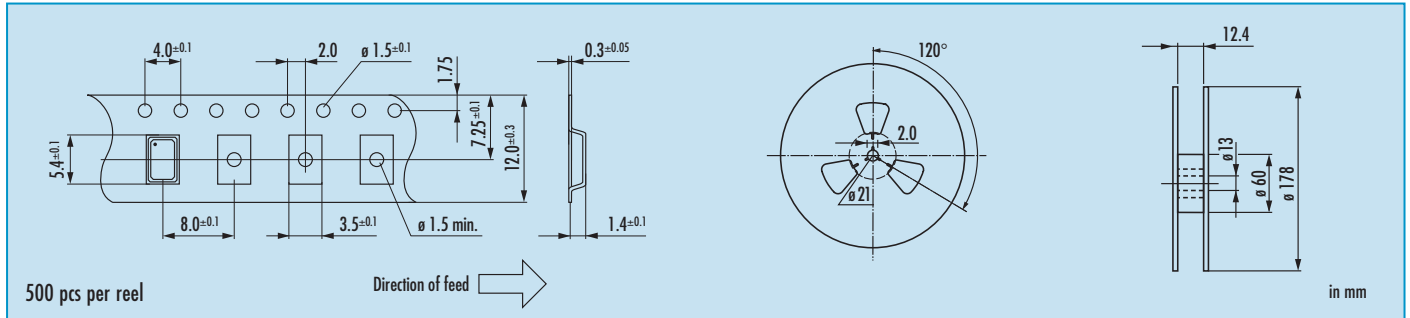

Reflow Soldering Profile

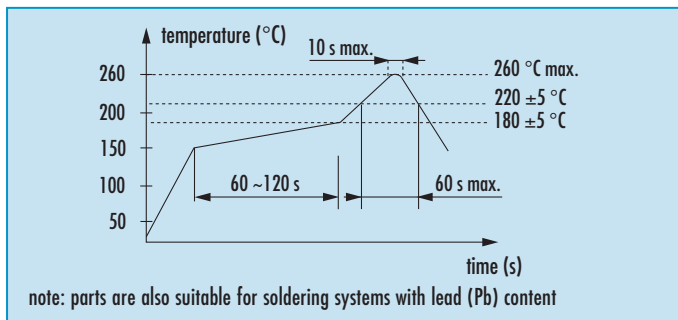

Marking (optional)

JPO / year / month / internal code

date code:

A ~ M: Jan. - Dec.

1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.7 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.3 V_{DC}$)	high impedance
tristate (TRI) function:	
• oscillator active	
• output high impedance (weak pull up)	





actual size

Programmed Oscillator · JPO32 · 3.3/2.5/1.8 V

Programmed SMD CMOS Oscillator · 3.2 x 2.5 mm

- fast delivery service
- tristate or stop function available
- reflow soldering temperature: 260 °C max.
- RoHS compliant, ceramic/metal package



General Data

type	JPO32 3.3 V / 2.5 V / 1.8 V	
frequency range	3.0 ~ 200.0 MHz (3.3 V, 15 pF)	
	3.0 ~ 130.0 MHz (2.5 V, 15 pF)	
	3.0 ~ 100.0 MHz (1.8 V, 15 pF)	
	3.0 ~ 50.0 MHz (3.3 V / 2.5 V / 1.8 V, 30 pF)	
frequency stability over all*	± 25 ppm ~ ± 100 ppm (see table 1)	
current consumption	see table 2	
supply voltage V_{DC}	3.3 V / 2.5 V / 1.8 V ± 10%	
temperature	operating	-20 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15 pF / 30 pF
	current max.	8 mA (3.3 V) / 4 mA (2.5 V) / 2 mA (1.8 V)
	low level max.	0.4 V
	high level min.	V _{DC} - 0.4 V
standby function	tristate (TRI) / stop (STP)	
output enable time max.	100 ns (TRI) / 10 ms (STP)	
output disable time max.	250 ns	
start-up time max.	10 ms	
standby current max.	10 µA (STP version only)	
symmetry at 0.5 x V_{DC}	45% ~ 55% typ. (40% ~ 60% max.)	

Table 1: Frequency Stability Code

stability code	A	B	G	C
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm
-20 °C ~ +70 °C	○	○	○	○
-40 °C ~ +85 °C	○	○	○	○
○ available				

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.

frequency range	V _{DC} = 3.3 V	V _{DC} = 2.5 V	V _{DC} = 1.8 V	load
3.0 ~ 50.0 MHz	18 mA	15 mA	8 mA	30 pF
3.0 ~ 100.0 MHz	17 mA	12 mA	8 mA	15 pF
100.0 ~ 130.0 MHz	20 mA	16 mA	—	15 pF
130.0 ~ 200.0 MHz	25 mA	—	—	15 pF

* a ceramics capacitor of 100nF between pin #2 and pin #4 with short distance wiring is strongly recommended

Table 3: Rise & fall time max.

6 ns: 3.0 ~ 50.0 MHz at 30 pF / 1.8 V	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5 ns: 3.0 ~ 50.0 MHz at 30 pF / 3.3 V & 2.5 V	
4 ns: 3.0 ~ 100.0 MHz at 15 pF / 3.3 V & 2.5 V & 1.8 V	
3 ns: 100.0 ~ 130.0 MHz at 15 pF / 2.5 V & 3.3 V	
2 ns: 130.0 ~ 200.0 MHz at 15 pF / 3.3 V	

Dimensions

pin connection
1: e/d
2: ground
3: output
4: V_{DC}

in mm


Order Information

0	frequency in MHz	type	frequency stability code	supply voltage code	output load code	temp. range	standby function
Oscillator	3.0 ~ 200.0 MHz (3.3 V) 3.0 ~ 130.0 MHz (2.5 V) 3.0 ~ 100.0 MHz (1.8 V)	JPO32	see table 1	3.3 = 3.3 V 2.5 = 2.5 V 1.8 = 1.8 V	1 = 15 pF 2 = 30 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C	STP = stop function TRI = tristate function
Example: O 125.0-JPO32-B-2.5-1-T1-STP-LF (LF = RoHS compliant / Pb free pins or pads)							




Programmed Oscillator · JPO32 · 3.3/2.5/1.8 V

Taping specification

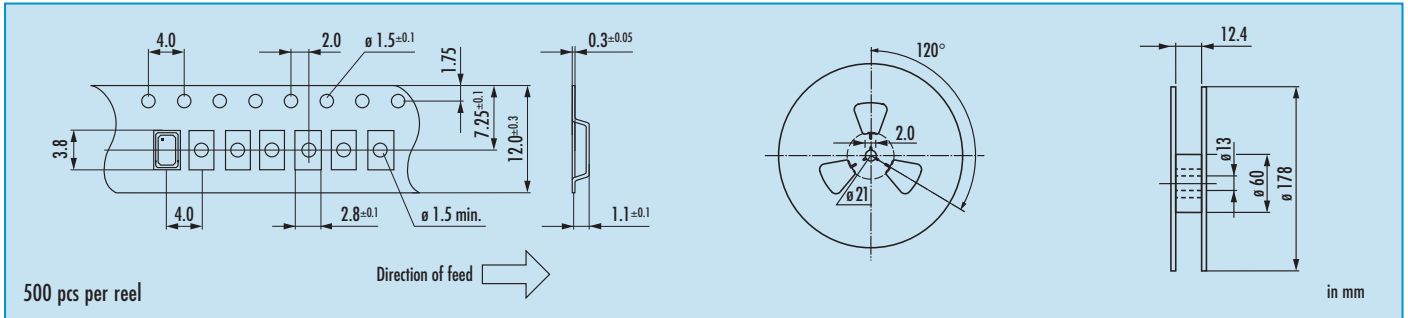

Reflow Soldering Profile

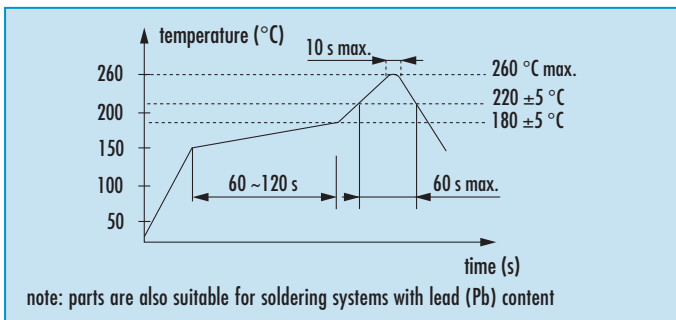

Marking (optional)

JPO / year / month / internal code

date code:

A ~ M: Jan. - Dec.

1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output, STP)	pin #3 (output, TRI)
open	active	active
high "1" ($V_{IH} \geq 0.7 V_{DC}$)	active	active
low "0" ($V_{IL} \leq 0.3 V_{DC}$)	stop, high impedance	high impedance
	stop (STP) function:	tristate (TRI) function:
	• oscillator stops	• oscillator active
	• output high impedance	• output high impedance





actual size

Programmed Oscillator · JPO32 · 3.3/2.5/1.8 V

Programmed SMD CMOS Oscillator · 3.2 x 2.5 mm

- fast delivery service
- tristate or stop function available
- reflow soldering temperature: 260 °C max.
- RoHS compliant, ceramic/metal package



General Data

type	JPO32 3.3 V / 2.5 V / 1.8 V	
frequency range	3.0 ~ 200.0 MHz (3.3 V, 15 pF)	
	3.0 ~ 130.0 MHz (2.5 V, 15 pF)	
	3.0 ~ 100.0 MHz (1.8 V, 15 pF)	
	3.0 ~ 50.0 MHz (3.3 V / 2.5 V / 1.8 V, 30 pF)	
frequency stability over all*	± 25 ppm ~ ± 100 ppm (see table 1)	
current consumption	see table 2	
supply voltage V_{DC}	3.3 V / 2.5 V / 1.8 V ± 10%	
temperature	operating	-20 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15 pF / 30 pF
	current max.	8 mA (3.3 V) / 4 mA (2.5 V) / 2 mA (1.8 V)
	low level max.	0.4 V
	high level min.	V _{DC} - 0.4 V
standby function	tristate (TRI) / stop (STP)	
output enable time max.	100 ns (TRI) / 10 ms (STP)	
output disable time max.	250 ns	
start-up time max.	10 ms	
standby current max.	10 µA (STP version only)	
symmetry at 0.5 x V_{DC}	45% ~ 55% typ. (40% ~ 60% max.)	

Table 1: Frequency Stability Code

stability code	A	B	G	C
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm
-20 °C ~ +70 °C	○	○	○	○
-40 °C ~ +85 °C	○	○	○	○
○ available				

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.


frequency range	V _{DC} = 3.3 V	V _{DC} = 2.5 V	V _{DC} = 1.8 V	load
3.0 ~ 50.0 MHz	18 mA	15 mA	8 mA	30 pF
3.0 ~ 100.0 MHz	17 mA	12 mA	8 mA	15 pF
100.0 ~ 130.0 MHz	20 mA	16 mA	—	15 pF
130.0 ~ 200.0 MHz	25 mA	—	—	15 pF

* a ceramics capacitor of 100nF between pin #2 and pin #4 with short distance wiring is strongly recommended

Table 3: Rise & fall time max.

6 ns:	3.0 ~ 50.0 MHz at 30 pF / 1.8 V	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5 ns:	3.0 ~ 50.0 MHz at 30 pF / 3.3 V & 2.5 V	
4 ns:	3.0 ~ 100.0 MHz at 15 pF / 3.3 V & 2.5 V & 1.8 V	
3 ns:	100.0 ~ 130.0 MHz at 15 pF / 2.5 V & 3.3 V	
2 ns:	130.0 ~ 200.0 MHz at 15 pF / 3.3 V	

Dimensions

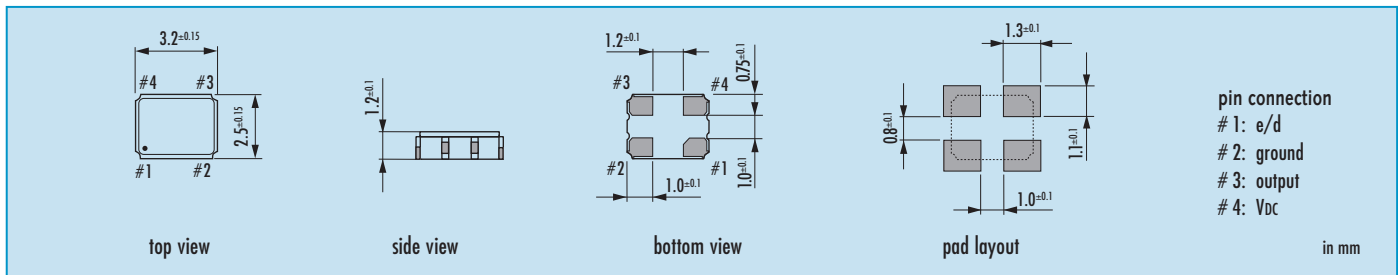


Order Information


0	frequency in MHz	type	frequency stability code	supply voltage code	output load code	temp. range	standby function
Oscillator	3.0 ~ 200.0 MHz (3.3 V) 3.0 ~ 130.0 MHz (2.5 V) 3.0 ~ 100.0 MHz (1.8 V)	JPO32	see table 1	3.3 = 3.3 V 2.5 = 2.5 V 1.8 = 1.8 V	1 = 15 pF 2 = 30 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C	STP = stop function TRI = tristate function
Example: O 125.0-JPO32-B-2.5-1-T1-STP-LF (LF = RoHS compliant / Pb free pins or pads)							



Taping specification

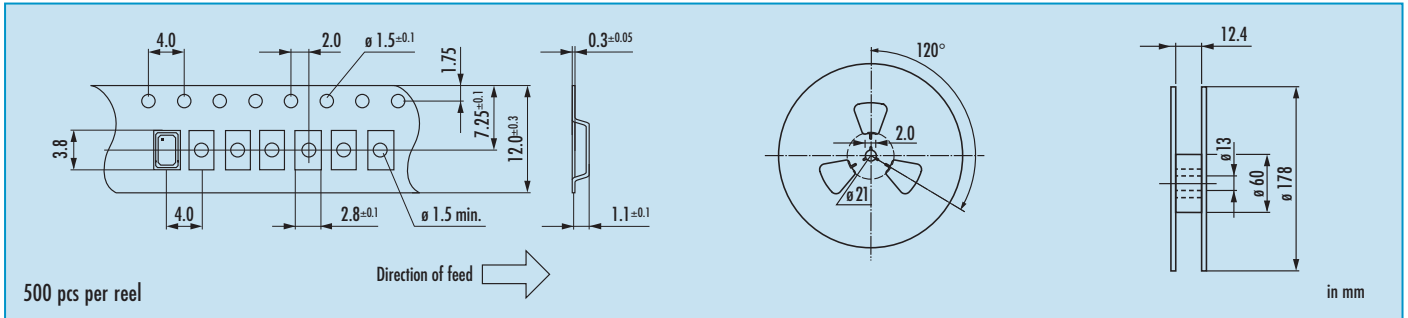

Reflow Soldering Profile

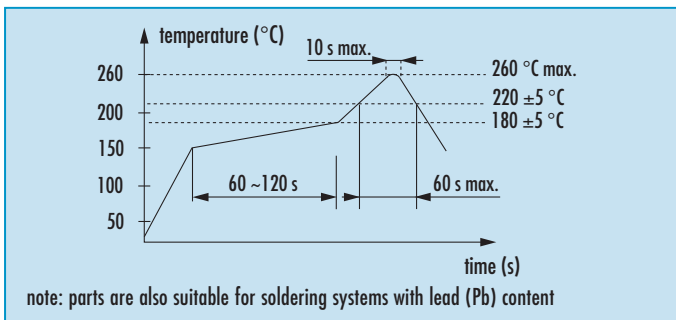

Marking (optional)

JPO / year / month / internal code

date code:

A ~ M: Jan. - Dec.

1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output, STP)	pin #3 (output, TRI)
open	active	active
high "1" ($V_{IH} \geq 0.7 V_{DC}$)	active	active
low "0" ($V_{IL} \leq 0.3 V_{DC}$)	stop, high impedance	high impedance
	stop (STP) function:	tristate (TRI) function:
	• oscillator stops	• oscillator active
	• output high impedance	• output high impedance





actual size

Programmed Oscillator · JPO32 · 3.3/2.5/1.8 V

Programmed SMD CMOS Oscillator · 3.2 x 2.5 mm

- fast delivery service
- tristate or stop function available
- reflow soldering temperature: 260 °C max.
- RoHS compliant, ceramic/metal package



General Data

type	JPO32 3.3 V / 2.5 V / 1.8 V	
frequency range	3.0 ~ 200.0 MHz (3.3 V, 15 pF)	
	3.0 ~ 130.0 MHz (2.5 V, 15 pF)	
	3.0 ~ 100.0 MHz (1.8 V, 15 pF)	
	3.0 ~ 50.0 MHz (3.3 V / 2.5 V / 1.8 V, 30 pF)	
frequency stability over all*	± 25 ppm ~ ± 100 ppm (see table 1)	
current consumption	see table 2	
supply voltage V_{DC}	3.3 V / 2.5 V / 1.8 V ± 10%	
temperature	operating	-20 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15 pF / 30 pF
	current max.	8 mA (3.3 V) / 4 mA (2.5 V) / 2 mA (1.8 V)
	low level max.	0.4 V
	high level min.	V _{DC} - 0.4 V
standby function	tristate (TRI) / stop (STP)	
output enable time max.	100 ns (TRI) / 10 ms (STP)	
output disable time max.	250 ns	
start-up time max.	10 ms	
standby current max.	10 µA (STP version only)	
symmetry at 0.5 x V_{DC}	45% ~ 55% typ. (40% ~ 60% max.)	

Table 1: Frequency Stability Code

stability code	A	B	G	C
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm
-20 °C ~ +70 °C	○	○	○	○
-40 °C ~ +85 °C	○	○	○	○
○ available				

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.

frequency range	V _{DC} = 3.3 V	V _{DC} = 2.5 V	V _{DC} = 1.8 V	load
3.0 ~ 50.0 MHz	18 mA	15 mA	8 mA	30 pF
3.0 ~ 100.0 MHz	17 mA	12 mA	8 mA	15 pF
100.0 ~ 130.0 MHz	20 mA	16 mA	—	15 pF
130.0 ~ 200.0 MHz	25 mA	—	—	15 pF

* a ceramics capacitor of 100nF between pin #2 and pin #4 with short distance wiring is strongly recommended

Table 3: Rise & fall time max.

6 ns:	3.0 ~ 50.0 MHz at 30 pF / 1.8 V	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5 ns:	3.0 ~ 50.0 MHz at 30 pF / 3.3 V & 2.5 V	
4 ns:	3.0 ~ 100.0 MHz at 15 pF / 3.3 V & 2.5 V & 1.8 V	
3 ns:	100.0 ~ 130.0 MHz at 15 pF / 2.5 V & 3.3 V	
2 ns:	130.0 ~ 200.0 MHz at 15 pF / 3.3 V	
2 ns:	130.0 ~ 200.0 MHz at 15 pF / 3.3 V	

Dimensions

pin connection
1: e/d
2: ground
3: output
4: V_{DC}

in mm

Order Information


0	frequency in MHz	type	frequency stability code	supply voltage code	output load code	temp. range	standby function
Oscillator	3.0 ~ 200.0 MHz (3.3 V) 3.0 ~ 130.0 MHz (2.5 V) 3.0 ~ 100.0 MHz (1.8 V)	JPO32	see table 1	3.3 = 3.3 V 2.5 = 2.5 V 1.8 = 1.8 V	1 = 15 pF 2 = 30 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C	STP = stop function TRI = tristate function

Example: O 125.0-JPO32-B-2.5-1-T1-STP-LF (LF = RoHS compliant / Pb free pins or pads)




Programmed Oscillator · JPO32 · 3.3/2.5/1.8 V

Taping specification

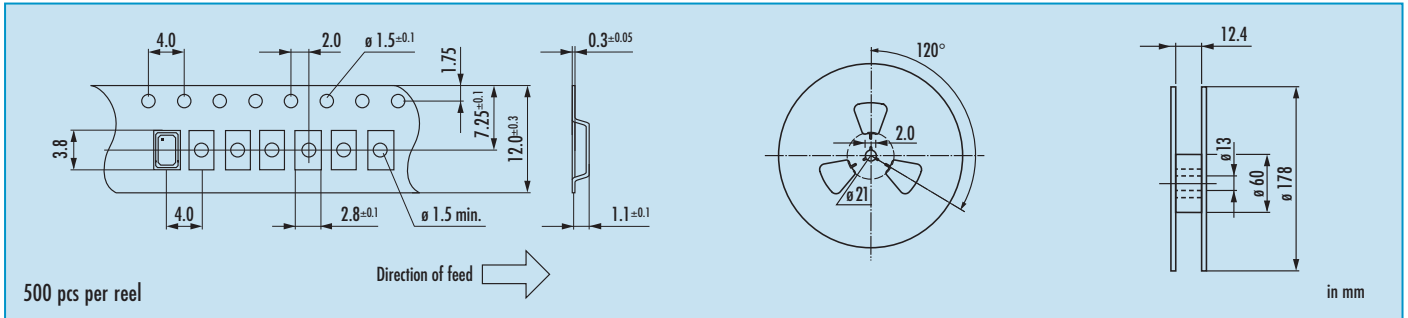

Reflow Soldering Profile

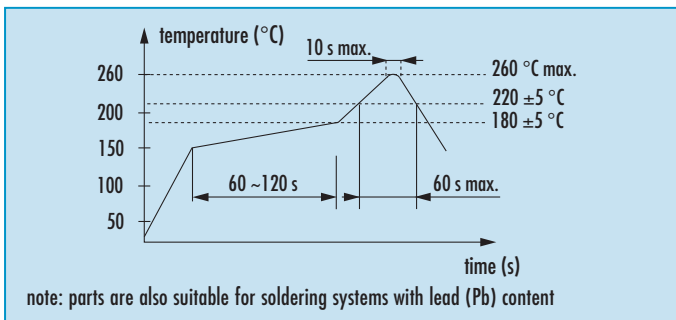

Marking (optional)

JPO / year / month / internal code

date code:

A ~ M: Jan. - Dec.

1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output, STP)	pin #3 (output, TRI)
open	active	active
high "1" ($V_{IH} \geq 0.7 V_{DC}$)	active	active
low "0" ($V_{IL} \leq 0.3 V_{DC}$)	stop, high impedance	high impedance
	stop (STP) function:	tristate (TRI) function:
	• oscillator stops	• oscillator active
	• output high impedance	• output high impedance





actual size

Programmed Oscillator · JPO22 · 3.3/2.5/1.8 V

Programmed SMD CMOS Oscillator · 2.5 x 2.0 mm

- fast delivery service
- tristate or stop function available
- reflow soldering temperature: 260 °C max.
- RoHS compliant, ceramic/metal package



General Data

type	JPO22 3.3 V / 2.5 V / 1.8 V	
frequency range	3.0 ~ 200.0 MHz (3.3 V, 15 pF)	
	3.0 ~ 130.0 MHz (2.5 V, 15 pF)	
	3.0 ~ 100.0 MHz (1.8 V, 15 pF)	
	3.0 ~ 50.0 MHz (3.3 V / 2.5 V / 1.8 V, 30 pF)	
frequency stability over all*	± 25 ppm ~ ± 100 ppm (see table 1)	
current consumption	see table 2	
supply voltage V_{DC}	3.3 V / 2.5 V / 1.8 V ± 10%	
temperature	operating	-20 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15 pF / 30 pF
	current max.	8 mA (3.3 V) / 4 mA (2.5 V) / 2 mA (1.8 V)
	low level max.	0.4 V
	high level min.	V _{DC} - 0.4 V
standby function	tristate (TRI) / stop (STP)	
output enable time max.	100 ns (TRI) / 10 ms (STP)	
output disable time max.	250 ns	
start-up time max.	10 ms	
standby current max.	10 µA (STP version only)	
symmetry at 0.5 x V_{DC}	45% ~ 55% typ. (40% ~ 60% max.)	

Table 1: Frequency Stability Code

stability code	A	B	G	C
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm
-20 °C ~ +70 °C	○	○	○	○
-40 °C ~ +85 °C	○	○	○	○
○ available				

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.

frequency range	V _{DC} = 3.3 V	V _{DC} = 2.5 V	V _{DC} = 1.8 V	load
3.0 ~ 50.0 MHz	18 mA	15 mA	8 mA	30 pF
3.0 ~ 100.0 MHz	17 mA	12 mA	8 mA	15 pF
100.0 ~ 130.0 MHz	20 mA	16 mA	—	15 pF
130.0 ~ 200.0 MHz	25 mA	—	—	15 pF

* a ceramics capacitor of 100nF between pin #2 and pin #4 with short distance wiring is strongly recommended

Table 3: Rise & fall time max.

6 ns: 3.0 ~ 50.0 MHz at 30 pF / 1.8 V	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5 ns: 3.0 ~ 50.0 MHz at 30 pF / 3.3 V & 2.5 V	
4 ns: 3.0 ~ 100.0 MHz at 15 pF / 3.3 V & 2.5 V & 1.8 V	
3 ns: 100.0 ~ 130.0 MHz at 15 pF / 2.5 V & 3.3 V	
2 ns: 130.0 ~ 200.0 MHz at 15 pF / 3.3 V	

Dimensions

pin connection
 # 1: e/d
 # 2: ground
 # 3: output
 # 4: V_{DC}

in mm


Order Information

0	frequency in MHz	type	frequency stability code	supply voltage code	output load code	temp. range	standby function
Oscillator	3.0 ~ 200.0 MHz (3.3 V) 3.0 ~ 130.0 MHz (2.5 V) 3.0 ~ 100.0 MHz (1.8 V)	JPO22	see table 1	3.3 = 3.3 V 2.5 = 2.5 V 1.8 = 1.8 V	1 = 15 pF 2 = 30 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C	STP = stop function TRI = tristate function


Example: O 125.0-JPO22-B-2.5-1-T1-STP-LF (LF = RoHS compliant / Pb free pins or pads)



Taping specification

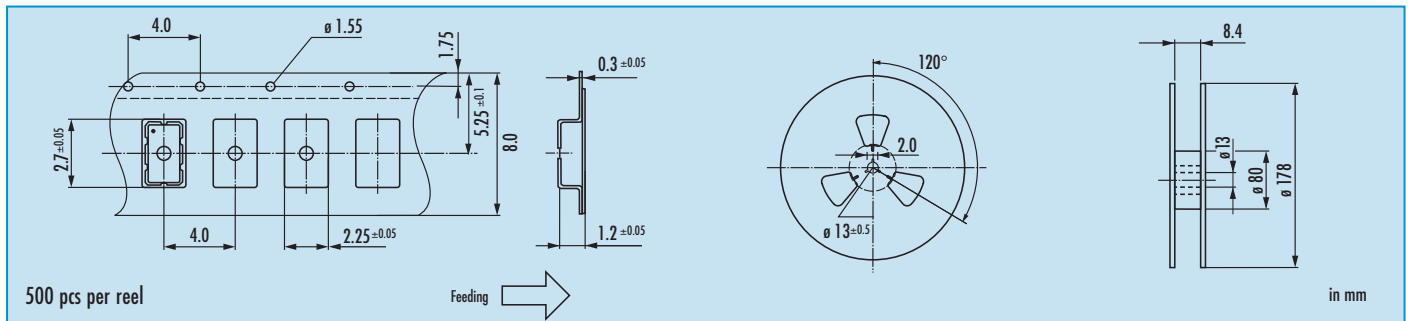

Reflow Soldering Profile

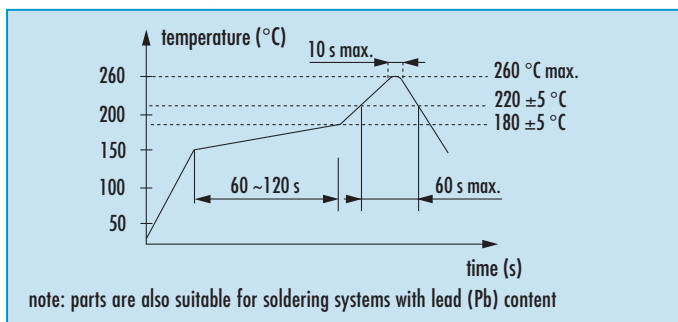

Marking (optional)

JPO / year / month / internal code

date code:

A ~ M: Jan. - Dec.

1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output, STP)	pin #3 (output, TRI)
open	active	active
high "1" ($V_{IH} \geq 0.7 V_{DC}$)	active	active
low "0" ($V_{IL} \leq 0.3 V_{DC}$)	stop, high impedance	high impedance
	stop (STP) function:	tristate (TRI) function:
	• oscillator stops	• oscillator active
	• output high impedance	• output high impedance





actual size

Programmed Oscillator · JPO22 · 3.3/2.5/1.8 V

Programmed SMD CMOS Oscillator · 2.5 x 2.0 mm

- fast delivery service
- tristate or stop function available
- reflow soldering temperature: 260 °C max.
- RoHS compliant, ceramic/metal package



General Data

type	JPO22 3.3 V / 2.5 V / 1.8 V	
frequency range	3.0 ~ 200.0 MHz (3.3 V, 15 pF)	
	3.0 ~ 130.0 MHz (2.5 V, 15 pF)	
	3.0 ~ 100.0 MHz (1.8 V, 15 pF)	
	3.0 ~ 50.0 MHz (3.3 V / 2.5 V / 1.8 V, 30 pF)	
frequency stability over all*	± 25 ppm ~ ± 100 ppm (see table 1)	
current consumption	see table 2	
supply voltage V_{DC}	3.3 V / 2.5 V / 1.8 V ± 10%	
temperature	operating	-20 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15 pF / 30 pF
	current max.	8 mA (3.3 V) / 4 mA (2.5 V) / 2 mA (1.8 V)
	low level max.	0.4 V
	high level min.	V _{DC} - 0.4 V
standby function	tristate (TRI) / stop (STP)	
output enable time max.	100 ns (TRI) / 10 ms (STP)	
output disable time max.	250 ns	
start-up time max.	10 ms	
standby current max.	10 µA (STP version only)	
symmetry at 0.5 x V_{DC}	45% ~ 55% typ. (40% ~ 60% max.)	

Table 1: Frequency Stability Code

stability code	A	B	G	C
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm
-20 °C ~ +70 °C	○	○	○	○
-40 °C ~ +85 °C	○	○	○	○
○ available				

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.

frequency range	V _{DC} = 3.3 V	V _{DC} = 2.5 V	V _{DC} = 1.8 V	load
3.0 ~ 50.0 MHz	18 mA	15 mA	8 mA	30 pF
3.0 ~ 100.0 MHz	17 mA	12 mA	8 mA	15 pF
100.0 ~ 130.0 MHz	20 mA	16 mA	—	15 pF
130.0 ~ 200.0 MHz	25 mA	—	—	15 pF

* a ceramics capacitor of 100nF between pin #2 and pin #4 with short distance wiring is strongly recommended

Table 3: Rise & fall time max.

6 ns: 3.0 ~ 50.0 MHz at 30 pF / 1.8 V	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5 ns: 3.0 ~ 50.0 MHz at 30 pF / 3.3 V & 2.5 V	
4 ns: 3.0 ~ 100.0 MHz at 15 pF / 3.3 V & 2.5 V & 1.8 V	
3 ns: 100.0 ~ 130.0 MHz at 15 pF / 2.5 V & 3.3 V	
2 ns: 130.0 ~ 200.0 MHz at 15 pF / 3.3 V	

Dimensions

pin connection
 # 1: e/d
 # 2: ground
 # 3: output
 # 4: V_{DC}

in mm


Order Information

0	frequency in MHz	type	frequency stability code	supply voltage code	output load code	temp. range	standby function
Oscillator	3.0 ~ 200.0 MHz (3.3 V) 3.0 ~ 130.0 MHz (2.5 V) 3.0 ~ 100.0 MHz (1.8 V)	JPO22	see table 1	3.3 = 3.3 V 2.5 = 2.5 V 1.8 = 1.8 V	1 = 15 pF 2 = 30 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C	STP = stop function TRI = tristate function


Example: O 125.0-JPO22-B-2.5-1-T1-STP-LF (LF = RoHS compliant / Pb free pins or pads)



Taping specification

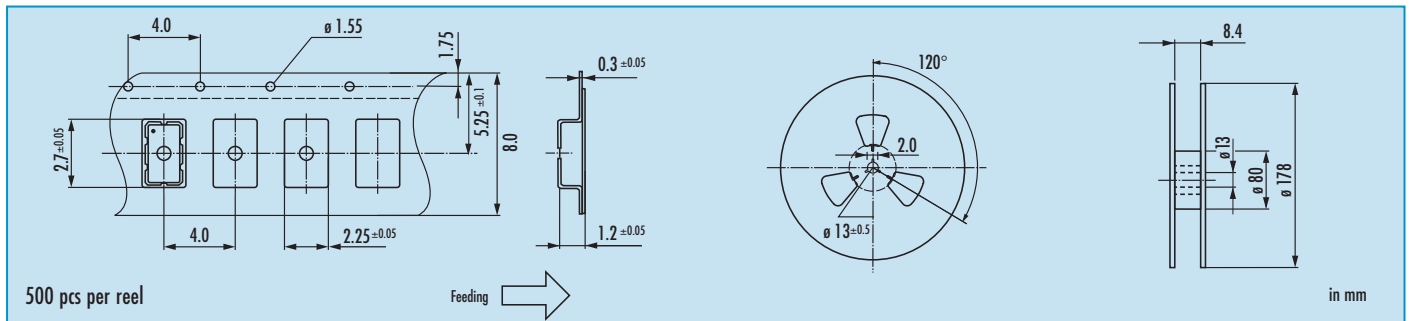

Reflow Soldering Profile

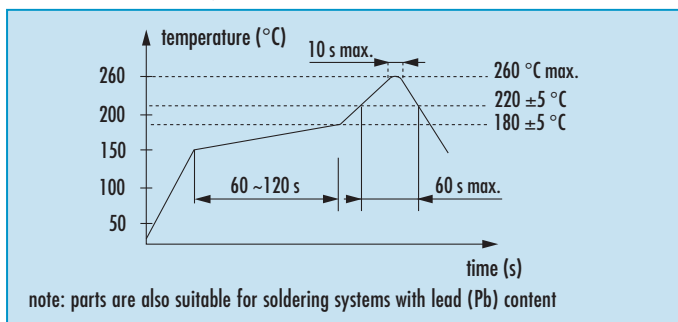

Marking (optional)

JPO / year / month / internal code

date code:

A ~ M: Jan. - Dec.

1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output, STP)	pin #3 (output, TRI)
open	active	active
high "1" ($V_{IH} \geq 0.7 V_{DC}$)	active	active
low "0" ($V_{IL} \leq 0.3 V_{DC}$)	stop, high impedance	high impedance
	stop (STP) function: • oscillator stops • output high impedance	tristate (TRI) function: • oscillator active • output high impedance





actual size

Programmed Oscillator · JPO22 · 3.3/2.5/1.8 V

Programmed SMD CMOS Oscillator · 2.5 x 2.0 mm

- fast delivery service
- tristate or stop function available
- reflow soldering temperature: 260 °C max.
- RoHS compliant, ceramic/metal package



General Data

type	JPO22 3.3 V / 2.5 V / 1.8 V	
frequency range	3.0 ~ 200.0 MHz (3.3 V, 15 pF)	
	3.0 ~ 130.0 MHz (2.5 V, 15 pF)	
	3.0 ~ 100.0 MHz (1.8 V, 15 pF)	
	3.0 ~ 50.0 MHz (3.3 V / 2.5 V / 1.8 V, 30 pF)	
frequency stability over all*	± 25 ppm ~ ± 100 ppm (see table 1)	
current consumption	see table 2	
supply voltage V_{DC}	3.3 V / 2.5 V / 1.8 V ± 10%	
temperature	operating	-20 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15 pF / 30 pF
	current max.	8 mA (3.3 V) / 4 mA (2.5 V) / 2 mA (1.8 V)
	low level max.	0.4 V
	high level min.	V _{DC} - 0.4 V
standby function	tristate (TRI) / stop (STP)	
output enable time max.	100 ns (TRI) / 10 ms (STP)	
output disable time max.	250 ns	
start-up time max.	10 ms	
standby current max.	10 µA (STP version only)	
symmetry at 0.5 x V_{DC}	45% ~ 55% typ. (40% ~ 60% max.)	

Table 1: Frequency Stability Code

stability code	A	B	G	C
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm
-20 °C ~ +70 °C	○	○	○	○
-40 °C ~ +85 °C	○	○	○	○
○ available				

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.

frequency range	V _{DC} = 3.3 V	V _{DC} = 2.5 V	V _{DC} = 1.8 V	load
3.0 ~ 50.0 MHz	18 mA	15 mA	8 mA	30 pF
3.0 ~ 100.0 MHz	17 mA	12 mA	8 mA	15 pF
100.0 ~ 130.0 MHz	20 mA	16 mA	—	15 pF
130.0 ~ 200.0 MHz	25 mA	—	—	15 pF

* a ceramics capacitor of 100nF between pin #2 and pin #4 with short distance wiring is strongly recommended

Table 3: Rise & fall time max.

6 ns: 3.0 ~ 50.0 MHz at 30 pF / 1.8 V	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5 ns: 3.0 ~ 50.0 MHz at 30 pF / 3.3 V & 2.5 V	
4 ns: 3.0 ~ 100.0 MHz at 15 pF / 3.3 V & 2.5 V & 1.8 V	
3 ns: 100.0 ~ 130.0 MHz at 15 pF / 2.5 V & 3.3 V	
2 ns: 130.0 ~ 200.0 MHz at 15 pF / 3.3 V	

Dimensions

pin connection
 # 1: e/d
 # 2: ground
 # 3: output
 # 4: V_{DC}

in mm


Order Information

0	frequency in MHz	type	frequency stability code	supply voltage code	output load code	temp. range	standby function
Oscillator	3.0 ~ 200.0 MHz (3.3 V) 3.0 ~ 130.0 MHz (2.5 V) 3.0 ~ 100.0 MHz (1.8 V)	JPO22	see table 1	3.3 = 3.3 V 2.5 = 2.5 V 1.8 = 1.8 V	1 = 15 pF 2 = 30 pF	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C	STP = stop function TRI = tristate function


Example: O 125.0-JPO22-B-2.5-1-T1-STP-LF (LF = RoHS compliant / Pb free pins or pads)



Taping specification

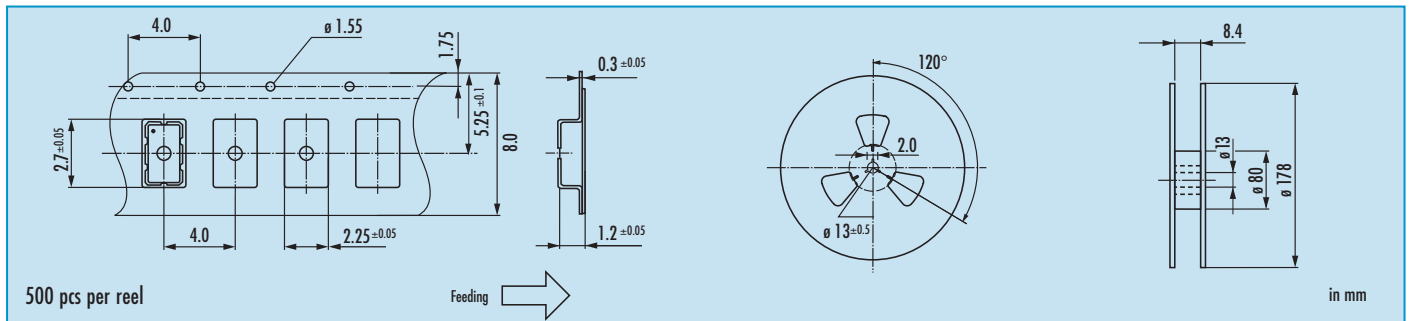

Reflow Soldering Profile

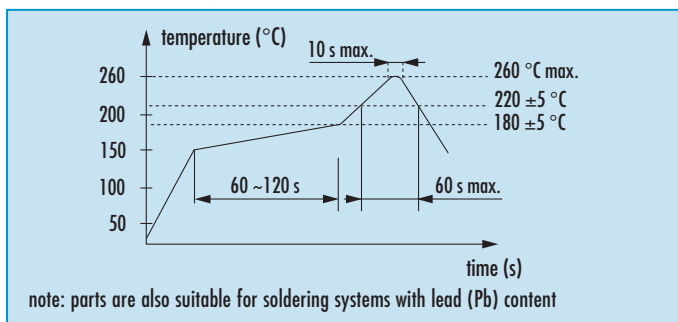

Marking (optional)

JPO / year / month / internal code

date code:

A ~ M: Jan. - Dec.

1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output, STP)	pin #3 (output, TRI)
open	active	active
high "1" ($V_{IH} \geq 0.7 V_{DC}$)	active	active
low "0" ($V_{IL} \leq 0.3 V_{DC}$)	stop, high impedance	high impedance
	stop (STP) function: • oscillator stops • output high impedance	tristate (TRI) function: • oscillator active • output high impedance





actual size

Oscillator · VCXO · 5.0 V

SMD Voltage Control Crystal Oscillator · 7.5 x 5.0 mm

- two pinout versions available
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JV75 5.0 V	
frequency range	1.0 ~ 80.0 MHz	
frequency stability over all*	± 25ppm* / ± 50ppm	
	see table 1	
current consumption	see table 2	
supply voltage V _{DC}	5.0 V ± 5%	
frequency pulling range min.	± 50ppm / ± 100ppm / ± 150ppm [^]	
pulling control voltage	2.5 V ± 2.0 V [*]	
pulling linearity	<10%	
temperature	operating	-10 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15pF
	current max.	8mA
	low level max.	0.1 x V _{DC}
	high level min.	0.9 x V _{DC}
standby function	yes	
start-up time max.	10ms	
symmetry at 0.5 x V _{DC}	45% ~ 55% max.	

Table 1: Frequency Stability Code

stability code	B ± 50 ppm	C ± 25 ppm				
-10 °C ~ +70 °C	○	○				
-40 °C ~ +85 °C	○	○				

● standard ○ available

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.

Current at 15pF load:	
1.0 ~ 17.9 MHz	20 mA
18.0 ~ 35.9 MHz	30 mA
36.0 ~ 51.9 MHz	40 mA
52.0 ~ 80.0 MHz	50 mA

Table 3: Rise & Fall Time max.

5.0 ns:	1.0 ~ 39.9 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
4.0 ns:	40.0 ~ 80.0 MHz	

Recommendation

To avoid phase noise or FM modulation in the output frequency spectrum, we recommend to feed the Vcontrol input pin by a low source impedance.

* not available > 52.0 MHz [^] on request, if < 52.0 MHz

Dimensions

top view

side view

bottom view

pad layout

<p>standard pin connection B</p> <p># 1: Vcontrol # 2: e/d # 3: ground # 4: output # 5: nc # 6: VDD</p>	<p>optional pin connection A</p> <p># 1: Vcontrol # 2: nc # 3: ground # 4: output # 5: e/d # 6: VDD</p>
--	--

in mm

Order Information

0	frequency in MHz	type	frequency stability in ppm	supply voltage in Volt	pulling range in ppm	pin version	option
Oscillator	1.0 ~ 80.0 MHz	JV75	C = ± 25 ppm B = ± 50 ppm	5.0 = 5.0 V	05 = ±50 ppm 10 = ±100 ppm 15 = ±150 ppm*	B = standard A = optional	blank = -10°C ~ +70°C T1 = -40°C ~ +85°C


* on request, if < 52.0 MHz

Example: O 20.0-JV75-B-5.0-10-B (LF = RoHS compliant / Pb free pins or pads)




Oscillator · VCXO · JV75 · 5.0 V

Taping Specification

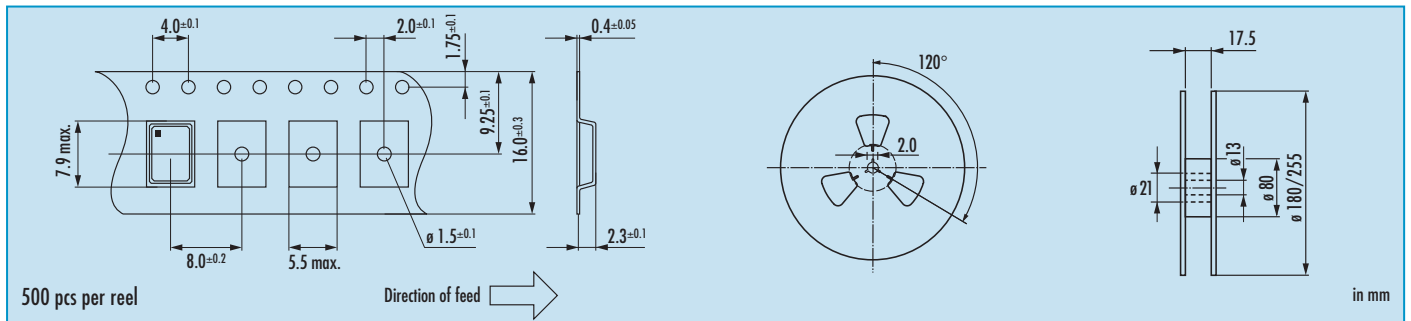

Reflow Soldering Profile

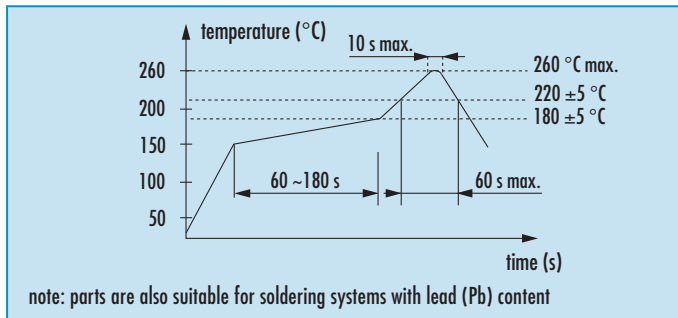


Marking

frequency
type / date code

date code:
A ~ M: Jan. - Dec.
9: 2009
0: 2010
1: 2011

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Control Voltage Characteristic

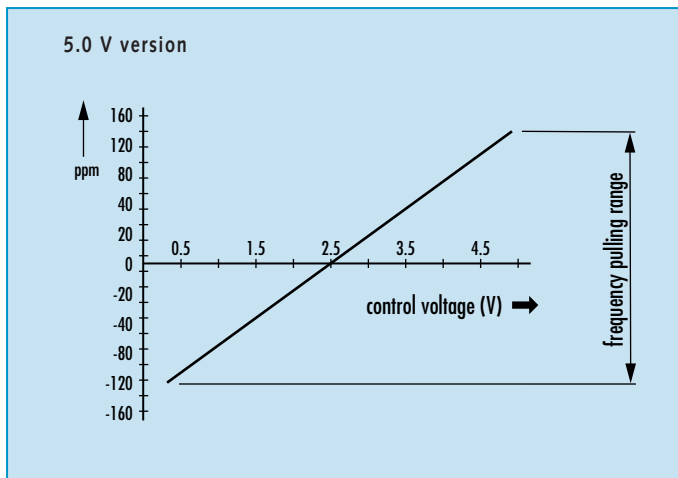

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Enable / Disable Function

pin #2/#5	pin #4
open or high	oscillation
gnd or low	high impedance





actual size

Oscillator · VCXO · 3.3 V

SMD Voltage Control Crystal Oscillator · 7.5 x 5.0 mm

- two pinout versions available
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type		JV75 3.3 V
frequency range		1.0 ~ 125.0 MHz
frequency stability over all*		± 25ppm* / ± 50ppm
		see table 1
current consumption		see table 2
supply voltage V _{DC}		3.3 V ± 10%
frequency pulling range min.		± 50ppm / ± 100ppm [▲] / ± 150ppm [♯]
pulling control voltage		1.65 V ± 1.65 V [■]
pulling linearity max.		± 10%
temperature	operating	-10 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-40 °C ~ +85 °C
output	rise & fall time	see table 3
	load max.	15pF
	current max.	4mA
	low level max.	0.1 x V _{DC}
	high level min.	0.9 x V _{DC}
standby function		yes
start-up time max.		10ms
symmetry at 0.5 x V _{DC}		45% ~ 55% typ. (40% ~ 60% max.)

Table 1: Frequency Stability Code

stability code	B	C			
	± 50 ppm	± 25 ppm			
-10 °C ~ +70 °C	○	○			
-40 °C ~ +85 °C	○	○			

● standard ○ available

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.

Current at 15pF load:	
1.0 ~ 29.9 MHz	15 mA
30.0 ~ 44.9 MHz	20 mA
45.0 ~ 51.9 MHz	25 mA
52.0 ~ 125.0 MHz	35 mA

Table 3: Rise & Fall Time max.

6.0 ns:	1.0 ~ 39.9 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5.0 ns:	40.0 ~ 125.0 MHz	

Recommendation

To avoid phase noise or FM modulation in the output frequency spectrum, we recommend to feed the Vcontrol input pin by a low source impedance.

*not available > 52.0 MHz ▲not available > 80.0 MHz ♯on request, if < 52.0 MHz

Dimensions

top view

side view

bottom view

pad layout

<p>standard pin connection B</p> <ul style="list-style-type: none"> # 1: Vcontrol # 2: e/d # 3: ground # 4: output # 5: nc # 6: VDD 	<p>optional pin connection A</p> <ul style="list-style-type: none"> # 1: Vcontrol # 2: nc # 3: ground # 4: output # 5: e/d # 6: VDD
--	--

in mm

Order Information

0	frequency in MHz	type	frequency stability in ppm	supply voltage in Volt	pulling range in ppm	pin version	option
Oscillator	1.0 ~ 125.0 MHz	JV75	C = ± 25 ppm* B = ± 50 ppm	3.3 = 3.3 V	05 = ±50 ppm 10 = ±100 ppm [▲] 15 = ±150 ppm [♯]	B = standard A = optional	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C


*not available > 52.0 MHz ▲not available > 80.0 MHz
♯on request, if < 52.0 MHz

Example: O 20.0-JV75-C-3.3-10-B (LF = RoHS compliant / Pb free pins or pads)




Oscillator · VCXO · JV75 · 3.3 V

Taping Specification

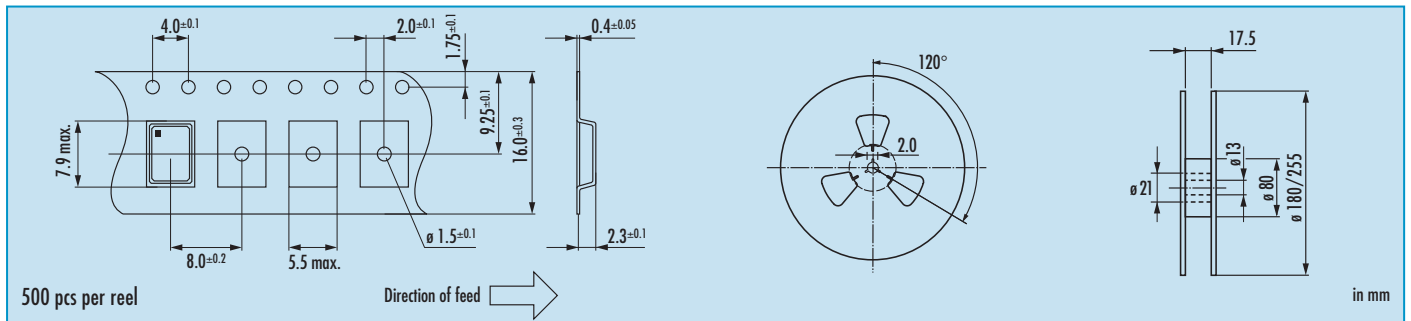

Reflow Soldering Profile

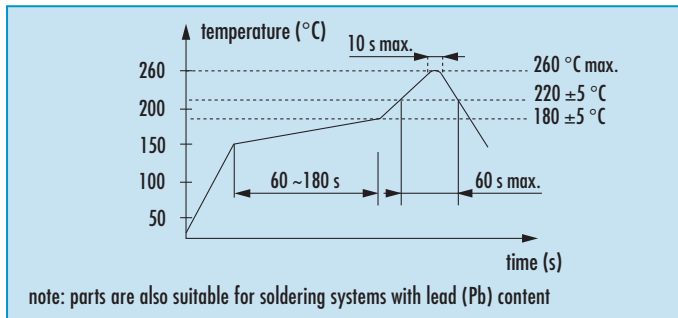


Marking

frequency
type / date code

date code:
A ~ M: Jan. - Dec.
9: 2009
0: 2010
1: 2011

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Control Voltage Characteristic

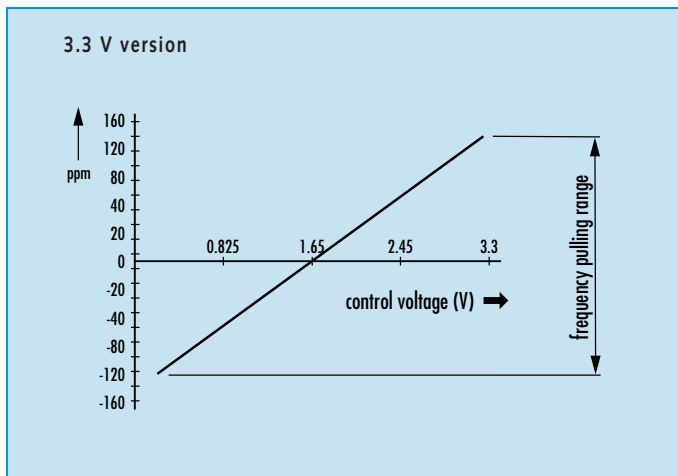

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Enable / Disable Function

pin #2/#5	pin #4
open or $\geq 0.7 V_{DC}$	enable
gnd or $\geq 0.3 V_{DC}$	high impedance





actual size

Oscillator · VCXO · JV53 · 3.3 V

SMD Voltage Control Crystal Oscillator · 5.0 x 3.2 mm

- pulling range up to ± 100 ppm min.
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JV53 3.3 V	
frequency range	2.0 ~ 54.0 MHz	
frequency stability over all*	± 25 ppm / ± 30 ppm / ± 50 ppm	
	see table 1	
current consumption	see table 2	
supply voltage V_{DC}	3.3 V $\pm 10\%$	
frequency pulling range min.	± 100 ppm (± 150 ppm typ.)	
pulling	control voltage	1.65 V ± 1.35 V ^m
	linearity	<10%
	input imp. min.	100 K Ω
	modulation min.	20 KHz
temperature	operating	-20 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15pF
	current max.	4 mA
	low level max.	0.1 x V_{DC}
	high level min.	0.9 x V_{DC}
standby function	no	
start-up time max.	10 ms	
symmetry at 0.5 x V_{DC}	45% ~ 55% max.	

Table 1: Frequency Stability Code

stability code	B ± 50 ppm	G ± 30 ppm	C ± 25 ppm			
-20 °C ~ +70 °C	○	○	○			
-40 °C ~ +85 °C	○	○				

● standard ○ available

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.

Current at 15pF load:	
2.0 ~ 19.9 MHz	10 mA
20.0 ~ 29.9 MHz	15 mA
30.0 ~ 39.9 MHz	20 mA
40.0 ~ 54.0 MHz	25 mA

Table 3: Rise & Fall Time max.


6.0 ns: > 10.0 MHz	note: - specific data on request - rise time: 0.1 V_{DC} ~ 0.9 V_{DC} - fall time: 0.9 V_{DC} ~ 0.1 V_{DC}
10.0 ns: < 10.0 MHz	

Recommendation

To avoid phase noise or FM modulation in the output frequency spectrum, we recommend to feed the Vcontrol input pin by a low source impedance.

For supply voltage noise reduction, connect a capacitor close to the oscillator's supply voltage pins.

Dimensions

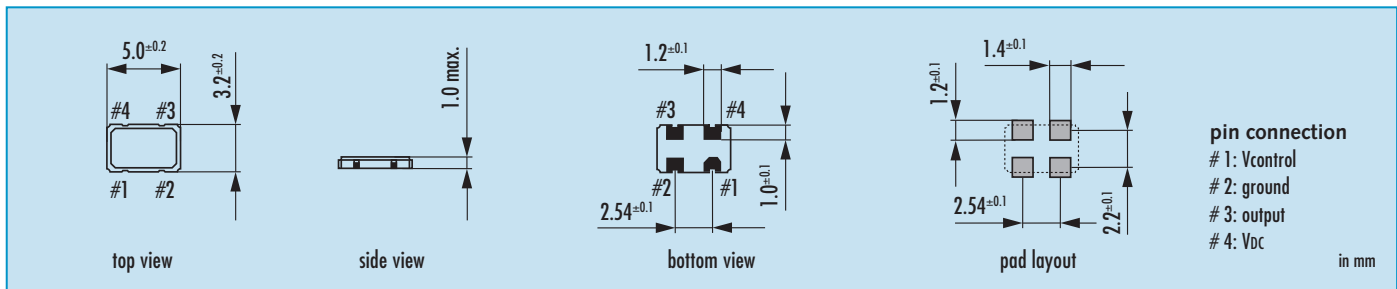

Order Information


0	frequency in MHz	type	frequency stability in ppm	supply voltage in Volt	pulling range in ppm	option
Oscillator	2.0 ~ 54.0 MHz	JV53	C = ± 25 ppm G = ± 30 ppm B = ± 50 ppm	3.3 = 3.3 V	10 = ± 100 ppm	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C on request

Example: O 27.0-JV53-B-3.3-10-LF (Suffix LF = RoHS compliant / Pb free pins or pads)




Oscillator · VCXO · JV53 · 3.3 V

Taping Specification

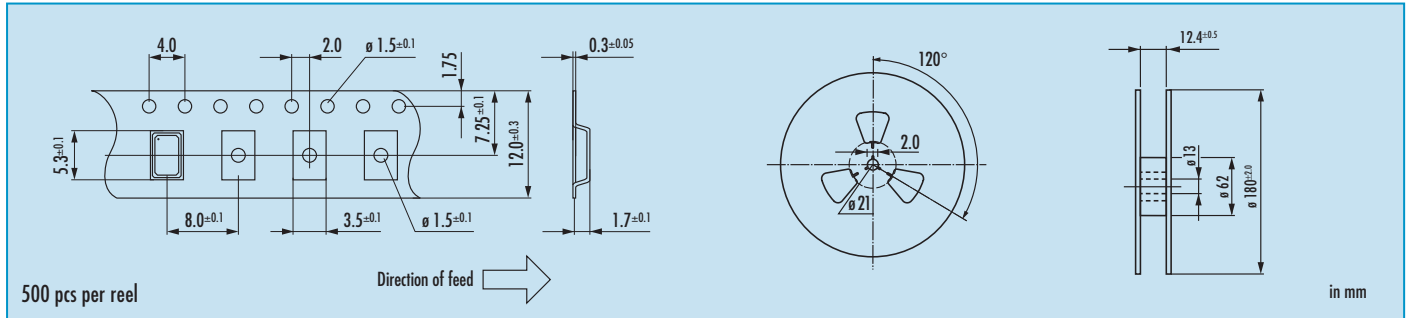

Reflow Soldering Profile

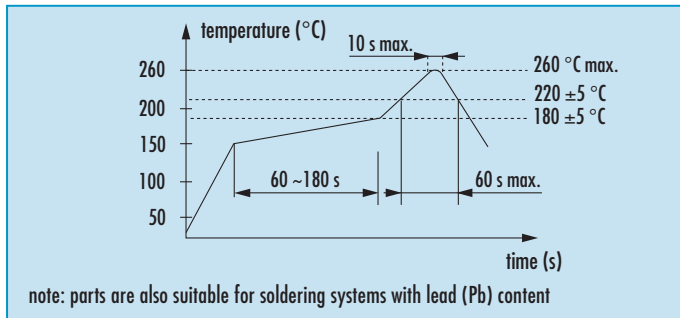


Marking

frequency
type / date code

date code:
A ~ M: Jan. - Dec.
0: 2010 3: 2013
1: 2011 4: 2014
2: 2012 5: 2015

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Control Voltage Characteristic

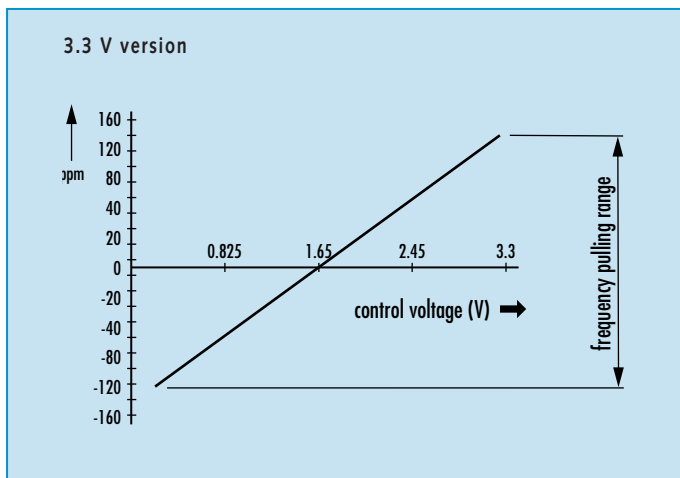

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · (VC)TCXO · JT75(V)

Temp. Compensated Crystal Oscillator · 7.0 x 5.0 mm

- low power VCTCXO or TCXO
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type		JT75 / JT75V
frequency range		10.0 ~ 26.0 MHz
frequency stability	at +25 °C	± 0.5 ppm
	temperature	± 1 ppm ~ ± 2.5 ppm (table 1)
	aging first year	± 1 ppm
	supply voltage	± 0.2 ppm (at V _{DC} ± 5%)
	load change	± 0.2 ppm
current consumption max.		2.0 mA max.
supply voltage V _{DC}		2.8 / 3.0 / 3.3 / 5.0 V (± 5%)
temperature	operating	see table 1
	storage	-40 °C ~ +85 °C
output	load nom.	10 KΩ // 10 pF
	level min.	0.8 V _{pp} (clipped sine)
external tuning range JT75 V		± 8 ppm min.
external tuning voltage		1.5 V ± 1.0 V
start-up time max.		2.5 ms
phase noise	at 100Hz	-110 dBc/Hz
	at fo	-125 dBc/Hz
13 MHz	at 10KHz	-130 dBc/Hz

Table 1: Frequency Stability vs. Temperature

operating temperature code	frequency stability code			
	A	B	C	D
A: -30 °C ~ +80 °C	○	○	○	
B: -20 °C ~ +70 °C	○	○	○	○
C: -10 °C ~ +60 °C	○	○	○	○
D: 0 °C ~ +85 °C	○	○		
E: 0 °C ~ +55 °C	○	○	○	○
F: -10 °C ~ +70 °C	○	○	○	○
G: -30 °C ~ +75 °C	○	○	○	○
H: -20 °C ~ +75 °C	○	○	○	○

● standard ○ on request

Note

- TCXO JT75: pin #1 connected to ground
- VCTCXO JT75V: pin #1 connected to control voltage
- internal AC coupling of output

Dimensions

top view

side view

bottom view

pad layout

TCXO JT75	VCTCXO JT75V
# 1: GND	# 1: Vcontrol
# 2: GND	# 2: GND
# 3: output	# 3: output
# 4: V _{DC}	# 4: V _{DC}
# 5, 6, 7, 8 N.C.	# 5, 6, 7, 8 N.C.

pin connection

in mm

Order Information


0	frequency in MHz	type	frequency stability code	operating temp. code	supply voltage
Oscillator	10.0 ~ 26.0 MHz	JT75 = TCXO JT75V = VCTCXO	A ~ D see table 1	A ~ H see table 1	2.8 = 2.8 V 3.0 = 3.0 V 3.3 = 3.3 V 5.0 = 5.0 V

Example: O 13.0-JT75-A-A-3.3-LF (Suffix LF = RoHS compliant / Pb free pads)




Oscillator · (VC)TCXO · JT75(V)

Taping Specification

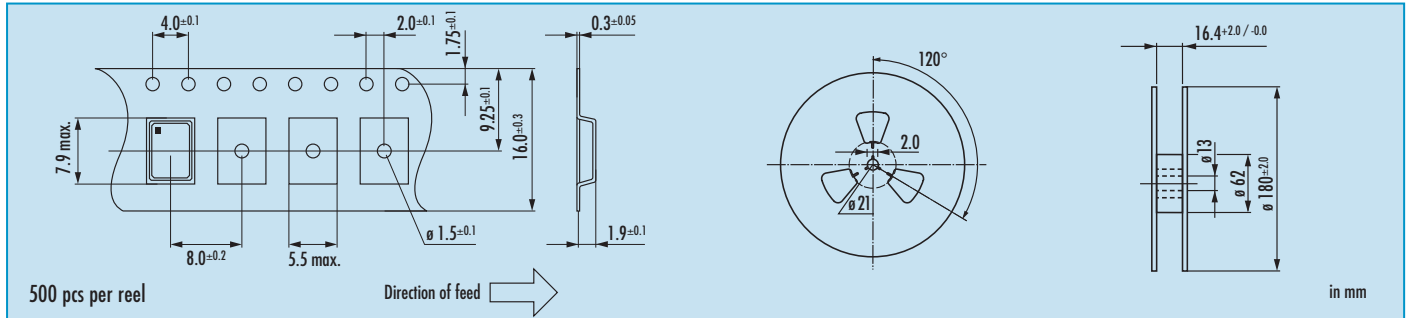

Reflow Soldering Profile

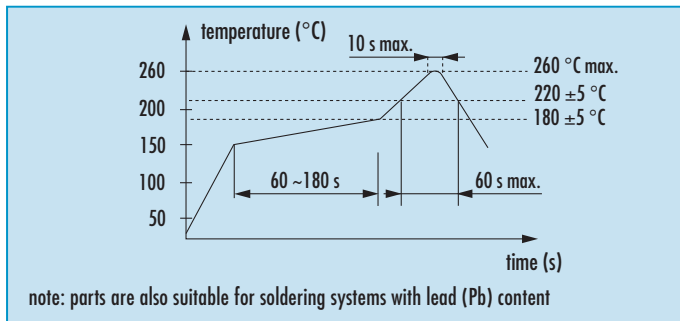

Marking

frequency

company code / stability code / voltage code / date code

date code:

A ~ M: Jan. - Dec.

1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · (VC)TCXO · JT53L(V)

Temp. Compensated Crystal Oscillator · 5.0 x 3.2 mm

- low power VCTCXO or TCXO
- temperature range -40 °C ~ +85 °C available
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type		JT53L / JT53LV
frequency range		6.0 ~ 45.0 MHz
frequency stability	at +25 °C	± 0.5ppm
	temperature	± 1ppm ~ ± 5ppm (table 1)
	aging first year	± 1ppm
	supply voltage	± 0.2ppm (at V _{DC} ± 5%)
	load change	± 0.2ppm
current consumption max.		2.5mA max.
supply voltage V _{DC}		2.5 V (± 4%) and 2.8 V / 3.0 V / 3.3 V / 5.0 V (± 5%)
temperature	operating	see table 1
	storage	-45 °C ~ +85 °C
output	load nom.	10KΩ // 10pF
	level min.	0.8Vpp (clipped sine)
external tuning range JT53LV		± 8ppm min.
external tuning voltage		1.5 V ± 1.0 V
start-up time max.		2.5 ms
phase noise	at 100Hz	-113 dBc/Hz
	at f _o	-135 dBc/Hz
13 MHz	at 10KHz	-140 dBc/Hz

Table 1: Frequency Stability vs. Temperature

operating temperature code	frequency stability code					
	Y	Z	A	B	C	D
± 5.0 ppm	± 3.0 ppm	± 2.5 ppm	± 2.0 ppm	± 1.5 ppm	± 1.0 ppm	
A: -30 °C ~ +80 °C	○	○	○	○	○	○
B: -20 °C ~ +70 °C	○	○	○	○	○	○
C: -10 °C ~ +60 °C	○	○	○	○	○	○
D: 0 °C ~ +85 °C	○	○	○	○	○	○
E: 0 °C ~ +55 °C	○	○	○	○	○	○
F: -10 °C ~ +70 °C	○	○	○	○	○	○
G: -30 °C ~ +75 °C	○	○	○	○	○	○
H: -20 °C ~ +75 °C	○	○	○	○	○	○
K: -40 °C ~ +85 °C	○	○	○	○	○	○
L: -20 °C ~ +85 °C	○	○	○	○	○	○
M: -30 °C ~ +85 °C	○	○	○	○	○	○

● standard ○ available

Note

- TCXO JT53L: pin #1 connected to ground
- VCTCXO JT53LV: pin #1 connected to control voltage
- external AC coupling for output recommended

Dimensions

	TCXO JT53L	VCTCXO JT53LV
# 1:	GND	Vcontrol
# 2:	GND	GND
# 3:	output	output
# 4:	Vdc	Vdc

in mm

Order Information


0	frequency in MHz	type	frequency stability code	operating temp. code	supply voltage
Oscillator	6.0 ~ 45.0 MHz	JT53L = TCXO JT53LV = VCTCXO	A ~ Z see table 1	A ~ K see table 1	2.5 = 2.5 V ± 4% 2.8 = 2.8 V } ± 5% 3.0 = 3.0 V } 3.3 = 3.3 V } 5.0 = 5.0 V option

Example: O 13.0-JT53L-A-B-3.3 (Suffix LF = RoHS compliant / Pb free pads)




Oscillator · (VC-)TCXO · JT53L(V)

Taping Specification

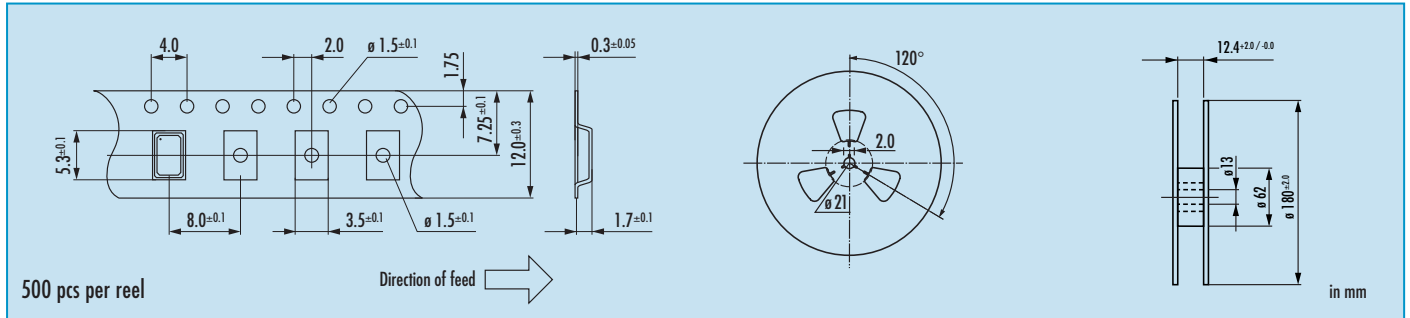

Reflow Soldering Profile

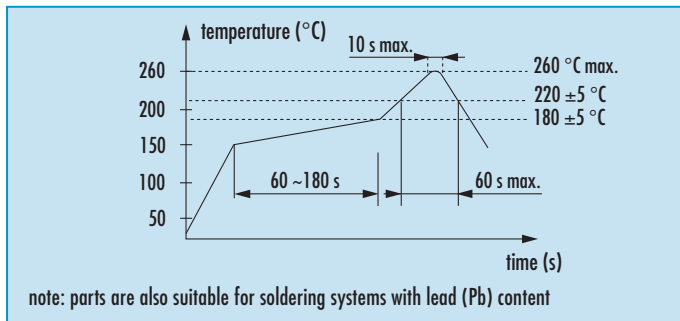

Marking

frequency
company code / date code

date code:
A ~ M: Jan. - Dec.
9: 2009
0: 2010
1: 2011

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · (VC)TCXO · JT33(V)

Temp. Compensated Crystal Oscillator · 3.2 x 2.5 mm

- low power VCTCXO or TCXO
- temperature range -40 °C ~ +85 °C available
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type		JT33 / JT33V	
frequency range		8.0 ~ 52.0 MHz	
frequency	at +25 °C	± 1.5 ppm (incl. 2x reflow)	
	temperature	± 1 ppm ~ ± 5 ppm (table 1)	
tolerance/ stability	aging first year	± 1 ppm	
	supply voltage	± 0.2 ppm (at V _{DC} ± 5%)	
	load change	± 0.2 ppm	
current consumption		2.5 mA max.	
supply voltage V _{DC}		1.8 / 2.5 / 2.8 / 3.0 / 3.3 (± 5%)	
temperature	operating	see table 1	
	storage	-40 °C ~ +85 °C	
output	load nom.	10 KΩ // 10 pF	
	level min.	0.8 V _{pp} (clipped sine)	
external tuning range JT33V		± 8 ppm min.	
external tuning voltage JT33V		0.9 V ± 0.9 V at V _{DC} = 1.8 V (standard) 1.5 V ± 1.0 V at V _{DC} ≥ 2.5 V (standard) 1.4 V ± 1.0 V at V _{DC} ≥ 2.5 V (option)	
start-up time max.		2.5 ms	
phase noise	at 100 Hz	-109 dBc/Hz typ.	
	at f _o	at 1 KHz	-133 dBc/Hz typ.
26 MHz		at 10 KHz	-148 dBc/Hz typ.

Table 1: Frequency Stability vs. Temperature

operating temperature code	frequency stability code					
	Y	Z	A	B	C	D
± 5.0 ppm	± 3.0 ppm	± 2.5 ppm	± 2.0 ppm	± 1.5 ppm	± 1.0 ppm	
A: -30 °C ~ +80 °C	○	○	○	○	○	○
B: -20 °C ~ +70 °C	○	○	○	○	○	○
C: -10 °C ~ +60 °C	○	○	○	○	○	○
D: 0 °C ~ +85 °C	○	○	○	○	○	○
E: 0 °C ~ +55 °C	○	○	○	○	○	○
F: -10 °C ~ +70 °C	○	○	○	○	○	○
G: -30 °C ~ +75 °C	○	○	○	○	○	○
H: -20 °C ~ +75 °C	○	○	○	○	○	○
K: -40 °C ~ +85 °C	○	○	○	○		
L: -20 °C ~ +85 °C	○	○	○	○	○	○
M: -30 °C ~ +85 °C	○	○	○	○		

● standard ○ on request

Note

- TCXO JT33: pin #1 connected to GND
- VCTCXO JT33V: pin #1 is control voltage V_c
- external AC coupling for output recommended

Dimensions

TCXO JT33	VCTCXO JT33V
# 1: GND	# 1: V _{control}
# 2: GND	# 2: GND
# 3: output	# 3: output
# 4: V _{DC}	# 4: V _{DC}

in mm

Order Information


0	frequency in MHz	type	frequency stability code	operating temp. code	supply voltage	control voltage (for JT33V only)
Oscillator	8.0 ~ 45.0 MHz	JT33 = TCXO JT33V = VCTCXO	A - Z see table 1	A - K see table 1	1.8 = 1.8 V 2.5 = 2.5 V 2.8 = 2.8 V 3.0 = 3.0 V 3.3 = 3.3 V	0.9 = V _c 0.9 V ± 0.9 V at V _{DC} = 1.8 V 1.5 = V _c 1.5 V ± 1.0 V at V _{DC} ≥ 2.5 V 1.4 = V _c 1.4 V ± 1.0 V at V _{DC} ≥ 2.5 V see General Data

Example: O 26.0-JT33V-A-G-3.3-1.5-LF (Suffix LF = RoHS compliant / Pb free pads)




Oscillator · (VC-)TCXO · JT33(V)

Taping Specification

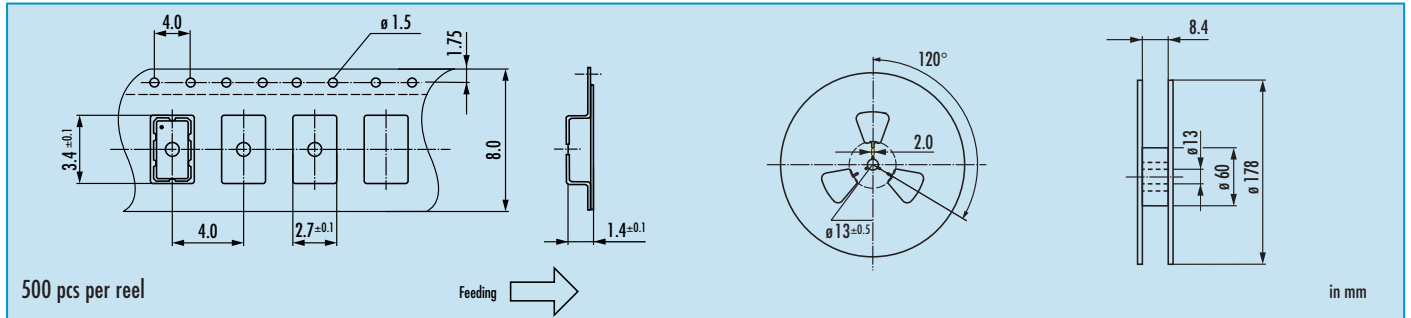

Reflow Soldering Profile

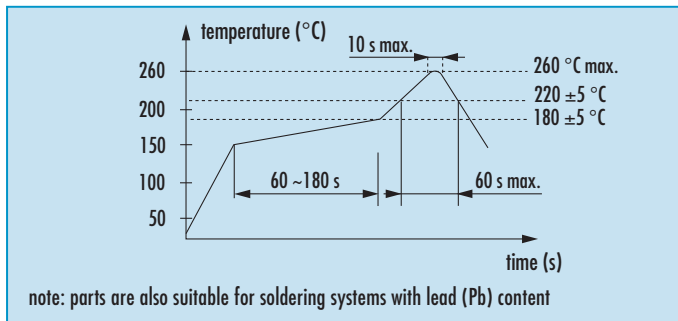

Marking

type / frequency

company code / date code

date code:

A ~ M: Jan. - Dec.

1: 2011 4: 2014

2: 2012 5: 2015

3: 2013 6: 2016

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · TCXO · JT53C

TCXO with HCMOS output · 5.0 x 3.2 mm

- excellent phase noise
- operating temperature range -40 °C ~ +85 °C
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JT53C	
frequency range	4.0 ~ 54.0 MHz	
stability	at +25 °C	± 0.5 ppm
	temperature	± 2.5 ppm (others on request)
	aging first year	± 1.0 ppm
	supply voltage	± 0.2 ppm (at $V_{DC} \pm 5\%$)
	load change	± 0.2 ppm
	after reflow	± 1.0 ppm
current consumption max.	→ see table 1	
supply voltage V_{DC}	2.5 / 2.8 / 3.3 (± 5%)	
temperature	operating	-30 °C ~ +75 °C / -40 °C ~ +85 °C
	storage	-40 °C ~ +125 °C
output	rise & fall time	5.0 ns max.
	load max.	15 pF
	current max.	4.0 mA
	low level max.	0.1 x V_{DC}
	high level min.	0.9 x V_{DC}
harmonics distortion max.	-5.0 dBc	
symmetry at 0.5 x V_{DC}	45% ~ 55% max.	
start-up time max.	10 ms	
standby current max.	10 µA	
output enable time max.	10 ms	
output disable time max.	250 ns	
Jitter 1 σ	3.0 ps	
phase noise at 10 kHz offset	-145 dBc/Hz	

Table 1: Current Consumption max.

	4 ~ 10 MHz	~ 20 MHz	~ 30 MHz	~ 40 MHz	~ 54 MHz
2.5 V	3.1 mA	3.7 mA	4.2 mA	4.6 mA	5.5 mA
2.8 V	3.4 mA	4.1 mA	4.7 mA	5.2 mA	6.0 mA
3.3 V	4.0 mA	4.8 mA	5.5 mA	6.0 mA	7.0 mA

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.7 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.3 V_{DC}$)	high impedance

stop function:

- oscillator stops
- output high impedance

Note

4 user pins (e/d, GND, output, V_{DC})
leave the other pins unconnected!

Dimensions

TCXO
JT53C
1: e/d
2: GND
3: output
4: V_{DC}

pin connection in mm

Order Information


0	frequency in MHz	type	frequency stability code	operating temp. code	supply voltage
Oscillator	4.0 ~ 54.0 MHz	JT53C = TCXO	A = ± 2.5 ppm	G = -30 °C ~ +75 °C K = -40 °C ~ +85 °C	2.5 = 2.5 V 2.8 = 2.8 V 3.3 = 3.3 V

Example: O 16.3680-JT53C-A-K-3.3-LF (Suffix LF = RoHS compliant / Pb free pads)




Oscillator · TCXO · JT53C

Taping Specification

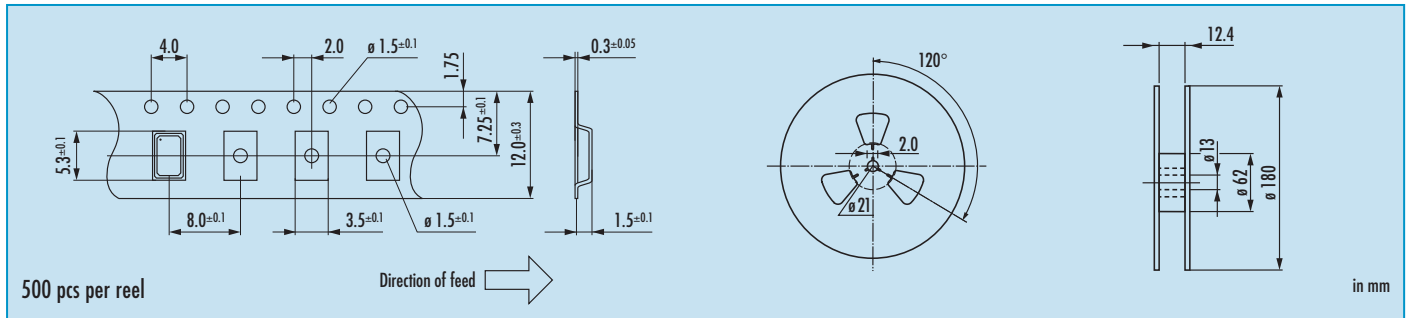

Reflow Soldering Profile

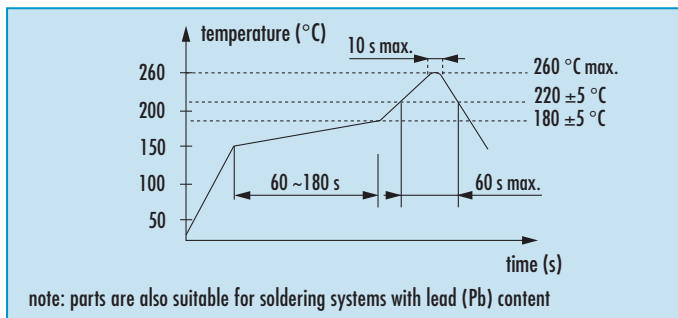

Marking

frequency

company code / stability code / date code (YM)

date code:

A ~ M: Jan. - Dec.

9: 2009 2: 2012

0: 2010 3: 2013

1: 2011 4: 2014

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · TCXO · JT32C

TCXO with HCMOS output · 3.2 x 2.5 mm

- excellent phase noise
- operating temperature range -40 °C ~ +85 °C
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JT32C	
frequency range	4.0 ~ 54.0 MHz	
frequency stability	at +25 °C	± 0.5 ppm
	temperature	± 2.5 ppm (others on request)
	aging first year	± 1.0 ppm
	supply voltage	± 0.2 ppm (at $V_{DC} \pm 5\%$)
	load change	± 0.2 ppm
	after reflow	± 1.0 ppm
current consumption max.	→ see table 1	
supply voltage V_{DC}	2.5 / 2.8 / 3.3 (± 5%)	
temperature	operating	-30 °C ~ +75 °C / -40 °C ~ +85 °C
	storage	-40 °C ~ +125 °C
output	rise & fall time	5.0 ns max.
	load max.	15 pF
	current max.	4.0 mA
	low level max.	0.1 x V_{DC}
	high level min.	0.9 x V_{DC}
harmonics distortion max.	-5.0 dBc	
symmetry at 0.5 x V_{DC}	45% ~ 55% max.	
start-up time max.	10 ms	
standby current max.	10 µA	
output enable time max.	10 ms	
output disable time max.	250 ns	
Jitter 1 σ	3.0 ps	
phase noise at 10 kHz offset	-145 dBc/Hz	

Table 1: Current Consumption max.

	4 ~ 10 MHz	~ 20 MHz	~ 30 MHz	~ 40 MHz	~ 54 MHz
2.5 V	3.1 mA	3.7 mA	4.2 mA	4.6 mA	5.5 mA
2.8 V	3.4 mA	4.1 mA	4.7 mA	5.2 mA	6.0 mA
3.3 V	4.0 mA	4.8 mA	5.5 mA	6.0 mA	7.0 mA

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.7 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.3 V_{DC}$)	high impedance
stop function: <ul style="list-style-type: none"> • oscillator stops • output high impedance 	

Note

4 user pins (e/d, GND, output, V_{DC})
leave the other pins unconnected!

Dimensions

TCXO
JT32C
1: e/d
2: GND
3: output
4: V_{DC}

pin connection in mm

Order Information


0	frequency in MHz	type	frequency stability code	operating temp. code	supply voltage
Oscillator	4.0 ~ 54.0 MHz	JT32C = TCXO	A = ± 2.5 ppm	G = -30 °C ~ +75 °C K = -40 °C ~ +85 °C	2.5 = 2.5 V 2.8 = 2.8 V 3.3 = 3.3 V

Example: O 16.3680-JT32C-A-K-3.3-LF (Suffix LF = RoHS compliant / Pb free pads)




Oscillator · TCXO · JT32C

Taping Specification

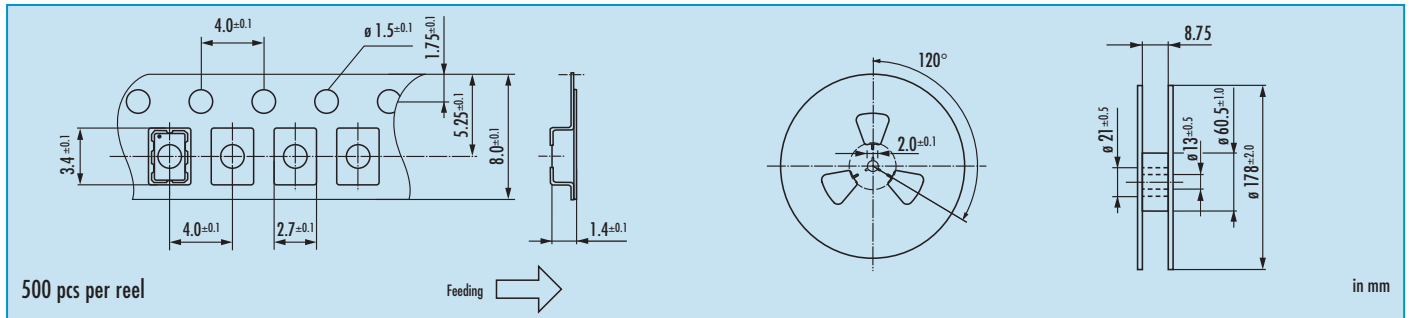

Reflow Soldering Profile

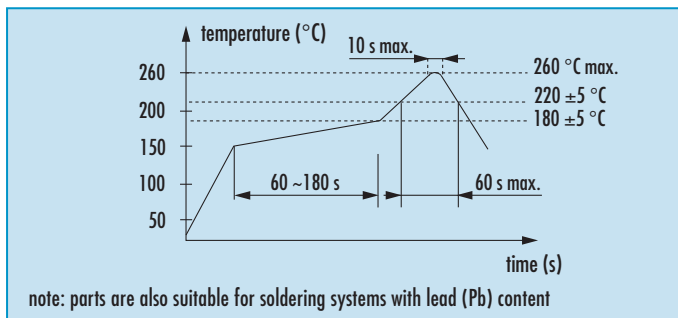

Marking

frequency

company code / stability code / date code (YM)

date code:

A ~ M: Jan. - Dec.

9: 2009 2: 2012

0: 2010 3: 2013

1: 2011 4: 2014

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · TCXO · JT22C

TCXO with HCMOS output · 2.5 x 2.0 mm

- excellent phase noise
- operating temperature range -40 °C ~ +85 °C
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JT22C	
frequency range	4.0 ~ 54.0 MHz	
stability	at +25 °C	± 0.5 ppm
	temperature	± 2.5 ppm (others on request)
	aging first year	± 1.0 ppm
	supply voltage	± 0.2 ppm (at $V_{DC} \pm 5\%$)
	load change	± 0.2 ppm
	after reflow	± 1.0 ppm
current consumption max.	→ see table 1	
supply voltage V_{DC}	2.5 / 2.8 / 3.3 (± 5%)	
temperature	operating	-30 °C ~ +75 °C / -40 °C ~ +85 °C
	storage	-40 °C ~ +125 °C
output	rise & fall time	5.0 ns max.
	load max.	15 pF
	current max.	4.0 mA
	low level max.	0.1 x V_{DC}
	high level min.	0.9 x V_{DC}
harmonics distortion max.	-5.0 dBc	
symmetry at 0.5 x V_{DC}	45% ~ 55% max.	
start-up time max.	10 ms	
standby current max.	10 µA	
output enable time max.	10 ms	
output disable time max.	250 ns	
Jitter 1 σ	3.0 ps	
phase noise at 10 kHz offset	-145 dBc/Hz	

Table 1: Current Consumption max.

	4 ~ 10 MHz	~ 20 MHz	~ 30 MHz	~ 40 MHz	~ 54 MHz
2.5 V	3.1 mA	3.7 mA	4.2 mA	4.6 mA	5.5 mA
2.8 V	3.4 mA	4.1 mA	4.7 mA	5.2 mA	6.0 mA
3.3 V	4.0 mA	4.8 mA	5.5 mA	6.0 mA	7.0 mA

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	active
high "1" ($V_{IH} \geq 0.7 V_{DC}$)	active
low "0" ($V_{IL} \leq 0.3 V_{DC}$)	high impedance

stop function:

- oscillator stops
- output high impedance

Note

4 user pins (e/d, GND, output, V_{DC})
leave the other pins unconnected!

Dimensions

TCXO
JT22C
1: e/d
2: GND
3: output
4: V_{DC}

pin connection in mm

Order Information


0	frequency in MHz	type	frequency stability code	operating temp. code	supply voltage
Oscillator	4.0 ~ 54.0 MHz	JT22C = TCXO	A = ± 2.5 ppm	G = -30 °C ~ +75 °C K = -40 °C ~ +85 °C	2.5 = 2.5 V 2.8 = 2.8 V 3.3 = 3.3 V

Example: O 16.3680-JT22C-A-K-3.3-LF (Suffix LF = RoHS compliant / Pb free pads)




Oscillator · TCXO · JT22C

Taping Specification

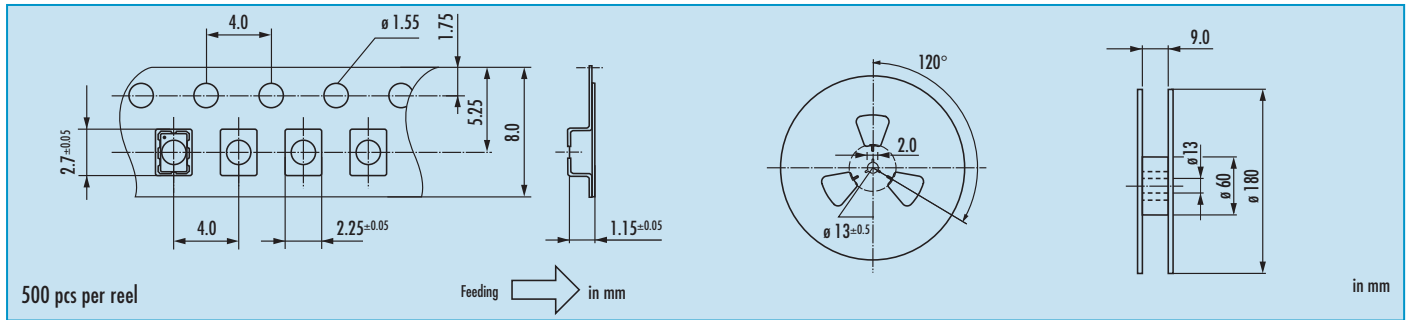

Reflow Soldering Profile

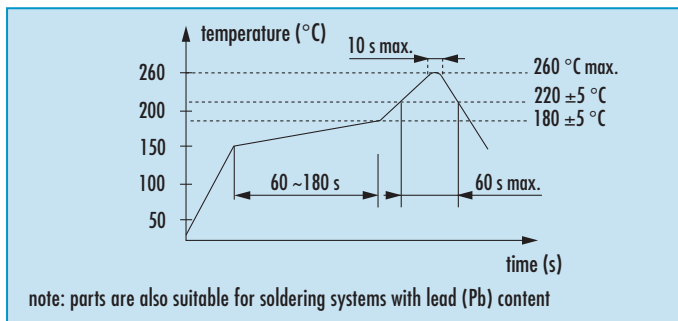

Marking

frequency
company code / stability code / date code (YM)

date code:

A ~ M: Jan. - Dec.

9: 2009 2: 2012

0: 2010 3: 2013

1: 2011 4: 2014

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk





actual size

Oscillator · PECL · JOE75 · 3.3 V

SMD Oscillator Low Voltage PECL · 7.5 x 5.2 mm

- drives fast PECL logic
- complementary output, low EMI
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JOE75 3.3 V
frequency range	40.0 ~ 170.0 MHz
higher frequencies on request	170.0 ~ 270.0 MHz
frequency stability over all*	± 25ppm / ± 50ppm / ± 100ppm see table 1
current consumption	see table 2
supply voltage V _{DC}	3.3 V ± 5%
temperature	operating: -10 °C ~ +70 °C / -40 °C ~ +85 °C storage: -55 °C ~ +125 °C
output	rise & fall time: 1ns (20% ~ 80% of V _{pp}) load nom.: 50Ω at 1.3 V low level max.: 1.7 V high level min.: 2.2 V
output enable time max.	10ms
output disable time max.	200ns
start-up time max.	10ms
standby function	stop
standby current max.	30µA
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS
period jitter	< 5.0ps RMS
symmetry at 50% of V _{pp}	45% ~ 55% max.

Table 1: Frequency Stability Code

stability code	A	B	C			
	± 100 ppm	± 50 ppm	± 25 ppm			
-10 °C ~ +70 °C	○	○	▲			
-40 °C ~ +85 °C	○	○				

● standard ○ available ▲ excludes shock & vibration

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.

Current consumption at nominal load:	
40.0 ~ 170.0 MHz	60 mA
170.0 ~ 270.0 MHz	88 mA

Enable / Disable Function

pin #1 (e/d control)	pin #4 / #5 (outputs)	
open or ≥ 0.7 V _{CC}	enable	
gnd or ≤ 0.3 V _{CC}	high impedance	

Dimensions

pin connection
 # 1: e/d
 # 2: nc
 # 3: ground
 # 4: output 1
 # 5: output 2
 # 6: V_{CC}

in mm

Order Information


0	frequency in MHz	—	type	—	frequency stability code	—	supply voltage in Volt	—	option
Oscillator	40.0 ~ 170.0 MHz > 170 MHz on request		JOE75		see table 1		3.3 = 3.3 V		blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: O 155.520-JOE75-B-3.3-T1-LF (Suffix LF = RoHS compliant / Pb free pins or pads)



Oscillator · PECL · JOE75 · 3.3 V

Taping Specification

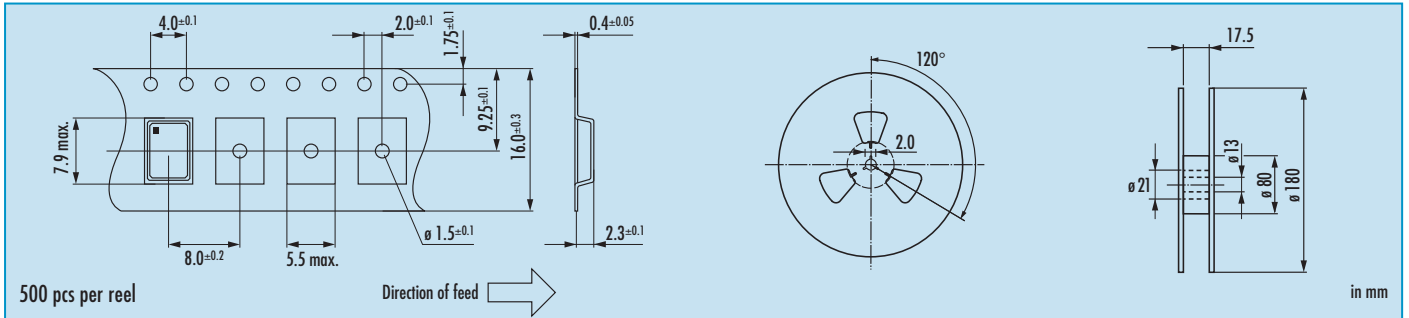

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Marking

type / stability code / voltage code

frequency

company code / date code

date code:

A ~ M: Jan.- Dec.


9: 2009

0: 2010

1: 2011

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Reflow Soldering Profile

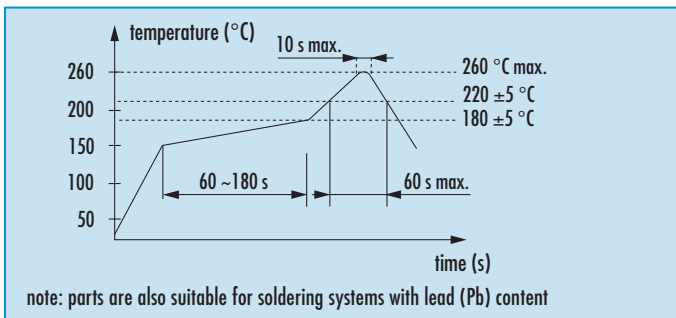



actual size

Oscillator · PECL · JOE75 · 2.5 V

SMD Oscillator Low Voltage PECL · 7.5 x 5.2 mm

- drives fast PECL logic
- complementary output, low EMI
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JOE75 2.5 V
frequency range	40.0 ~ 170.0 MHz
higher frequencies on request	170.0 – 270.0 MHz
frequency stability over all*	± 25 ppm / ± 50 ppm / ± 100 ppm see table 1
current consumption	see table 2
supply voltage V _{DC}	2.5 V ± 5%
temperature	operating: -10 °C ~ +70 °C / -40 °C ~ +85 °C storage: -55 °C ~ +125 °C
output	rise & fall time: 0.7 ns (20% ~ 80% of V _{pp}) load nom.: 50Ω at 0.5 V low level max.: 1.195 V high level min.: 1.415 V
output enable time max.	10 ms
output disable time max.	200 ns
start-up time max.	10 ms
standby function	stop
standby current max.	30 μA
phase jitter 12 kHz ~ 20.0 MHz	< 1.0 ps RMS
period jitter	< 5.0 ps RMS
symmetry at 50% of V _{pp}	45% ~ 55% max.

Table 1: Frequency Stability Code

stability code	A	B	C			
	± 100 ppm	± 50 ppm	± 25 ppm			
-10 °C ~ +70 °C	○	○	▲			
-40 °C ~ +85 °C	○	○				

● standard ○ available ▲ excludes shock & vibration

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Table 2: Current Consumption max.

Current consumption at nominal load:	
40.0 ~ 170.0 MHz	60 mA
170.0 ~ 270.0 MHz	88 mA

Enable / Disable Function

pin #1 (e/d control)	pin #4 / #5 (outputs)	
open or ≥ 0.7 V _{CC}	enable	
gnd or ≤ 0.3 V _{CC}	high impedance	

Dimensions

pin connection
 # 1: e/d
 # 2: nc
 # 3: ground
 # 4: output 1
 # 5: output 2
 # 6: V_{CC}

in mm

Order Information


0	frequency in MHz	type	frequency stability code	supply voltage in Volt	option
Oscillator	40.0 ~ 170.0 MHz > 170 MHz on request	JOE75	see table 1	2.5 = 2.5 V	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C on request

Example: O 155.520-JOE75-B-2.5-T1-LF (Suffix LF = RoHS compliant / Pb free pins or pads)



Oscillator · PECL · JOE75 · 2.5 V


Taping Specification

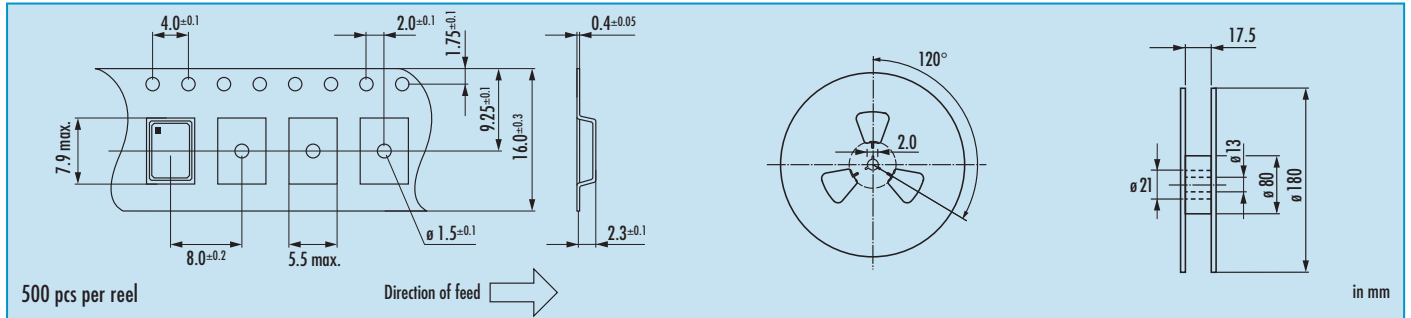

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Reflow Soldering Profile

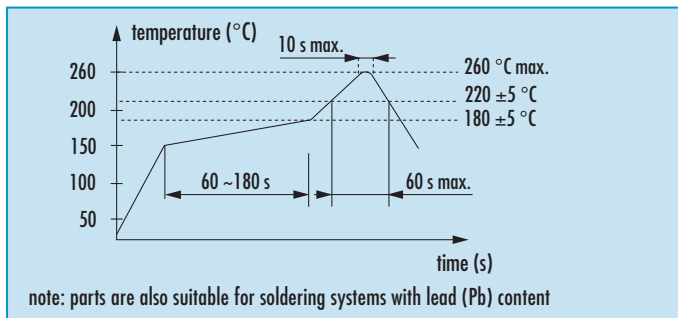

Marking

type / frequency
company code / date code

date code:

A ~ M: Jan. - Dec.

9: 2009

0: 2010

1: 2011

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M





actual size

Oscillator · PECL · VCXO

SMD PECL VCXO · 7.5 x 5.2 mm

- uses quartz crystal in MESA technology
- low phase noise + jitter
- complementary PECL output, low EMI
- ceramic/metal package



General Data

type		JVE75A
frequency range		50.0 ~ 700.0 MHz
frequency stability over all*		± 25ppm / ± 50ppm (see table 1)
frequency pulling range min.		± 80ppm
pulling control voltage		1.65 V ± 1.5 V [■]
pulling control input imped. min.		60 kΩ
current consumption		120mA max.
supply voltage V _{DC}		3.3 V ± 5%
temperature	operating	-10 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-40 °C ~ +85 °C
output	rise & fall time	0.5ns (20% ~ 80% of V _{pp})
	load nom.	50Ω at 1.3 V
	low level max.	1.7 V
	high level min.	2.2 V
standby function		yes
output enable time max.		10ms
output disable time max.		50ns
start-up time max.		10ms
phase jitter 12 kHz ~ 20.0 MHz		< 1.0ps RMS
symmetry at 50% of V _{pp}		45% ~ 55% typ. (40% ± 60% max.)

Table 1: Frequency Stability Code

stability code	B	C			
	± 50 ppm	± 25 ppm			
-10 °C ~ +70 °C	○	○			
-40 °C ~ +85 °C	○				


● standard ○ available

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Enable / Disable Function

pin #2 (e/d control)	pin #4 / #5 (outputs)	
open or ≥ 2.4 V	active	
gnd or ≤ 0.4 V	high impedance	

Control Voltage Characteristic

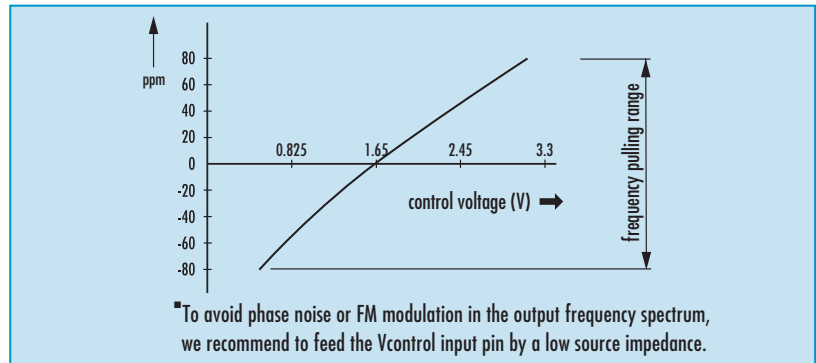

Dimensions

top view

side view

bottom view

pad layout

pin connection

- # 1: V_{control}
- # 2: e/d
- # 3: ground
- # 4: output 1
- # 5: output 2
- # 6: V_{CC}

in mm

Order Information


0	frequency	type	stability at 25 °C in ppm	supply voltage	pulling range in ppm	option
Oscillator	50.0 ~ 700.0 MHz	JVE75A	B = ± 50 ppm C = ± 25 ppm	3.3 = 3.3 V	08 = ± 80 ppm	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: O 155.520-JVE75A-B-3.3-08 (Suffix LF = RoHS compliant / Pb free pins or pads)



Oscillator · PECL · VCXO · JVE75A


Taping Specification

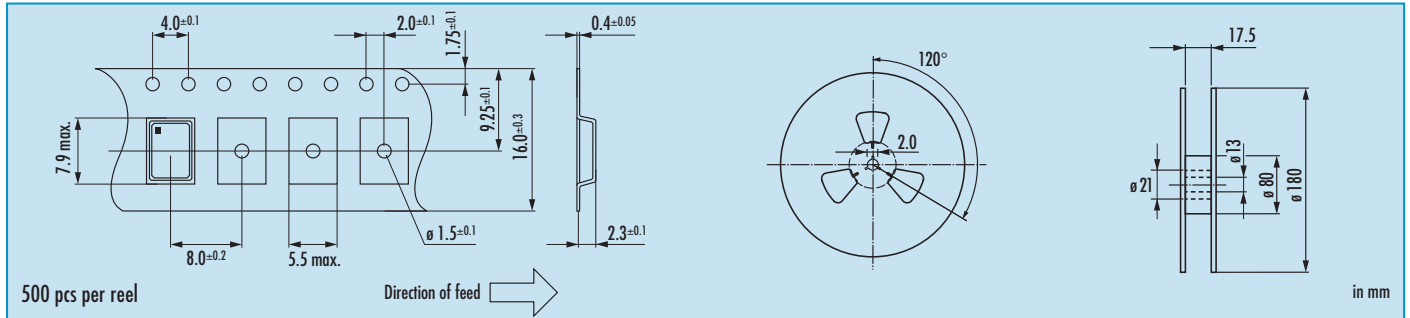

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Reflow Soldering Profile

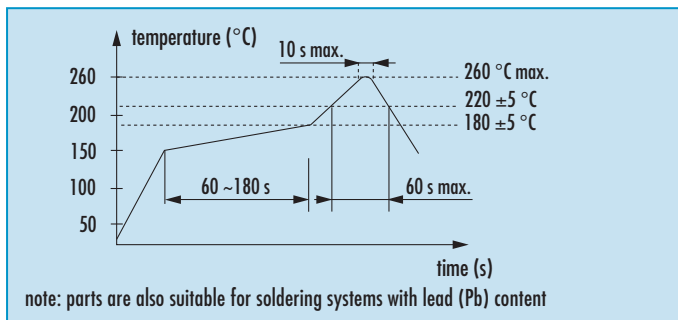

Marking

type / frequency / date code

date code:

A ~ M: Jan. - Dec.

9: 2009

0: 2010

1: 2011

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M





actual size

Oscillator · PECL · VCXO

SMD PECL VCXO · 7.5 x 5.2 mm

- uses quartz crystal at fundamental mode and PLL
- high pulling range ± 150 ppm
- complementary PECL output, low EMI
- ceramic/metal package



General Data

type	JVE75B	
frequency range	12.0 ~ 800.0 MHz	
frequency stability over all*	± 25 ppm / ± 50 ppm (see table 1)	
frequency pulling range min.	± 150 ppm	
pulling control voltage	$1.65 \text{ V} \pm 1.5 \text{ V}^{\text{M}}$	
pulling control input imped. min.	60 k Ω	
current consumption	120mA max.	
supply voltage V_{DC}	$3.3 \text{ V} \pm 5\%$	
temperature	operating	$-10 \text{ }^{\circ}\text{C} \sim +70 \text{ }^{\circ}\text{C}$ / $-40 \text{ }^{\circ}\text{C} \sim +85 \text{ }^{\circ}\text{C}$
	storage	$-40 \text{ }^{\circ}\text{C} \sim +85 \text{ }^{\circ}\text{C}$
output	rise & fall time	1.0ns (20% ~ 80% of V_{pp})*
	load nom.	50 Ω at 1.3 V
	low level max.	1.7 V
	high level min.	2.2 V
standby function	yes	
output enable time max.	10ms	
output disable time max.	50ns	
start-up time max.	10ms	
phase jitter 12 kHz ~ 20.0 MHz	< 5.0ps RMS	
Osymmetry at 50% of V_{pp}	45% ~ 55% typ. (40% \pm 60% max.)	

* 0.5ns, if >100.0 MHz

Table 1: Frequency Stability Code

stability code	B	C				
	± 50 ppm	± 25 ppm				
$-10 \text{ }^{\circ}\text{C} \sim +70 \text{ }^{\circ}\text{C}$	○	○				
$-40 \text{ }^{\circ}\text{C} \sim +85 \text{ }^{\circ}\text{C}$	○					


● standard ○ available

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Enable / Disable Function

pin #2 (e/d control)	pin #4 / #5 (outputs)	
open or $\geq 2.4 \text{ V}$	active	
gnd or $\leq 0.4 \text{ V}$	high impedance	

Control Voltage Characteristic

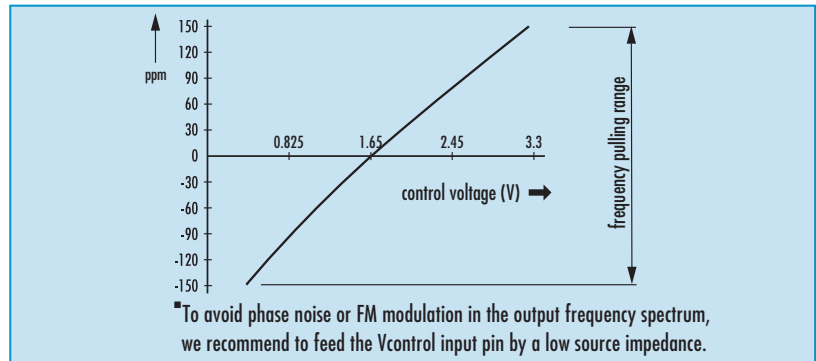

Dimensions

top view

side view

bottom view

pad layout

pin connection

- # 1: Vcontrol
- # 2: e/d
- # 3: ground
- # 4: output 1
- # 5: output 2
- # 6: Vcc

in mm

Order Information


0	frequency	type	stability at 25 °C in ppm	supply voltage	pulling range in ppm	option
Oscillator	12.0 ~ 800.0 MHz	JVE75B	B = ± 50 ppm C = ± 25 ppm	3.3 = 3.3 V	15 = ± 150 ppm	blank = $-10 \text{ }^{\circ}\text{C} \sim +70 \text{ }^{\circ}\text{C}$ T1 = $-40 \text{ }^{\circ}\text{C} \sim +85 \text{ }^{\circ}\text{C}$

Example: O 155.520-JVE75B-B-3.3-15-T1 (Suffix LF = RoHS compliant / Pb free pins or pads)



Oscillator · PECL · VCXO · JVE75B


Taping Specification

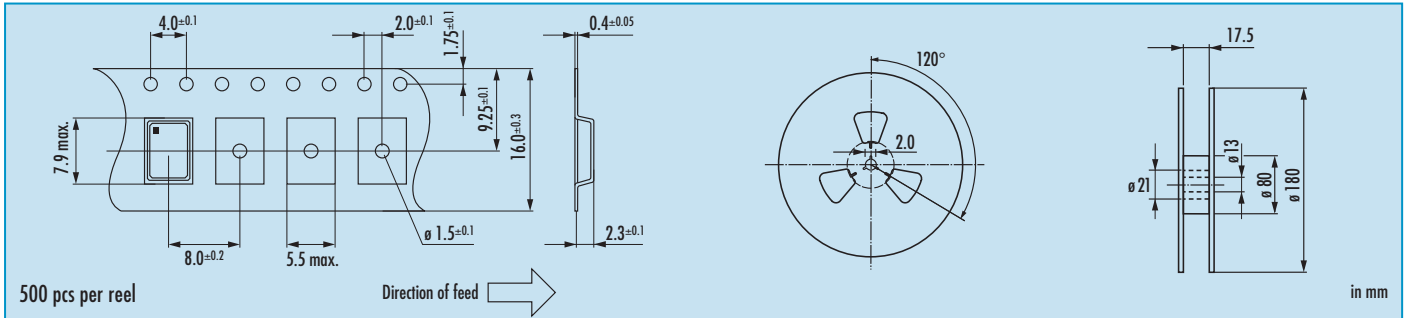

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Reflow Soldering Profile

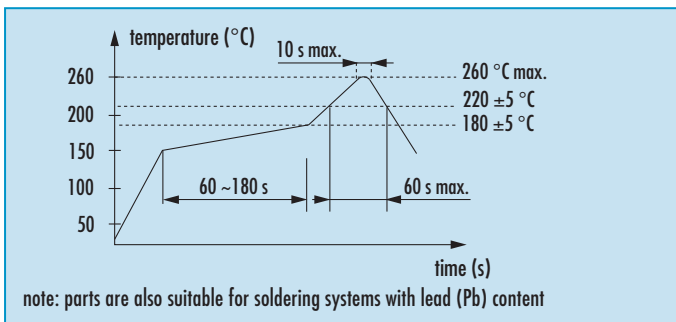

Marking

type / frequency / date code

date code:
 A ~ M: Jan. - Dec.
 9: 2009
 0: 2010
 1: 2011

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M





actual size

Oscillator · LVDS · JOD75

SMD Low Voltage LVDS Oscillator · 7.5 x 5.2 mm

- drives fast LVDS logic
- complementary output, low EMI
- reflow soldering temperature: 260 °C max.
- ceramic/metal package



General Data

type	JOD75 3.3 V & 2.5 V	
frequency range	75.0 ~ 170.0 MHz	
higher frequencies on request	170.0 ~ 270.0 MHz	
frequency stability over all*	± 25 ppm ~ ± 100 ppm see table 1	
current consumption	66mA max.	
supply voltage V _{DC}	3.3 V ± 5% / 2.5 V ± 5%	
temperature	operating	-10 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	0.7ns (20% ~ 80% of V _{pp})
	load nom.	100Ω differential
	swing	0.35V _{p-p} typ. / 0.25V _{p-p} min.
	offset voltage	1.25V ± 0.125V
output enable time max.	10ms	
output disable time max.	200ns	
start-up time max.	10ms	
standby function	stop	
standby current max.	30µA	
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS	
period jitter	< 5.0ps RMS	
symmetry at 50% of V _{pp}	45% ~ 55% max.	

Table 1: Frequency Stability Code

stability code	A	B	C			
	± 100 ppm	± 50 ppm	± 25 ppm			
-10 °C ~ +70 °C	○	○	▲			
-40 °C ~ +85 °C	○	○				


● standard ○ available ▲ excludes shock & vibration

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.


Enable / Disable Function

pin #1 (e/d control)	pin #4 / #5 (outputs)	
open or ≥ 0.7 V _{CC}	enable	
gnd or ≤ 0.3 V _{CC}	high impedance	

Reflow Soldering Profile

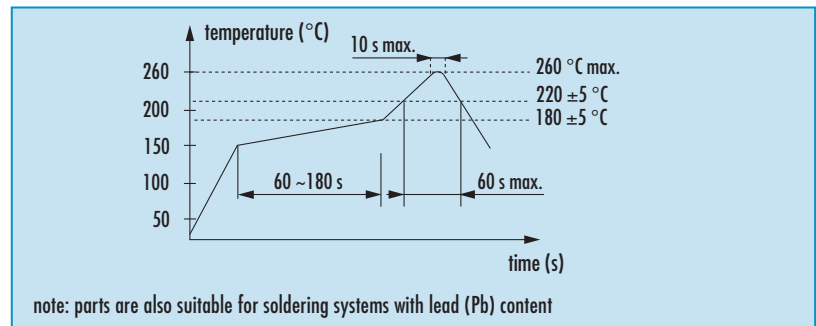

Dimensions

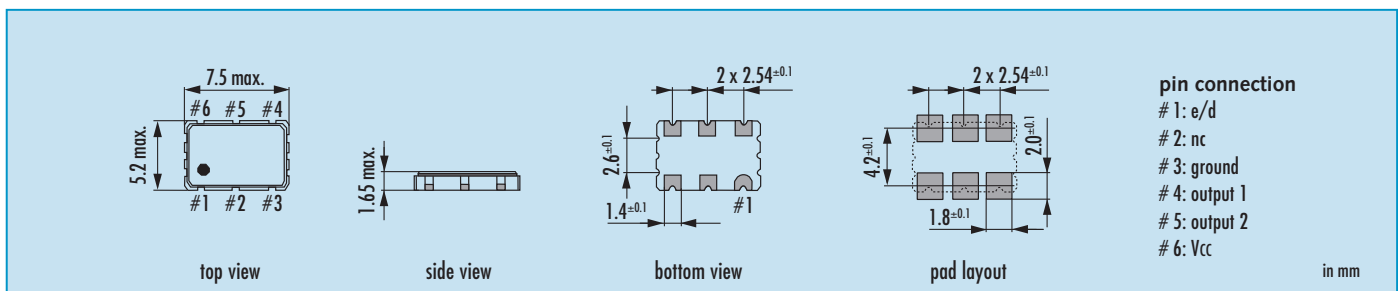

Order Information


0	frequency in MHz	—	type	—	frequency stability code	—	supply voltage in Volt	—	option
Oscillator	75.0 ~ 170.0 MHz >170.0 MHz on request		JOD75		see table 1		3.3 = 3.3 V 2.5 = 2.5 V		blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C on request

Example: O 155.520-JOD75-B-3.3-T1 (Suffix LF = RoHS compliant / Pb free pins or pads)



Oscillator · LVDS · JOD75

Taping Specification

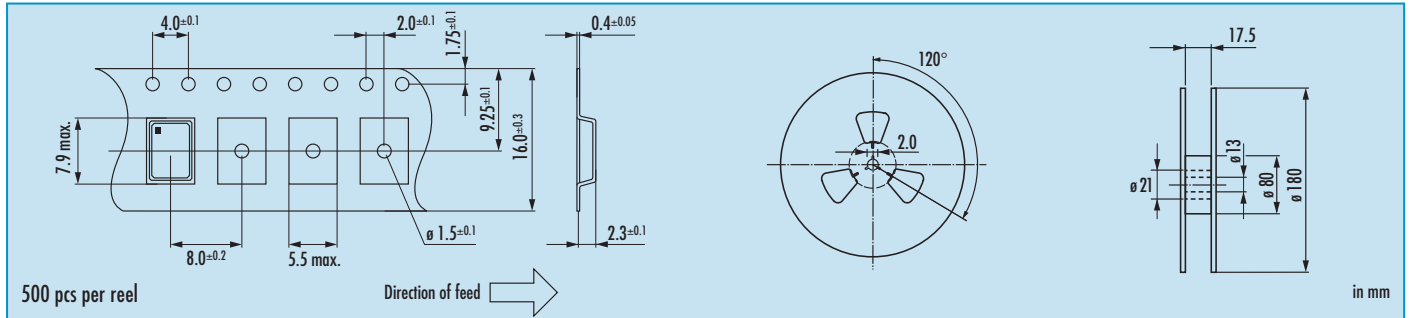

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Marking

type / stability code / voltage code

frequency

company code / date code

date code:

A ~ M: Jan.- Dec.

9: 2009

0: 2010

1: 2011

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M





actual size

Oscillator · LVDS · VCXO

SMD LVDS VCXO · 7.5 x 5.0 mm

- uses quartz crystal in MESA technology
- low phase noise + jitter
- complementary LVDS output, low EMI
- ceramic/metal package



General Data

type	JVD75A	
frequency range	50.0 ~ 700.0 MHz	
frequency stability over all*	± 25ppm / ± 50ppm (see table 1)	
frequency pulling range min.	± 80ppm	
pulling control voltage	1.65 V ± 1.5 V [■]	
pulling control input imp. min.	60 kΩ	
current consumption	80mA max.	
supply voltage V _{DC}	3.3 V ± 5%	
temperature	operating	-10 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-40 °C ~ +85 °C
output	rise & fall time	1.0ns (20% ~ 80% of Vpp)
	load nom.	100Ω differential
	swing min.	0.35Vp-p
	offset voltage	1.25 V ± 0.125V
standby function	yes	
output enable time max.	10ms	
output disable time max.	150ns	
start-up time max.	10ms	
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS	
symmetry at 50% of Vpp	45% ~ 55% typ. (40% ± 60% max.)	

Table 1: Frequency Stability Code

stability code	B	C				
	± 50 ppm	± 25 ppm				
-10 °C ~ +70 °C	○	○				
-40 °C ~ +85 °C	○					


● standard ○ available

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Enable / Disable Function

pin #2 (e/d control)	pin #4 / #5 (outputs)	
open or ≥ 2.4 V	active	
gnd or ≤ 0.4 V	high impedance	

Control Voltage Characteristic

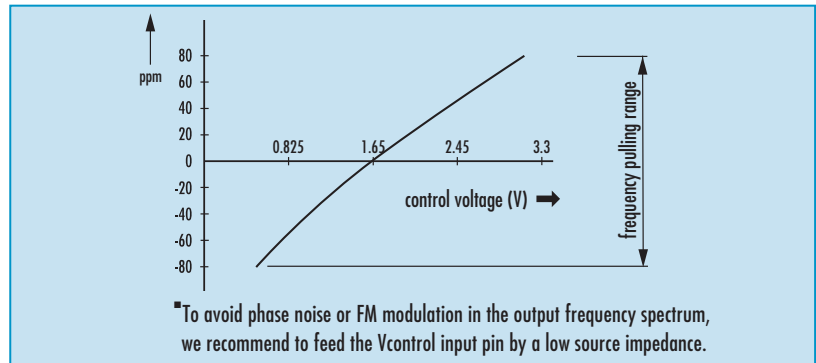

Dimensions

pin connection

- # 1: V_{control}
- # 2: e/d
- # 3: ground
- # 4: output 1
- # 5: output 2
- # 6: V_{CC}

in mm

Order Information


0	frequency	type	stability at 25 °C in ppm	supply voltage	pulling range in ppm	option
Oscillator	50.0 ~ 700.0 MHz	JVD75A	B = ± 50 ppm C = ± 25 ppm	3.3 = 3.3 V	08 = ± 80 ppm	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: O 155.520-JVD75A-B-3.3-08 (Suffix LF = RoHS compliant / Pb free pins or pads)



Oscillator · LVDS · VCXO · JVD75A


Taping Specification

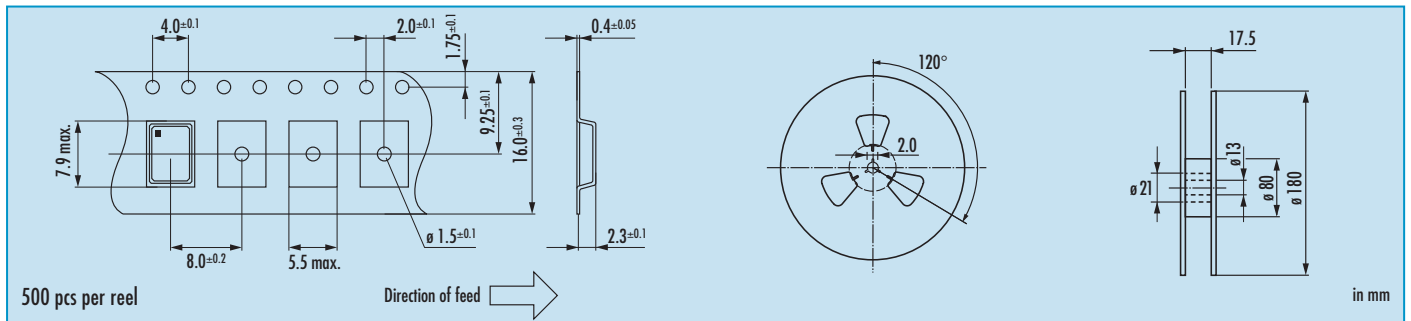

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Reflow Soldering Profile

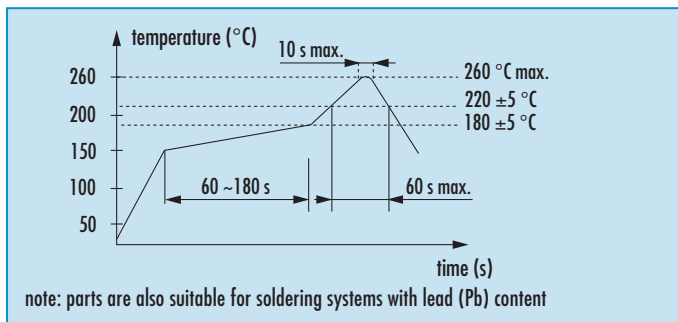

Marking

type / frequency / date code

date code:
 A ~ M: Jan. - Dec.
 9: 2009
 0: 2010
 1: 2011

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M





actual size

Oscillator · LVDS · VCXO

SMD LVDS VCXO · 7.5 x 5.0 mm

- uses quartz crystal at fundamental mode and PLL
- high pulling range ± 150 ppm
- complementary LVDS output, low EMI
- ceramic/metal package



General Data

type	JVD75B	
frequency range	12.0 ~ 800.0 MHz	
frequency stability over all*	± 25 ppm / ± 50 ppm (see table 1)	
frequency pulling range min.	± 150 ppm	
pulling control voltage	1.65 V \pm 1.5 V ^m	
pulling control input impeded. min.	60 k Ω	
current consumption	80mA max.	
supply voltage V _{DC}	3.3 V \pm 5%	
temperature	operating	-10 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-40 °C ~ +85 °C
output	rise & fall time	1.0ns (20% ~ 80% of V _{pp})
	load nom.	100 Ω differential
	swing min.	0.35Vp-p
	offset voltage	1.25 V \pm 0.125V
standby function	yes	
output enable time max.	10ms	
output disable time max.	150ns	
start-up time max.	10ms	
phase jitter 12 kHz ~ 20.0 MHz	< 5.0ps RMS	
symmetry at 50% of V _{pp}	45% ~ 55% typ. (40% \pm 60% max.)	

Table 1: Frequency Stability Code

stability code	B	C				
	± 50 ppm	± 25 ppm				
-10 °C ~ +70 °C	○	○				
-40 °C ~ +85 °C	○					


● standard ○ available

* includes stability at 25 °C, operating temp. range, supply voltage change, shock and vibration, aging 1st year.

Enable / Disable Function

pin #2 (e/d control)	pin #4 / #5 (outputs)	
open or ≥ 2.4 V	active	
gnd or ≤ 0.4 V	high impedance	

Control Voltage Characteristic

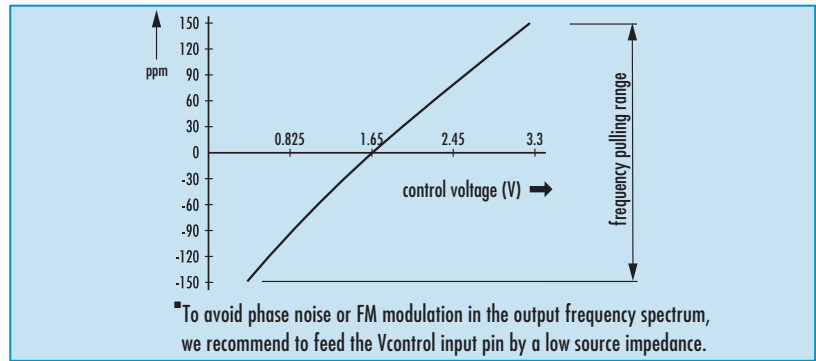

Dimensions

pin connection
 # 1: V_{control}
 # 2: e/d
 # 3: ground
 # 4: output 1
 # 5: output 2
 # 6: V_{cc}

in mm

Order Information


0	frequency	type	stability at 25 °C in ppm	supply voltage	pulling range in ppm	option
Oscillator	12.0 ~ 800.0 MHz	JVD75B	B = ± 50 ppm C = ± 25 ppm	3.3 = 3.3 V	15 = ± 150 ppm	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: O 155.520-JVD75B-B-3.3-15-T1 (Suffix LF = RoHS compliant / Pb free pins or pads)



Oscillator · LVDS · VCXO · JVD75B


Taping Specification

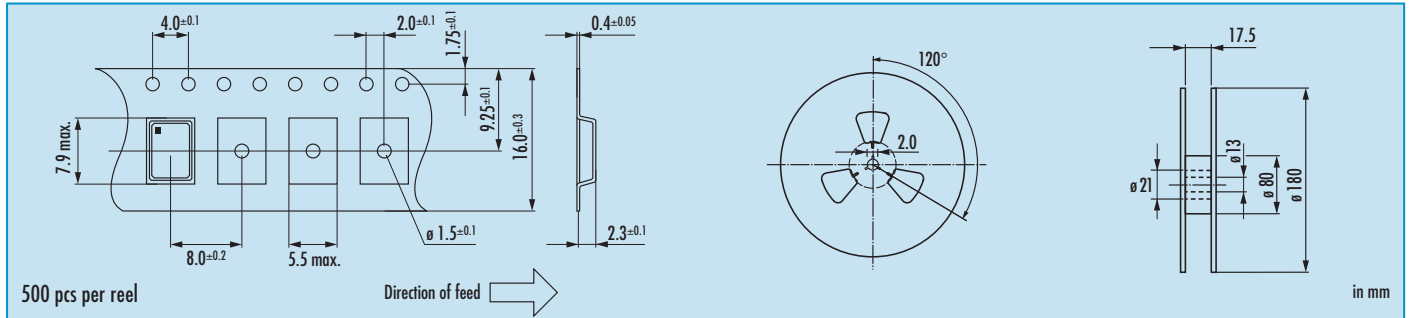

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Reflow Soldering Profile

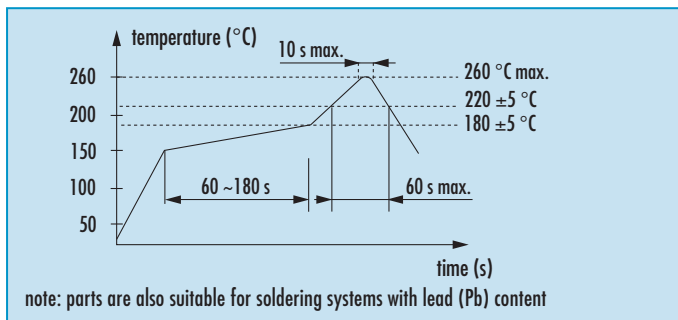

Marking

type / frequency / date code

date code:

A ~ M: Jan. - Dec.

9: 2009

0: 2010


1: 2011

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M





actual size



Oscillator · JCO · 5.0 V

Pin Type Oscillator

- soldering temperature: 260 °C max.
- metal package



General Data

type		JCO8 / JCO14 5.0 V
frequency range		1.0 ~ 160.0 MHz (15pF max.)
		1.0 ~ 40.00 MHz (15pF~50pF max.)
frequency stability over all		± 15ppm ~ ± 100ppm (table 1)
current consumption		see table 2
supply voltage V _{DC}		5.0 V ± 10%
temperature	operating	-10 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	see table 3
	load max.	15pF / 50pF
	current max.	16mA
	low level max.	+0.5 V
	high level min.	V _{DC} -0.5 V
output enable time max.		10ms
output disable time max.		100ns
start-up time max.		10ms
standby function		optional
phase jitter 12 kHz ~ 20.0 MHz		< 1.0ps RMS
symmetry at 0.5 x V _{DC}		45% ~ 55% typ. (40% ~ 60% max.)

Table 1: Frequency Stability Code

stability code	A	B	G	C	D	E
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm	± 15 ppm
-10 °C ~ +70 °C	○	●	○	○	○	○
-40 °C ~ +85 °C	●	○	○	○		

● standard ○ on request

Table 2: Current Consumption max.

Current at 15pF load:		Current at 50pF load:	
1.0 ~ 29.9 MHz	15 mA	1.0 ~ 19.9 MHz	20 mA
30.0 ~ 49.9 MHz	25 mA	20.0 ~ 40.0 MHz	35 mA
50.0 ~ 89.9 MHz	40 mA		
90.0 ~ 124.9 MHz	50 mA		
125.0 ~ 160.0 MHz	60 mA		

Table 3: Rise & Fall Time max.

6.0 ns:	1.0 ~ 49.9 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5.0 ns:	50.0 ~ 79.9 MHz	
4.0 ns:	80.0 ~ 99.9 MHz	
3.0 ns:	100.0 ~ 160.0 MHz	

Dimensions JCO14 / JCO8

JCO14

pin connection
1: not connected or e/d
7: ground
8: output
#14: supply voltage

JCO8

pin connection
1: not connected or e/d
4: ground
5: output
8: supply voltage

in mm

Order Information

0	frequency	type	e/d function	frequency stability	supply voltage code	option
Oscillator	1.0 ~ 160.0 MHz	JCO8 JCO14	2 = no 3 = yes/tristate	see table 1	blank = 5.0 Volt	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: O 20.0-JCO8-3-A-T1 (LF = RoHS compliant / Pb free pins or pads)



Oscillator · JCO · 5.0 V


Enable / Disable Function

pin #1	pin #3
open or high	oscillation
gnd or low	high impedance

Marking

type
frequency
company code / date code

Wave Soldering Profile

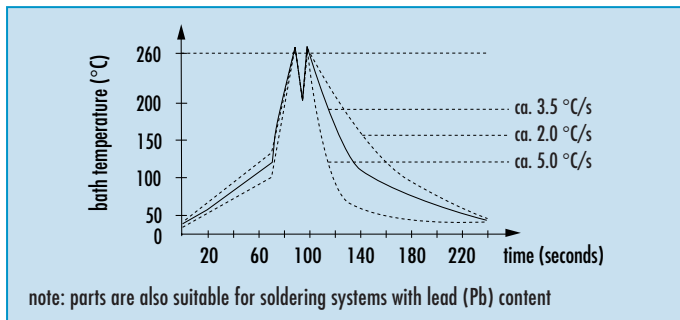

Preferred Type

JC08-3-B
JC014-3-B

Packaging


JC08-3-B packed in antistatic plastic tubes, 40 pcs
JC014-3-B packed in antistatic plastic tubes, 25 pcs



Oscillator · JCO · 5.0 V

Pin Type Oscillator

actual size



- soldering temperature: 260 °C max.
- metal package



General Data

type	JCO8 / JCO14 5.0 V
frequency range	1.0 ~ 160.0 MHz (15pF max.) 1.0 ~ 40.00 MHz (15pF~50pF max.)
frequency stability over all	± 15ppm ~ ± 100ppm (table 1)
current consumption	see table 2
supply voltage V _{DC}	5.0 V ± 10%
temperature	operating: -10 °C ~ +70 °C / -40 °C ~ +85 °C storage: -55 °C ~ +125 °C
output	rise & fall time: see table 3 load max: 15pF / 50pF current max.: 16mA low level max.: +0.5 V high level min.: V _{DC} -0.5 V
output enable time max.	10ms
output disable time max.	100ns
start-up time max.	10ms
standby function	optional
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS
symmetry at 0.5 x V _{DC}	45% ~ 55% typ. (40% ~ 60% max.)

Table 1: Frequency Stability Code

stability code	A	B	G	C	D	E
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm	± 15 ppm
-10 °C ~ +70 °C	○	●	○	○	○	○
-40 °C ~ +85 °C	●	○	○	○		

● standard ○ on request

Table 2: Current Consumption max.

Current at 15pF load:		Current at 50pF load:	
1.0 ~ 29.9 MHz	15 mA	1.0 ~ 19.9 MHz	20 mA
30.0 ~ 49.9 MHz	25 mA	20.0 ~ 40.0 MHz	35 mA
50.0 ~ 89.9 MHz	40 mA		
90.0 ~ 124.9 MHz	50 mA		
125.0 ~ 160.0 MHz	60 mA		

Table 3: Rise & Fall Time max.

6.0 ns: 1.0 ~ 49.9 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5.0 ns: 50.0 ~ 79.9 MHz	
4.0 ns: 80.0 ~ 99.9 MHz	
3.0 ns: 100.0 ~ 160.0 MHz	

Dimensions JCO14 / JCO8

JCO14

pin connection
 # 1: not connected or e/d
 # 7: ground
 # 8: output
 #14: supply voltage

JCO8

pin connection
 # 1: not connected or e/d
 # 4: ground
 # 5: output
 # 8: supply voltage

in mm

Order Information

0	frequency	type	e/d function	frequency stability	supply voltage code	option
Oscillator	1.0 ~ 160.0 MHz	JCO8 JCO14	2 = no 3 = yes/tristate	see table 1	blank = 5.0 Volt	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: O 20.0-JCO8-3-A-T1 (LF = RoHS compliant / Pb free pins or pads)



Oscillator · JCO · 5.0 V


Enable / Disable Function

pin #1	pin #3
open or high	oscillation
gnd or low	high impedance

Marking

type
frequency
company code / date code

Wave Soldering Profile

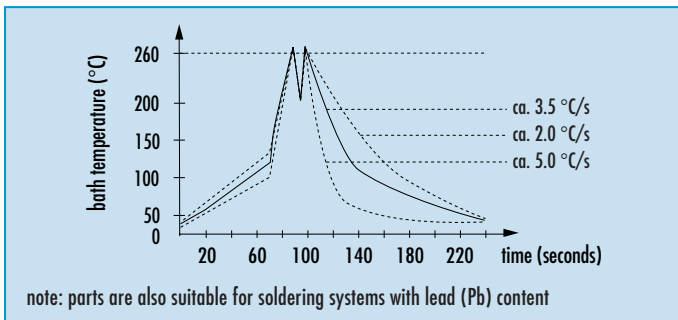

Preferred Type

JC08-3-B
JC014-3-B


Packaging

JC08-3-B packed in antistatic plastic tubes, 40 pcs
JC014-3-B packed in antistatic plastic tubes, 25 pcs





actual size



Oscillator · JCO · 3.3 V

Pin Type Oscillator

- soldering temperature: 260 °C max.
- metal package



General Data

type	JCO8 / JCO14 3.3 V
frequency range	1.0 ~ 160.0 MHz (15pF max.)
	1.0 ~ 50.00 MHz (15pF~30pF max.)
frequency stability over all	± 15ppm ~ ± 100ppm (table 1)
current consumption	see table 2
supply voltage V _{DC}	3.3 V ± 10%
temperature	operating -10 °C ~ +70 °C / -40 °C ~ +85 °C
	storage -55 °C ~ +125 °C
output	rise & fall time see table 3
	load max 15pF / 30pF
	current max. 8mA
	low level max. +0.5 V
	high level min. V _{DC} -0.5 V
output enable time max.	10ms
output disable time max.	100ns
start-up time max.	10ms
standby function	optional
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS
symmetry at 0.5 x V _{DC}	45% ~ 55% typ. (40% ~ 60% max.)

Table 1: Frequency Stability Code

stability code	A	B	G	C	D	E
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm	± 15 ppm
-10 °C ~ +70 °C	○	●	○	○	○	○
-40 °C ~ +85 °C	●	○	○	○		

● standard ○ on request

Table 2: Current Consumption max.

Current at 15pF load:		Current at 30pF load:	
1.0 ~ 29.9 MHz	10 mA	1.0 ~ 29.9 MHz	20 mA
30.0 ~ 49.9 MHz	15 mA	30.0 ~ 50.0 MHz	35 mA
50.0 ~ 89.9 MHz	30 mA		
90.0 ~ 124.9 MHz	45 mA		
125.0 ~ 160.0 MHz	60 mA		

Table 3: Rise & Fall Time max.

6.0 ns: 1.0 ~ 49.9 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5.0 ns: 50.0 ~ 79.9 MHz	
4.0 ns: 80.0 ~ 99.9 MHz	
3.0 ns: 100.0 ~ 160.0 MHz	

Dimensions JCO14 / JCO8

JCO14

pin connection
 # 1: not connected or e/d
 # 7: ground
 # 8: output
 #14: supply voltage

JCO8

pin connection
 # 1: not connected or e/d
 # 4: ground
 # 5: output
 # 8: supply voltage

in mm

Order Information

0	frequency	type	e/d function	frequency stability	supply voltage code	option
Oscillator	1.0 ~ 160.0 MHz	JCO8 JCO14	2 = no 3 = yes/tristate	see table 1	3.3 V = 3.3 Volt	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: O 20.0-JCO8-3-A-3.3V-T1 (LF = RoHS compliant / Pb free pins or pads)



Oscillator · JCO · 3.3 V


Enable / Disable Function

pin #1	pin #3
open or high	oscillation
gnd or low	high impedance

Marking

type
frequency
company code / date code

Wave Soldering Profile

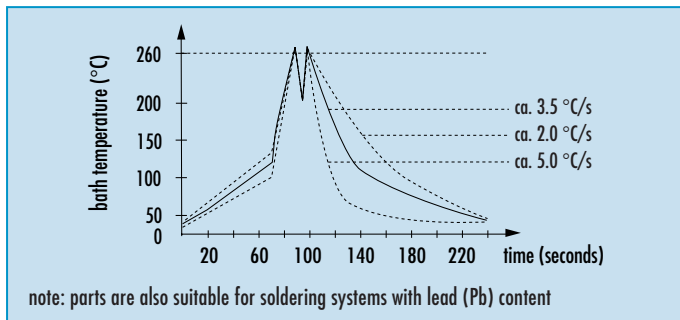

Preferred Type

JC08-3-B-3.3
JC014-3-B-3.3


Packaging

JC08-3-B packed in antistatic plastic tubes, 40 pcs
JC014-3-B packed in antistatic plastic tubes, 25 pcs





actual size



Oscillator · JCO · 3.3 V

Pin Type Oscillator

- soldering temperature: 260 °C max.
- metal package



General Data

type	JCO8 / JCO14 3.3 V
frequency range	1.0 ~ 160.0 MHz (15pF max.)
	1.0 ~ 50.00 MHz (15pF~30pF max.)
frequency stability over all	± 15ppm ~ ± 100ppm (table 1)
current consumption	see table 2
supply voltage V _{DC}	3.3 V ± 10%
temperature	operating -10 °C ~ +70 °C / -40 °C ~ +85 °C
	storage -55 °C ~ +125 °C
output	rise & fall time see table 3
	load max 15pF / 30pF
	current max. 8mA
	low level max. +0.5 V
	high level min. V _{DC} -0.5 V
output enable time max.	10ms
output disable time max.	100ns
start-up time max.	10ms
standby function	optional
phase jitter 12 kHz ~ 20.0 MHz	< 1.0ps RMS
symmetry at 0.5 x V _{DC}	45% ~ 55% typ. (40% ~ 60% max.)

Table 1: Frequency Stability Code

stability code	A	B	G	C	D	E
	± 100 ppm	± 50 ppm	± 30 ppm	± 25 ppm	± 20 ppm	± 15 ppm
-10 °C ~ +70 °C	○	●	○	○	○	○
-40 °C ~ +85 °C	●	○	○	○		

● standard ○ on request

Table 2: Current Consumption max.

Current at 15pF load:		Current at 30pF load:	
1.0 ~ 29.9 MHz	10 mA	1.0 ~ 29.9 MHz	20 mA
30.0 ~ 49.9 MHz	15 mA	30.0 ~ 50.0 MHz	35 mA
50.0 ~ 89.9 MHz	30 mA		
90.0 ~ 124.9 MHz	45 mA		
125.0 ~ 160.0 MHz	60 mA		

Table 3: Rise & Fall Time max.

6.0 ns: 1.0 ~ 49.9 MHz	note: - specific data on request - rise time: 0.1 V _{DC} ~ 0.9 V _{DC} - fall time: 0.9 V _{DC} ~ 0.1 V _{DC}
5.0 ns: 50.0 ~ 79.9 MHz	
4.0 ns: 80.0 ~ 99.9 MHz	
3.0 ns: 100.0 ~ 160.0 MHz	

Dimensions JCO14 / JCO8

JCO14

pin connection
 # 1: not connected or e/d
 # 7: ground
 # 8: output
 #14: supply voltage

JCO8

pin connection
 # 1: not connected or e/d
 # 4: ground
 # 5: output
 # 8: supply voltage

in mm

Order Information

0	frequency	type	e/d function	frequency stability	supply voltage code	option
Oscillator	1.0 ~ 160.0 MHz	JCO8 JCO14	2 = no 3 = yes/tristate	see table 1	3.3 V = 3.3 Volt	blank = -10 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: O 20.0-JCO8-3-A-3.3V-T1 (LF = RoHS compliant / Pb free pins or pads)



Oscillator · JCO · 3.3 V


Enable / Disable Function

pin #1	pin #3
open or high	oscillation
gnd or low	high impedance

Marking

type
frequency
company code / date code

Wave Soldering Profile

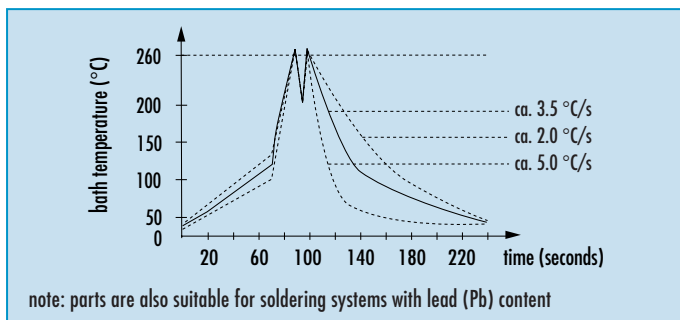

Preferred Type

JC08-3-B-3.3
JC014-3-B-3.3

Packaging

JC08-3-B packed in antistatic plastic tubes, 40 pcs
JC014-3-B packed in antistatic plastic tubes, 25 pcs





actual size

Oscillator · JRO32

Low Power/Low Frequency Oscillator

- low power type for Real Time Clocks (RTC)
- uses tuning fork crystal
- RoHS compliant, ceramic/metal package
- reflow soldering temperature: 260 °C max.



General Data

type		JRO32 for Real Time Clock
frequency		32.768 kHz
frequency tolerance at 25°C		+5 ±20 ppm
frequency stability over temp. (ref to frequ. at +25°C)		-90 ppm ~ +10 ppm for -20 °C ~ +70 °C -140 ppm ~ +10 ppm for -40 °C ~ +85 °C
current consumption (no load)		2.5 µA (5.0 V), 1.5 µA (3.3 V)
supply voltage range V _{DC}		1.5 V ±10% ~ 5.0 V ±10%
temperature	operating	-10 °C ~ +70 °C / -40 °C ~ +85 °C
	storage	-55 °C ~ +125 °C
output	rise & fall time	200 ns
	load max.	15 pF
	current max.	400 µA
	low level max.	0.4 V
	high level min.	V _{DC} - 0.4 V
output enable time		0.15 s/typ. 0.5 s/max.
output disable time max.		150 ns
start-up time max.		1 s
standby function		tristate
standby current max.		1 µA
symmetry at 0.5 x V _{DC}		40% ~ 60% max.

Enable / Disable Function

pin #1 (e/d control)	pin #3 (output)
open	undefined
high "1" (V _{IH} ≥ 0.8 V _{DC})	active
low "0" (V _{IL} ≤ 0.2 V _{DC})	high impedance
disabled conditions: • internal oscillator active • output disabled, high impedance	
enable condition: • pull the e/d pin to „H“ if the oscillator should always be enabled	

Current Consumption


V _{DC}	at 15 pF
5.0 V	7.0 µA
3.3 V	5.5 µA
2.8 V	5.0 µA
2.5 V	4.5 µA
1.8 V	3.5 µA
1.5 V	3.0 µA

Marking


frequency / date code	
date code:	
A ~ M: Jan. - Dec.	
0: 2010	3: 2013
1: 2011	4: 2014
2: 2012	5: 2015

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

Dimensions

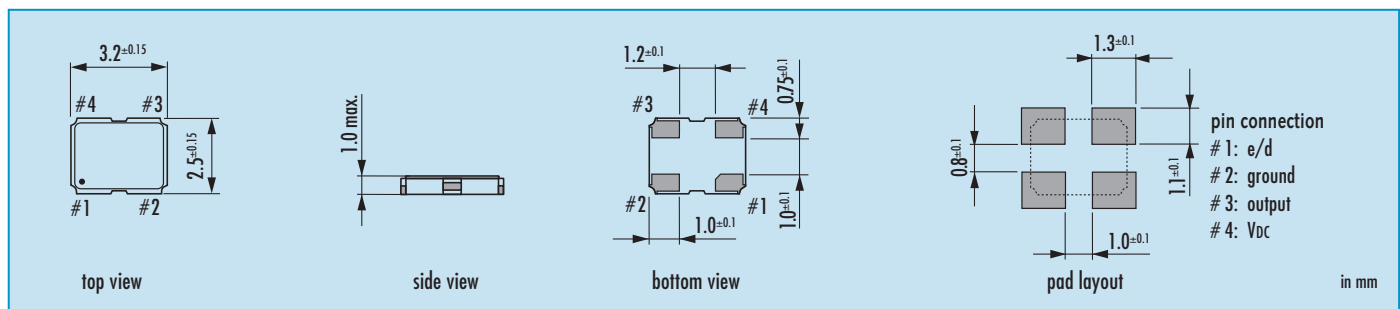


Order Information

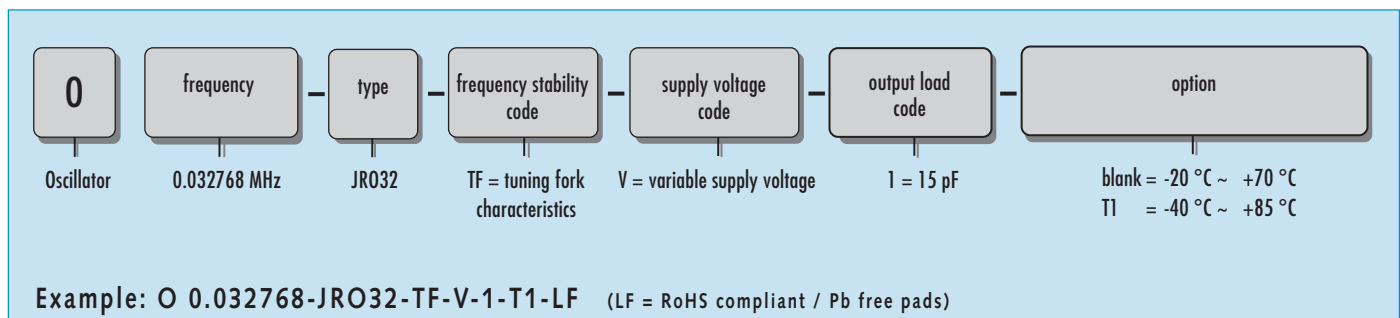


JRO32 · Low Power / Low Frequency Oscillator

Taping Specification

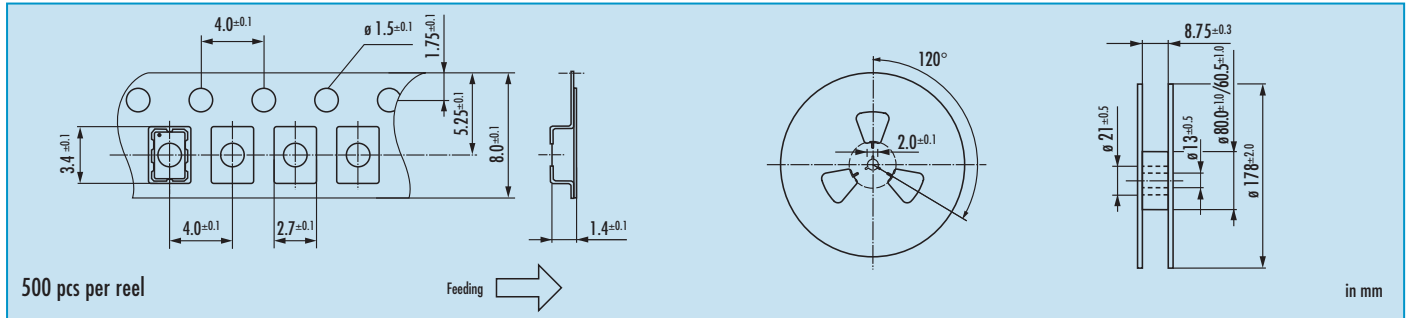


Reflow Soldering Profile

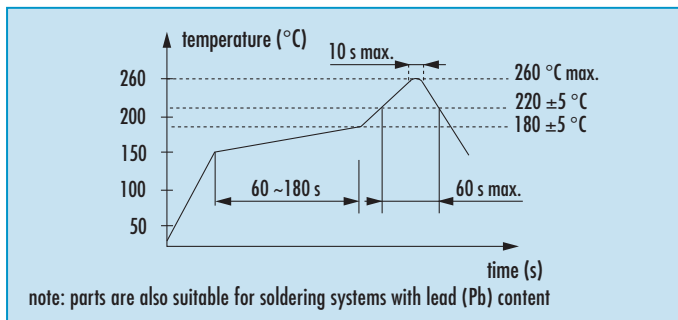

Packing Note

- standard packing units are 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk

Nominal Temperature Characteristic

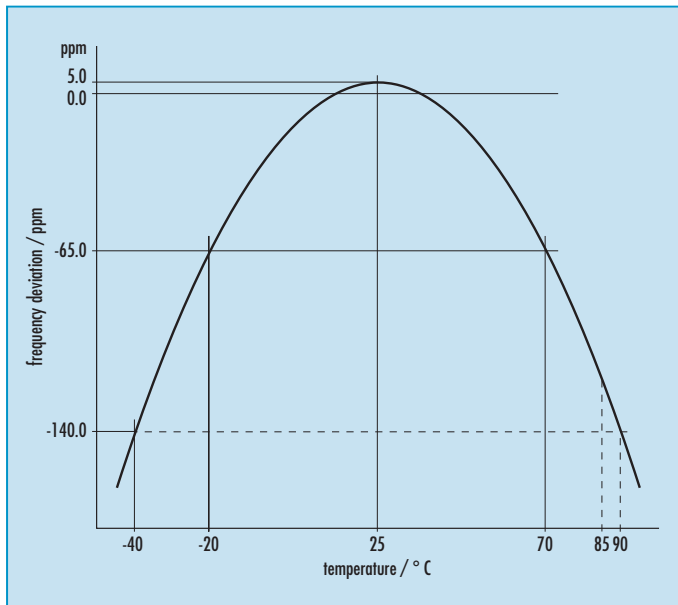




FINDING SOLUTIONS...

...AND IMPLEMENTING THEM

At Jauch Quartz, customer satisfaction is not just an empty phrase, but a living reality. Delivery reliability is a proven fact at Jauch Quartz. Constant deliveries to renowned customers the world over prove that relying on Jauch Quartz means relying on production security. Because for us, overall product quality has always entailed a great deal more than just the product alone. With our Customer Support Center we offer active cooperation in any situation. Even in the concept phase of a development, it's worth discussing an optimal solution with us.

Or do you need a few hundred or a few thousand quartz crystals for your pilot run? We're the quartz specialists, so for us that's part of customer care. It's something that our customers have grown to appreciate.

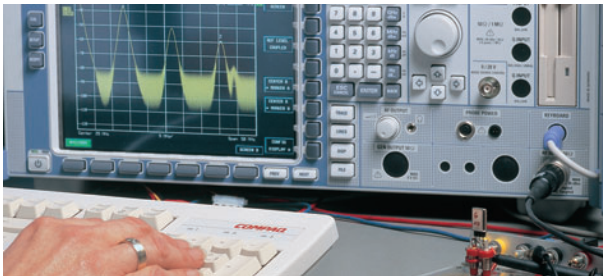

*Safety from high-quality measuring technology:
Special measuring systems, e.g. for analyzing the
frequency spectrum and noise conditions, guarantee that
our customers can rely one hundred percent on the
parameters set.*



*Application service via know-how:
Our development and service department supports our
customers in all questions of circuit design and – on
request – takes a closer look at application
scenarios.*



*Technical service from specialists:
At Jauch, developers find competent contacts
who support them in switch design just as
much as with special measuring technology
requirements.*



B.C.E. s.r.l.
Via Regina Pacis, 54/c - 41049 SASSUOLO (MO) Italy
Tel. +39 0536 811.616 r.a. - Fax +39 0536 811.500
www.bce.it - E-mail: bce@bce.it






- Our own quartz product **development center**
- **Consulting and care** by specialists for quartz products
- **Check-up service:** switching tests with special test devices
- **Fast service** with programmable oscillators for pilot runs and with quartz products in standard frequencies

THE SPECIALIST FOR FREQUENCY CONTROL PRODUCTS

- **Worldwide presence**
- **High availability** for standard frequencies, with over 20 million components off the shelf

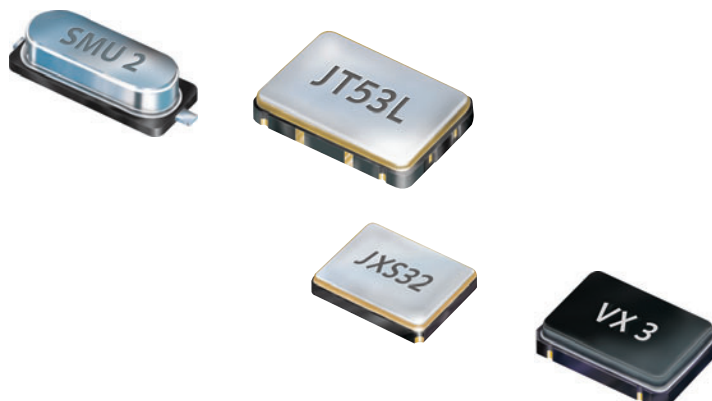

PRODUCTION WORLDWIDE...

...FOR WORLD-FAMOUS BRANDS

Jauch – the world brand for quartz technology. With our own production facilities, we're present in important electronics centers all over the globe. And everywhere we are bound to the same basic principles: high efficiency, reliable delivery, value for money, and highest quality. Because we know how exacting our customers are. And we also know why.

International production,
guaranteed by
universal quality standards



From raw quartz crystal production to special short runs to mass production in the millions in ever-constant quality, Jauch Quartz has a lot of performance to offer – and that applies just as much to large groups of companies as to smaller specialists. High flexibility in product design and production amounts enables us to cover a broad customer and business spectrum and thus maintain our independence.



Technology that makes quality possible: Ultrasound purification of quartz blanks for perfect surfaces.



Grinding of quartz blanks: The right surface for the right clock rate.



Jauch has production facilities at many locations around the world – from Europe to Asia. However different the people at these sites are, they all have one thing in common: they all work according to the same system of values. They all belong to the same corporate culture. That is the only way to produce on different continents and retain a uniform standard. Because wherever Jauch products are on the pulse of progress, the rhythm has to be just right.



B.C.E.
ELECTRONICS
Importation & Distribution
Electronic Components

B.C.E. s.r.l.
Via Regina Pacis, 54/c - 41049 SASSUOLO (MO) Italy
Tel. +39 0536 811.616 r.a. - Fax +39 0536 811.500
www.bce.it - E-mail: bce@bce.it





*The entire quartz crystal
processing chain:
from raw quartz production...*

*...component production using
semi- or fully-automatic production
technology depending on the run size...*

*...to series-oriented quality
assurance and automated
100-percent testing.*

B.C.E.
ELECTRONICS
Importation & Distribution
Electronic Components

B.C.E. s.r.l.
Via Regina Pacis, 54/c - 41049 SASSUOLO (MO) Italy
Tel. +39 0536 811.616 r.a. - Fax +39 0536 811.500
www.bce.it - E-mail: bce@bce.it



Certificate DIN EN ISO 9001:2000

SGS

Certificate DE05/53347

The management system of

JAUCH QUARTZ GmbH
In der Lache 24
DE-78056 VS-Schwenningen

has been assessed and certified as meeting the requirements of

ISO 9001:2000

For the following activities

**Design, production and sales of crystals,
oscillators, resonators and filters
Sales of batteries**

Further clarifications regarding the scope of this certificate and the applicability of ISO 9001:2000 requirements may be obtained by consulting the organization

This certificate is valid from 6th April 2005 until 5th April 2008
Issue 3. Certified since November 1998

Authorised by


Board of Directors


Certification body




SGS-ICS Gesellschaft für Zertifizierungen m.b.H. und Umweltgutachter
Raboisen 28 20095 Hamburg Germany
t +49 (0)40 30-101-361 f +49 (0)40 33-04-08 www.sgs.com

Page 1 of 1



graphic design: stähler regner photo: printed by: wahl (broad) security printing ltd. wiesbaden





B.C.E. S.r.l. - Via Regina Pacis, 54/c - I 41049 Sassuolo (MO), Italy

Tel: (+39) 0536 811616 Fax: (+39) 0536 811500 E-mail: bce@bce.it Web: www.bce.it

