

# Q8 Push Lock Connector

## Product Data Sheet

## Amphenol LTW New Push-Lock Connector Series - Q8

Amphenol LTW introduces its brand new Q8 push-lock connector series for your space-constraint applications. With audible feedback and guided key design, this Q8 Series ensures error-proof and easy assembly for blind mating. A simple quick and safe release to save you time and cost, with just a small pull force.



Designed to meet IP68 waterproof protection and rated to UL-F1 UV resistance, these connectors are fit for use to either indoor or outdoor wet locations and are UL2238 and UL50e compliant to achieve highest safety standard.

The Q8 connector series is rated up to 5A for both Low Voltage Power and Data transmissions. The product range includes 2 to 6 contact configuration and Hybrid (Power + Data) solution to suit your variable requirements.



**Applications:**



LED Lighting



Communication Systems



IP CCTV & Security



Industrial Automation



Electric Vehicle

**Specification:**

General Characteristics		Technical Characteristics – Mechanical	
Current Rating	2A, 5A, 5A+2A	Mating Force	5 kgf Max.
Voltage Rating	2A: 60 Vdc	Unmating Force	3 kgf Max.
	5A: 277 Vac / Vdc	Tensile strength	10 kgf Min.
	5A+2A: 5A, 277 Vac & 2A, 60 Vdc		
Durability	2,000 cycles	Material Specification	
Waterproof Rating	IP 68 (Mated, 1M/24 Hours)	Housing	High-temperature thermoplastic
Operating Temperature	-30 ~ +105°C (UL Rating : -30 ~ +90°C)	Terminal	Copper Alloy, Gold Plated.
		Gasket & O-ring	Rubber
Technical Characteristics - Electrical		UV Resistant	f1 material
Contact Resistance	10 mΩ max.	Environmental Conditions and Performance	
Insulation Resistance	100 MΩ Min.	Salt Spray	• 500 hours
<b>Safety Compliance</b>	UL 2238 ( Outdoor Use, UL 50e)		In Process




# Q8 Push Lock Connector

## Physical Dimensions Data Group

### Straight types

- Male / Female Contacts available
- UL Cable (21388)

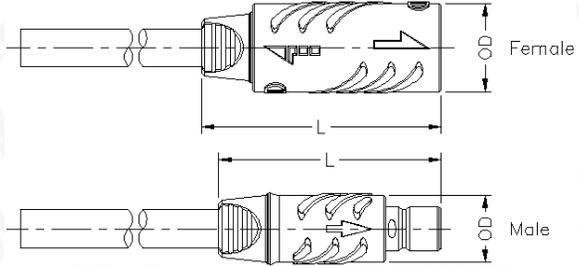


Dimension		L		OD	
Size	Type	Female	Male	Female	Male
M8	Push Lock	38.8	36.0	14.0	10.6

• UNIT: mm

### Front Fastened

- Male Connector
- Male / Female Contacts available
- Circular Flange

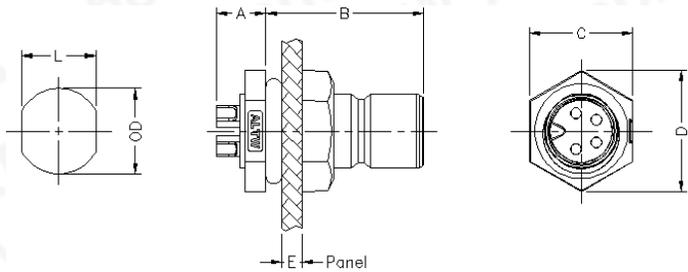

Dimension		L	OD	A	B	C	D	E (Max.)
Size	Type							
M8	Straight	7.1	8.1	4.8	15.2	10.0	11.5	2.0

• UNIT: mm

# Memo

A series of horizontal dotted lines for writing a memo.



Scan to visit our website



**B.C.E. S.r.l.** - Via Regina Pacis, 54/c - I 41049 Sassuolo (MO), Italy

Tel: (+39) 0536 811616 Fax: (+39) 0536 811500 E-mail: [bce@bce.it](mailto:bce@bce.it) Web: [www.bce.it](http://www.bce.it)

