



Quartz Crystal · MTF32

- Tuning fork crystal · 3.0 x 8.0 mm
- 3 x 8 mm cylinder type
- 32.768 kHz standard



RoHS compliant



Pb free



REACH compliant



Conflict mineral free

actual size

GENERAL DATA

TYPE	MTF32
frequency	32.768 kHz
frequency tolerance at 25 °C ± 5 °C	±10 ppm / ±20 ppm
load capacitance C_L	10 pF / 12.5 pF std. (6 pF ~ 12.5 pF on request)
temperature constant (T_C)	$T_C = -0.04 \cdot 10^{-6} / ^\circ\text{C}^2$ max. $T_C = -0.034 \cdot 10^{-6} / ^\circ\text{C}^2$ typical
frequency temperature characteristic	$\Delta f = T_C \cdot (T_A - T_{TP})^2$ in [ppm] T_A = actual ambient temperature $T_{TP} = 25 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$ T_{TP} = turning point temperature
operating temperature range	-20 °C ~ +70 °C / -40 °C ~ +85 °C
shunt capacitance C_0	1.5 pF typical
series resistance max. (ESR)	30.0 kΩ (23.0 kΩ ask if available)
storage temperature	-40 °C ~ +90 °C
drive level max.	1 μW
aging	< ± 5 ppm

DIMENSIONS

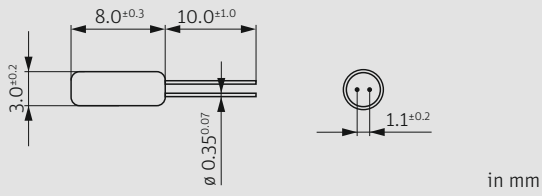


TABLE 1: FREQUENCY STABILITY VS. TEMPERATURE


		-80 ppm	-160 ppm
-20 °C ~ +70 °C	STD.	●	
-40 °C ~ +85 °C	T1		●

● standard

MARKING

company code
date code
internal code (optional)


WAVE SOLDERING PROFILE

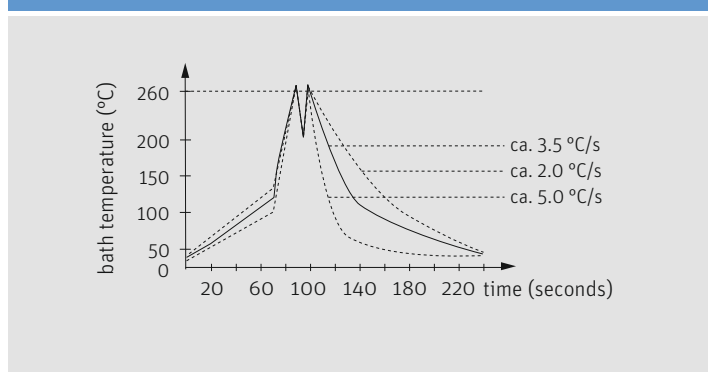

MOUNTING

Mounting:

if the crystal should be mounted vertically to your board (see picture), do not directly solder the metal can. The crystal may be overheated by the direct heat flow. Please use glue (hot-melt adhesive) or mechanical clamping to fasten the metal can.

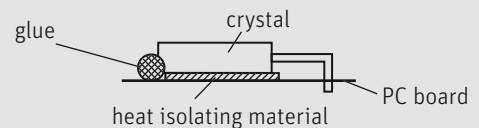

ORDER INFORMATION

Q	frequency	type	load capacitance in pF	tolerance at 25 °C	option
Quartz	0.032768 MHz	MTF32	6 pF ~ 12.5 pF 10.0 pF Std. 12.5 pF Std.	20 = ±20 ppm 10 = ±10 ppm	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C

Example: Q 0.032768-MTF32-12.5-20-LF (Suffix LF = RoHS compliant / Pb free pads)



B.C.E. S.r.l. - Via Regina Pacis, 54/c - Sassuolo (MO) - I 41049 - Italy
 Tel.: 0536 811616 - Fax: 0536 811500 - Web: www.bce.it - E-mail: bce@bce.it

13032019

Jauch Quartz GmbH • e-mail: info@jauch.com • full data can be found under: www.jauch.com
 All specifications are subject to change without notice