



## M8 12 ports Wide type Junction box

- Housing material: Nylon/Black
- Coupling nut: Brass/Nickel
- Contact carrier: TPU/Black
- Pin: Brass/Gold
- O-ring: FPM/FKM, IP degree: IP67
- Load: 10~30VDC, 2 A/port, 6 A total, LED 10mA
- Temperature range: -30...+80°C
- Mechanical operation: ≥100


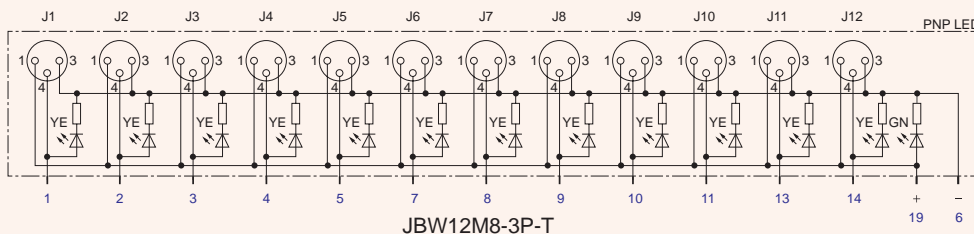


Dimensions/Circuit diagram	Specifications	Type NO./ID NO.
	<p>1 signal per port NO LED M23 vertical connector</p>	<p>JBW12M8-3-T 10073190</p>
	<p>1 signal per port PNP LED M23 vertical connector</p>	<p>JBW12M8-3P-T 10073191</p>

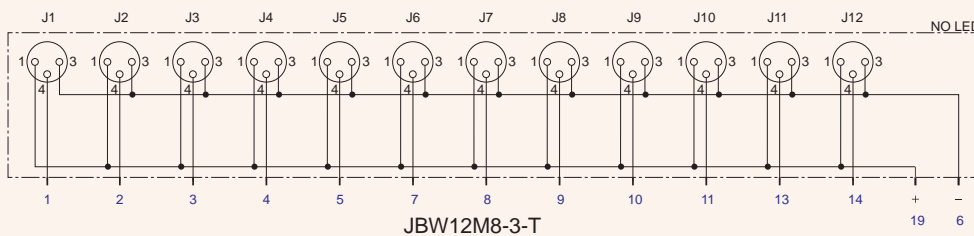

■ Thread connection  
■ Cable connection  
■ Terminal connection

M23  
19-Pin



\* Standard cable lengths are 2/5/10M, Consult factory for other lengths

\*\* Standard coupling nut material is nickel plated brass