


# Amphenol LTW M12 Push-In Field Installable

For Your Fast & Easy Wire Termination

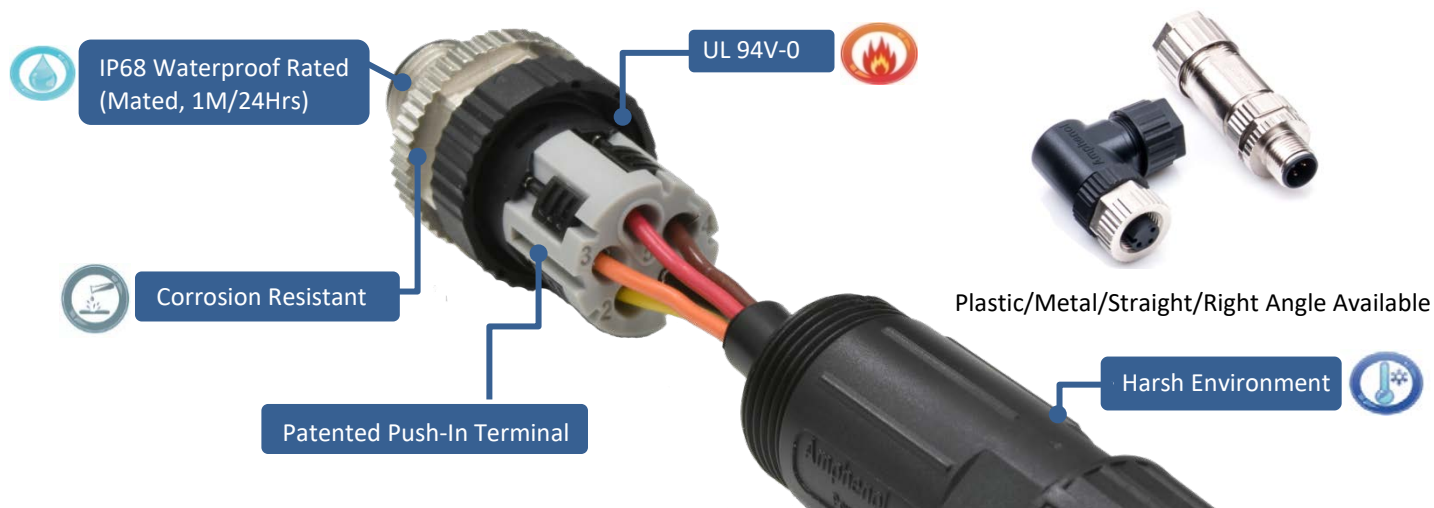

**3 Simple Steps**


**STEP 1**  
Unlock Switch



**STEP 2**  
Insert Wires



**STEP 3**  
Click & Lock



Coding	A-coded					B-coded			D-coded		
Contacts	3	4	5	6	8	3	4	5	3	4	5
Current Rating	4A		2A			4A			4A		
Contact Configuration											

● Available Now

**Application:**



Broadband Wireless Access



Industrial Automation



Surveillance Systems



MRT / Railway

**Specification:**

General Characteristics

Connector Type	Male and Female	Waterproof Rating	IP68 Mated (1M / 24Hrs)
Locking Mechanism	Screw Type	Wire Size AWG	22 AWG ~ 24 AWG
Coding	A, B and D-Coded	Cable OD	4.0~8.0 mm
Temperature Range	-40°C ~ 105°C	Mechanical Operation	100 Cycles Min.