




## OPTIONS & ORDERING INFORMATION

| SX3CJ            |                   |                     |                    |               |                                     | MHz |
|------------------|-------------------|---------------------|--------------------|---------------|-------------------------------------|-----|
| Supply Voltage * | Operating Temp. * | Overall Stability * | Tri-state Function | Output Load * | Frequency in MHz                    |     |
| 18 = +1.8V       | D = -10° / +60°C  | 20 = ±20 ppm        | E = Tri-state      | blanc = 15 pF | Please specify the frequency in MHz |     |
| 25 = +2.5V       | E = 0° / +70°C    | 25 = ±25 ppm        |                    |               |                                     |     |
| 33 = +3.3V       | F = -20° / +70°C  | 30 = ±30 ppm        |                    |               |                                     |     |
|                  | G = -30° / +75°C  | 50 = ±50 ppm        |                    |               |                                     |     |
|                  | H = -30° / +85°C  | 100 = ±100 ppm      |                    |               |                                     |     |
|                  | K = -40° / +85°C  |                     |                    |               |                                     |     |

\* Note : Not all combinations are possible , please consult us.

## OUTLINE DIMENSIONS (MM)

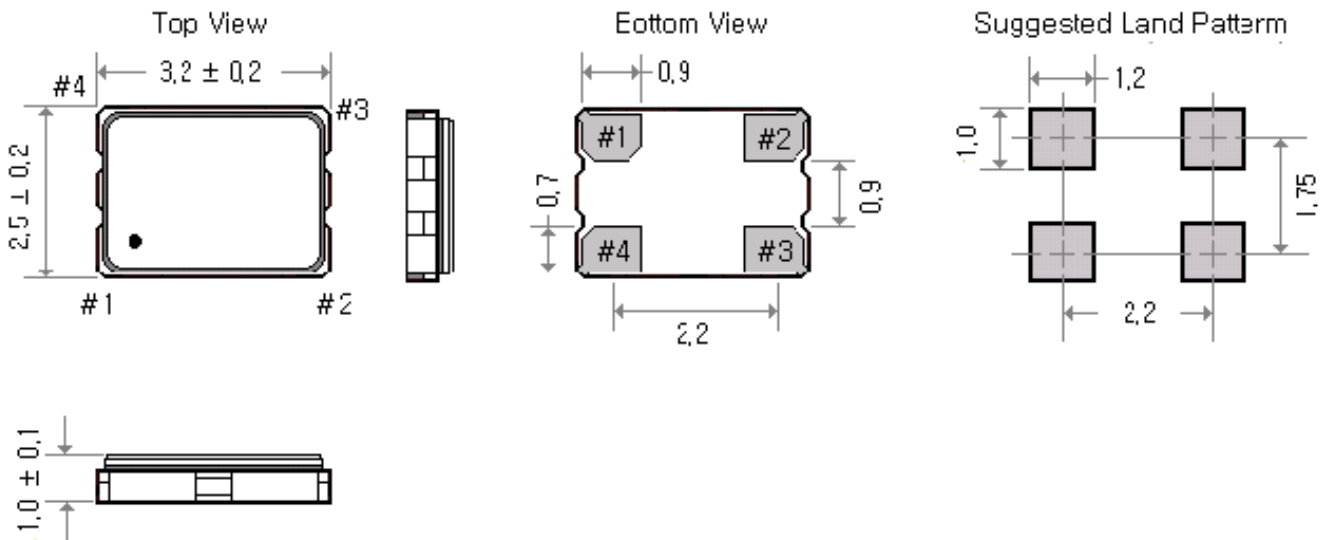

### Pin Connections

#1 : E/D

#2 : GND

#3: Output

#4 :Vdd