


OPTIONS & ORDERING INFORMATION

SX3EP					MHz
	Supply Voltage *	Operating Temp. *	Overall Stability *	Tri-state Function	Frequency in MHz
	25 = +2.5V 33 = +3.3V	E = 0° / +70°C F = -20° / +70°C K = -40° / +85°C	20 = ±20 ppm 25 = ±25 ppm 30 = ±30 ppm 50 = ±50 ppm 100 = ±100 ppm	E = Tri-state	Please specify the frequency in MHz

* Note : Not all combinations are possible , please consult us.

OUTLINE DIMENSIONS (MM)

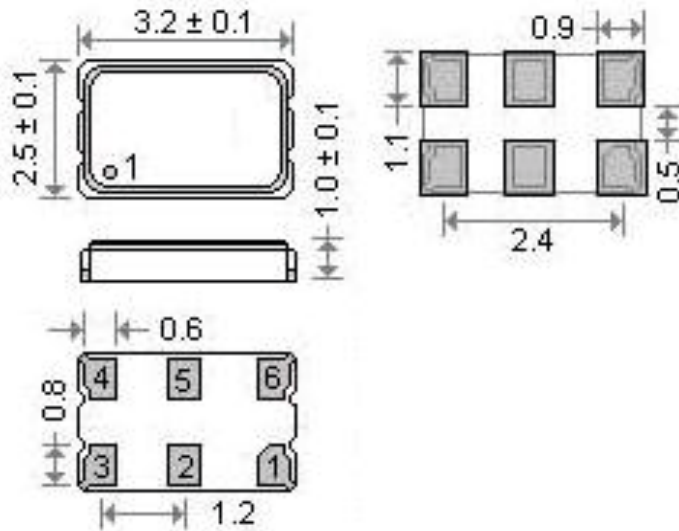

Pin Connections

- #1 : E/D
- #2 : NC
- #3: GND
- #4 : Output
- #5 : Complementary output
- #6 :Vdd