

SP2HV HCSL SURFACE MOUNT VOLTAGE CONTROLLED CRYSTAL CLOCK OSCILLATOR

FEATURES

- SMD package with metal lid
- Excellent Phase Noise
- High Speed Current Steering Logic
- Applications: SONET, xDSL, SDH, Media box, ...

14.3 x 8.7 x 5.5 mm



Item	Specification		
Frequency Range	25 MHz ~ 200 MHz (in case higher frequency needed, please contact us)		
Output Logic	HCSL		
Overall Frequency Stability *	± 20 ppm ~ ± 100 ppm (see options)		
Operating Temperature Range	0 ~ +70 °C commercial application (see options) -40 ~ +85 °C industrial application (see options)		
Supply Voltage Vdd	+2.5 V ±5%	+2.8 V ±5%	+3.3 V ±5%
Control Voltage Center	+1.25 V	+1.4 V	+1.65 V
Control Voltage Range	0.25 V to 2.25 V	0.0 V to 2.8 V	0.0 V to 3.3 V
Supply Current Idd	25 mA typ. ~ 100 mA typ.		
Output Voltage HIGH VOH	660 mV min. ; 740 mV typ. ; 850 mV max.		
Output Voltage LOW VOL	-150 mV min. ; 0 mV typ. ; 150 mV max.		
Output Load	100 ohm between output and complementary output		
Symmetry	45 / 55 %		
Rise Time / Fall Time Fr / Ff	340 ps typ.		
Tri-state Function	pin #1 or pin #2 = high or open pin #1 or pin #2 = low	pin #4 - pin#5 ==> oscillation pin #4 - pin#5 ==> high impedance	
Start-up Time	3 ms typ. ; 10 ms max.		
Integrated Phase Jitter (12 kHz to 20 MHz band)	200 fs typ.		
Frequency Pulling Range	±50 ppm min. ; ±100 ppm min. (See options)		
Linearity	6% typical ; 10% max.		
Slope Polarity	Positive (Increasing control voltage always increases output frequency)		
Modulation Bandwidth	10 kHz min. (-3 dB)		
Input Impedance	1 MΩ min.		
Packing Unit	800pcs / reel		
Soldering Condition	260 °C , 10 sec x2 max		
	Customer specifications on request		


(*) Includes initial tolerance @+25°C, stability over operating temperature, stability vs. load change, stability vs. supply change and one year aging

OPTIONS & ORDERING INFORMATION

SP2HV						 MHz
Supply Voltage	Operating Temp. *	Overall Stability *	Tri-state Function	Package type	Pulling *	Frequency in MHz	
25 = +2.5 V	C = 0° / +50°C	20 = ±20 ppm	E1 = Tri-state , pin #1	6P = 6-pad version	50 = ±50 ppm min.	Please specify the frequency in MHz	
28 = +2.8 V	D = -10° / +60°C	25 = ±25 ppm	E2 = Tri-state , pin #2		100 = ±100 ppm min.		
33 = +3.3 V	E = 0° / +70°C	30 = ±30 ppm					
	F = -20° / +70°C	50 = ±50 ppm					
	G = -30° / +75°C	100 = ±100 ppm					
	H = -30° / +85°C						
	K = -40° / +85°C						

(*) Note : Not all combinations are possible, please consult us.

OUTLINE DIMENSIONS

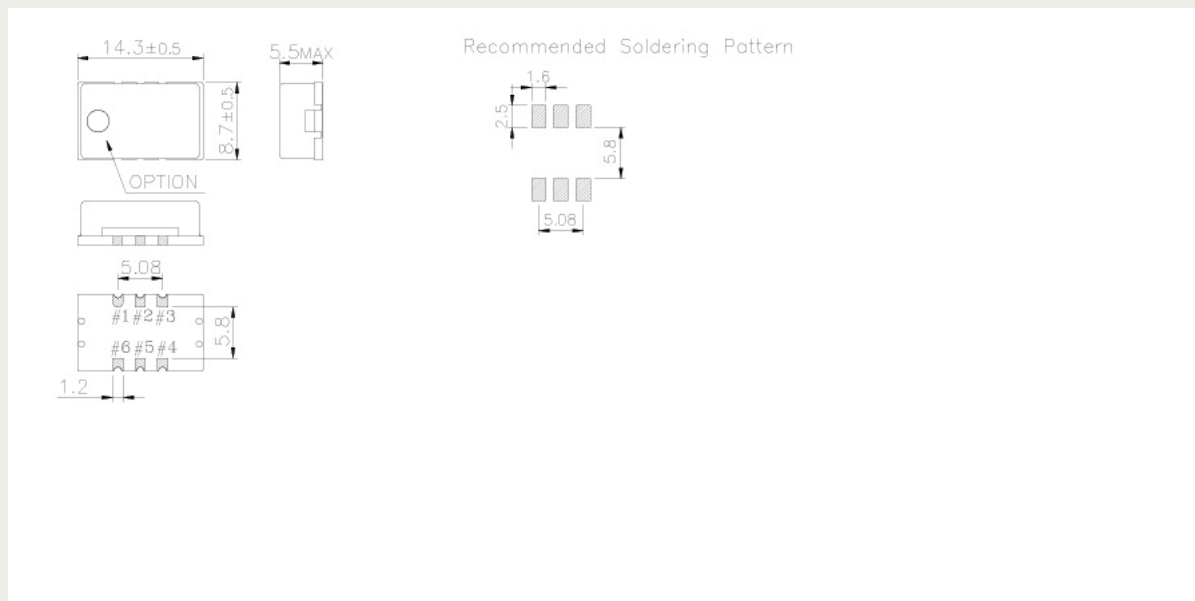

Pin Connections	#1 : E/D or Control Voltage	#2 : E/D or Control Voltage	#3: GND
	#4 : Output	#5 : Complementary Output	#6: Vdd



B.C.E. s.r.l.
 Via Regina Pacis, 54/c - 41049 SASSUOLO (MO) Italy
 Tel. +39 0536 811.616 r.a. - Fax +39 0536 811.500
 www.bce.it - E-mail: bce@bce.it

