

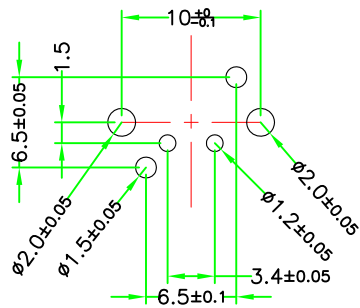
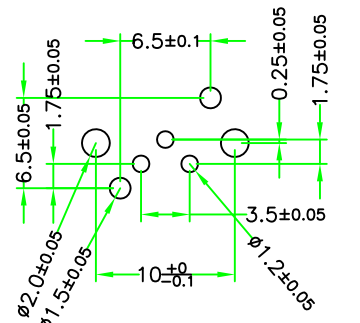


RoHS IP66~68

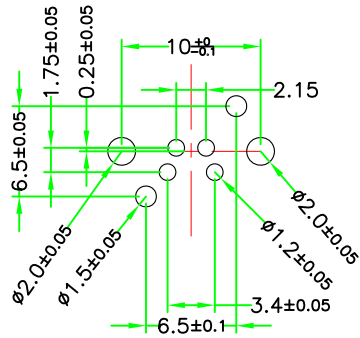


PCB Layout


A08D-M204HPRR







A08D-M203HPRR



A08D-M202HPRR



PIN ASSIGNMENT FRONT VIEW (前視圖)

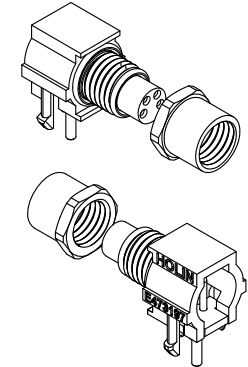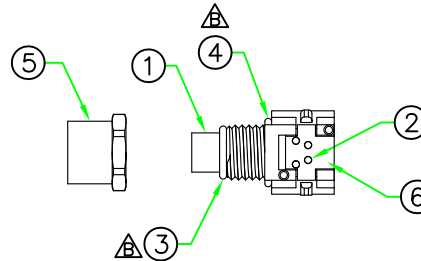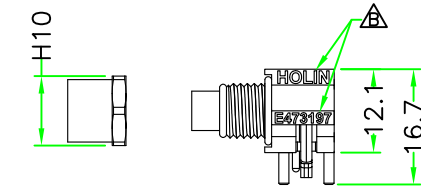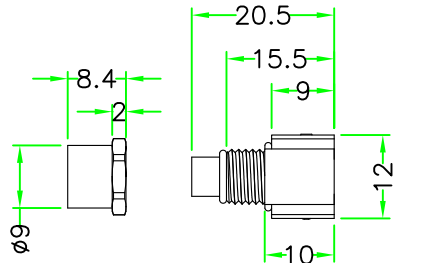

△ LABEL of contents :

UL
 E473197
 A08D-M2xxHPRR
 Rating : 60 V AC/DC , 3 A
 CAUTION:
 NOT FOR INTERRUPTING CURRENT
 ATTENTION:
 NE PAS UTILISER POUR COUPER LE COURANT

7	GLUE	EPOXY.	BLACK	1	
6	PIN STAND	NYLON+GF.	BLACK	1	
5	RING NUT	BRASS. Nickel Plated.		1	
4	O-RING	SILICON. △	B.BLUE	1	
3	O-RING	SILICON. △	B.BLUE	1	
2	CONTACT	BRASS, Female Pin. 6u" Gold Plated.		N	
1	CONNECTOR	M8 A-Coding Female R/A Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
 禾凌科技股份有限公司

UNIT: mm TITLE : M8 A-Coding 2~4 Pin Female R/A PCB Mount Connector

SCALE 1:1

UNLESS OTHERWISE SPECIFIED TOLERANCES:
 X ±0.5 XX ±0.25
 XXX ±0.1 ANGLE ±1°X

REV. B SHEET 1/1 DWG.NO: A08D-M2xxHPRR

P/N: A08D-M2xxHPRR DR. JACK
 CH. ERIC
 AP.