


IP66-68

RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	July/01/2008
A1	Add 7~8 Pin & correct Pin Assignment.	Oct/16/2018

NOTES:

- ELECTRICAL CHARACTERISTICS:  
CURRENT RATING: 1.5A / 3A  
TEMPERATURE RANGE: -25°C TO +85°C  
DIELECTRIC WITHSTANDING VOLTAGE:  
500V AC FOR ONE MINUTE
- HOW TO ORDER: A08x-M2xxSN

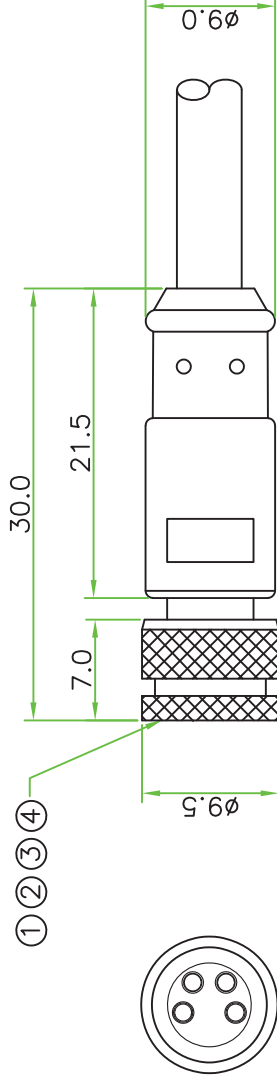

- 02 - 2 PINS
- 03 - 3 PINS
- 04 - 4 PINS
- 05 - 5 PINS
- 06 - 6 PINS
- 07 - 7 PINS
- 08 - 8 PINS

- I - CURRENT RATING 1.5A
- D - CURRENT RATING 3A

\*Cable specification and length can be customized.

2		A08D-M202SN	A08D-M203SN	A08D-M204SN	A08I-M205SN	A08I-M206SN	A08I-M207SN	A08I-M208SN
4		A08D-M202SN	A08D-M203SN	A08D-M204SN	A08I-M205SN	A08I-M206SN	A08I-M207SN	A08I-M208SN

PIN ASSIGNMENT FRONT VIEW (前視圖)

No.	PART NAME	DESCRIPTION	COLOR	QTY	REMARKS
4	Ring Nut	Brass, nickel plated with ratchet mechanism, without sleeve		1	
3	O-Ring	Viton	BLACK	1	
2	Contact	Brass, 6 u" gold plated. Female contact.		N	
1	Connector	M8 A Coding Female connector insert. Nylon+GF.	BLACK	1	

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司

UNIT: mm	M8 A Code
SCALE	2:1
TITLE	Female molded cable Assy
UNLESS OTHERWISE SPECIFIED TOLERANCES:	
x ± 0.5	.xx ± 0.25
.xxx ± 0.1	ANGLE ± 1°
REV.	A1
SHEET	1 / 1
P/N:	A08x-M2xxSN
DWG. NO:	A08x-M2xxSN
DR:	SIBYL
CH:	ERIC
AP:	