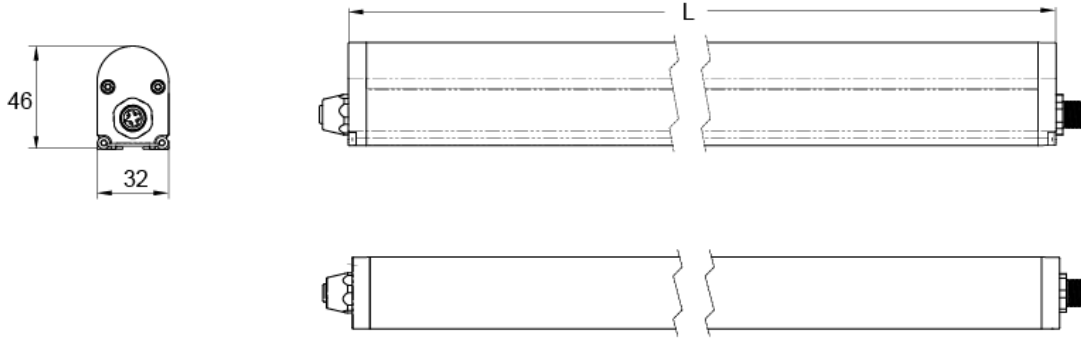


Basic Information				
Series	Integrated lighting ELL32	Model	ELL32*	
Technical Data				
Physical Data	Material	Aluminium + PC	Vertical adjusting T Angle	--
	IP	IP20	Color	Silvery
	Mounting	Fix with 8 screws		
Light Source Data	L70	>50000H	LED Ra	>80
Optical Data	Way of light	Symmetry	Luminous Efficiency	>80 lm/w
	Ra	>80	CCT	5700K
Electrical Data	Power	8W/15W/23W/30W	Input	DC 24V
Other Data	Operating Conditions	-20~50°C/≤95%RH	Storage Condition	-40~70°C/≤95%RH

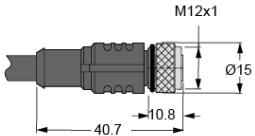



Pictures of Lamps&Sizes (mm)





Models	L1(mm)	Power(W)
ELL32W803...	316	8
ELL32W806...	616	15
ELL32W809...	916	23
ELL32W812...	1216	30

Wiring

Series	Pre-moulding connector	Pin out	Connector model	Wiring Diagram
ELL32 (DC 24V)		<p>Female</p>  <p>Male</p> 	<p>ELL32T-K-2M ELL32T-K-Z-2M (Double ended)</p> <p><small>※This model is 2m cable, the other length canbe customized</small></p>	

Mounting brackets (mm)



The default matching mounting brackets, 304 stainless steel, each lamp with two mounting brackets

