


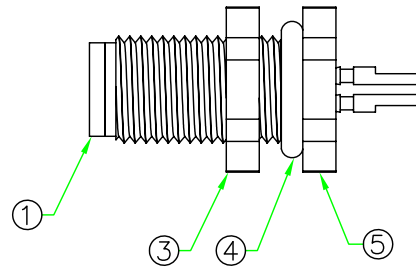



RoHS

IP66~68

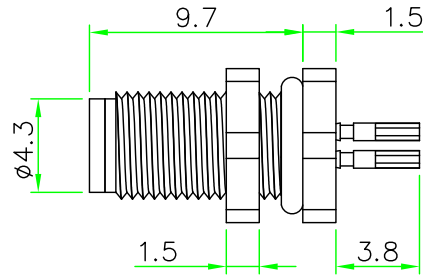


REV.	DESCRIPTION	DATE
A	ISSUE	Dec/16/2014

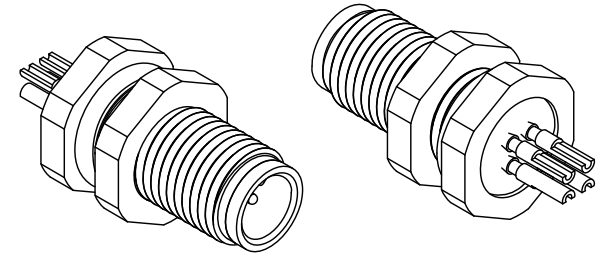

NOTES:

- ELECTRICAL CHARACTERISTICS:  
CURRENT RATING: 1A  
TEMPERATURE RANGE: -25°C TO +85°C  
DIELECTRIC WITHSTANDING VOLTAGE:  
500V AC FOR ONE MINUTE
- Panel Thickness Max. 3.0mm.
- HOW TO ORDER: A05I-M1XXHSR

03 - 3 PINS  
04 - 4 PINS

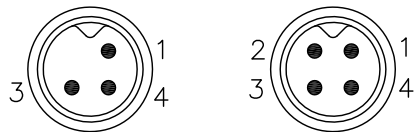

A05I-M103HSR

A05I-M104HSR

PIN ASSIGNMENT FRONT VIEW  
(前視圖)

5	HEX NUT	Brass, Nickel Plated.		1	
4	O-RING	VITON.	BLACK	1	
3	HOUSING	BRASS, Nickle Plated.		1	
2	CONTACT	BRASS, 6 u" Gold Plated. Male Contact.		N	
1	CONNECTOR	M5 A-Coding Male Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN <sup>®</sup> HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE	M5 A-Coding Male Panel Connector Rear Mount Hex Flange With Solder Bucket Pin	
SCALE	3:1		P/N:	A05I-M1xxHSR	DR. Patty
UNLESS OTHERWISE SPECIFIED TOLERANCES: .x ± 0.25 .xx ± 0.1 .xxx ± 0.05 ANGLE ± 1°			REV.	SHEET	CH. ERIC
A	1/1	DWG.NO:	A05I-M1xxHSR	AP.	