
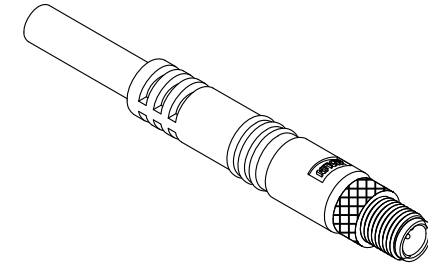


RoHS


IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	Dec/16/2014

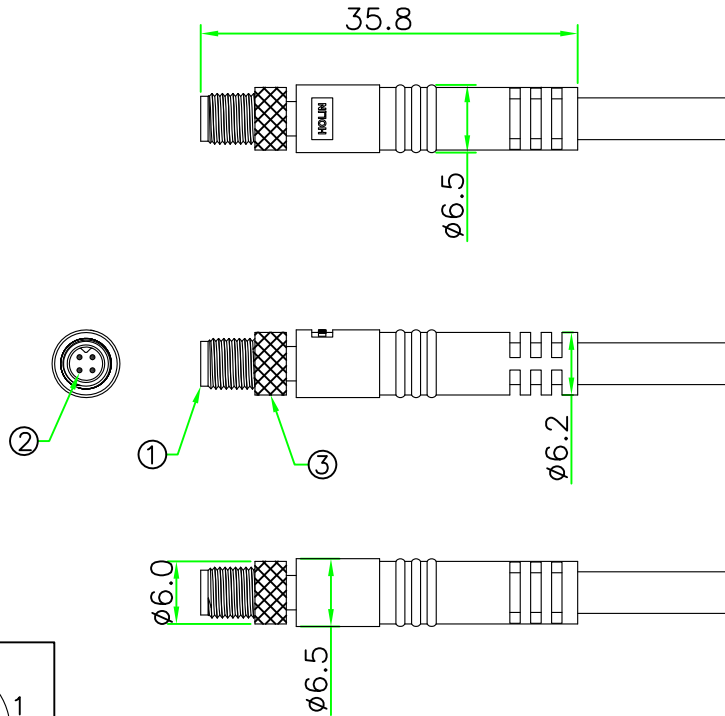

NOTES:

- ELECTRICAL CHARACTERISTICS:
 CURRENT RATING: 1 A
 TEMPERATURE RANGE: -20°C TO +80°C
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC FOR ONE MINUTE

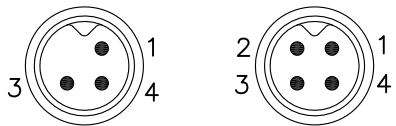

A05I-M103SM A05I-M104SM
 PIN ASSIGNMENT FRONT VIEW
 (前視圖)

*Cable specification and length can be customized.

4	RING NUT	BRASS, Nickel Plated.		1	
3	O-RING	VITON.	BLACK	1	
2	CONTACT	BRASS , Male pin ,6 u" Gold plated .		N	
1	CONNECTOR	M05 A-Coding Male Connector Insert.Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
	UNIT: mm	TITLE	M5 A-Coding Male molded cable Ass'y
SCALE	1.5:1	P/N:	A05I-M1xxSM
UNLESS OTHERWISE SPECIFIED TOLERANCES: .x ± 0.25 .xx ± 0.1 .xxx ± 0.05 ANGLE ± 1'		DR.	Patty
REV.	A	CH.	ERIC
	SHEET 1/1	AP.	
		DWG.NO:	A05I-M1xxSM