
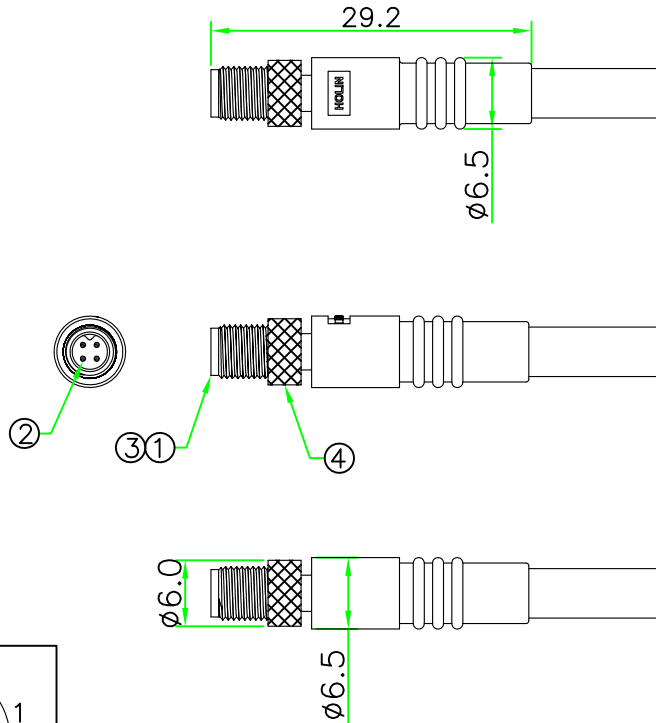


RoHS

IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	Feb/26/2015

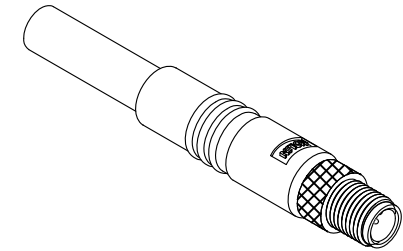

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 1A

TEMPERATURE RANGE: -20°C TO +80°C


DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A05I-M1xxSN

03 - 3 PINS

04 - 4 PINS

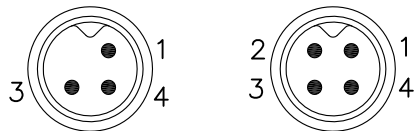

A05I-M103SN

A05I-M104SN

PIN ASSIGNMENT FRONT VIEW
(前視圖)

*Cable specification and length can be customized.

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE	M5 A-Coding Male molded cable Ass'y
SCALE	1.5:1	P/N:	A05I-M1xxSN
UNLESS OTHERWISE SPECIFIED TOLERANCES:		DR.	Patty
.X ± 0.25 .XX ± 0.1		CH.	ERIC
.XXX ± 0.05 ANGLE ± 1°		DWG.NO:	A05I-M1xxSN
REV.	A	SHEET	1/1

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
4	RING NUT	BRASS, Nickel Plated.		1	
3	O-RING	VITON.	BLACK	1	
2	CONTACT	BRASS , Male pin ,6 u" Gold plated .		N	
1	CONNECTOR	M05 A-Coding Male Connector Insert.Nylon+GF.	BLACK	1	