
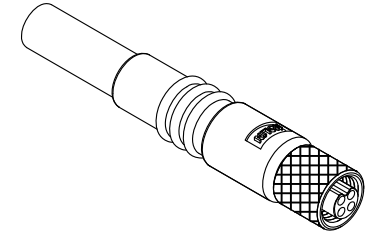


RoHS


IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	Feb/26/2015

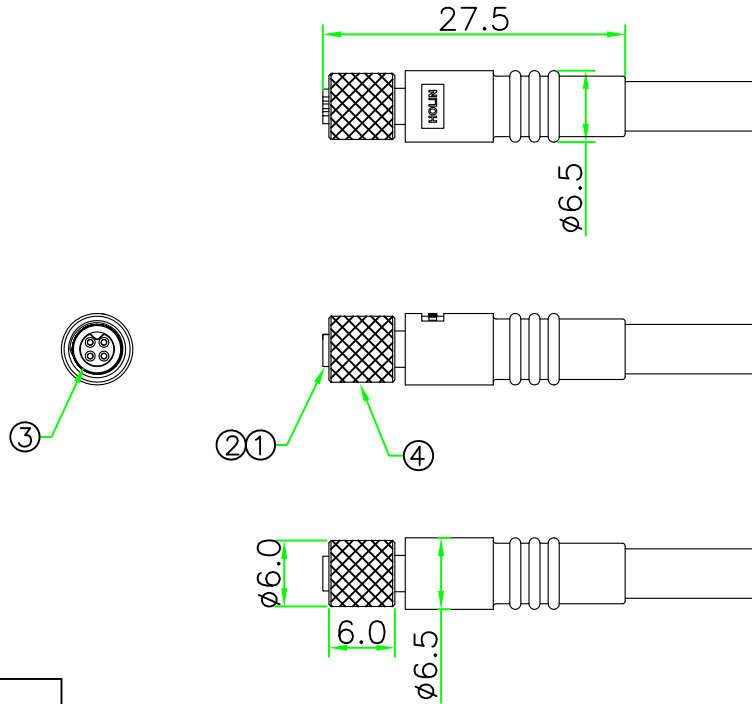

NOTES:

- ELECTRICAL CHARACTERISTICS:
 CURRENT RATING: 1A
 TEMPERATURE RANGE: -20°C TO +80°C
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC FOR ONE MINUTE
- HOW TO ORDER: A05I-M2xxSN
 03 - 3 PINS
 04 - 4 PINS

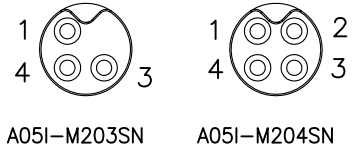

PIN ASSIGNMENT
FRONT VIEW
(前視圖)

*Cable specification and length can be customized.

4	RING NUT	BRASS, Nickel Plated.		1	
3	O-RING	VITON.	BLACK	1	
2	CONTACT	BRASS , Female pin ,6 u" Gold plated .		N	
1	CONNECTOR	M05 A-Coding Female Connector Insert.Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN [®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司		TITLE	
	UNIT: mm	M5 A-Coding Female molded cable Ass'y	
SCALE	1.5:1	P/N:	A05I-M2xxSN
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°			DR.
REV.	A	SHEET	1/1
DWG.NO:		A05I-M2xxSN	
		CH.	ERIC
		AP.	