



REV.	DESCRIPTION	DATE
A	ISSUE	Dec/25/2006

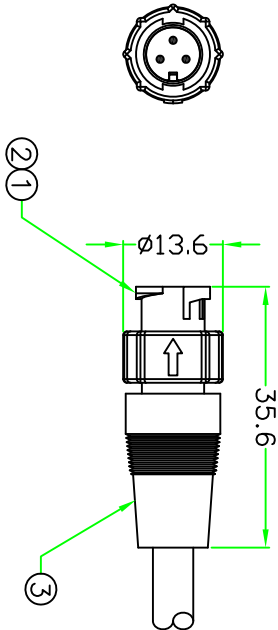


- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 2A / 5A
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: CAX-L1xxSN

- 02 - 2 PIN 05 - 5 PIN
- 03 - 3 PIN 06 - 6 PIN
- 04 - 4 PIN
- D - CURRENT RATING 5A
- N - CURRENT RATING 2A


Pin Assignment Front View




CAD-L102SN




CAD-L103SN



CAN-L104SN



CAN-L105SN



CAN-L106SN

3	OVERMOLD	PVC or PU	Black	1	
2	CONTACT	Brass, male pin , 6u" gold plating.		N	
1	CONNECTOR	Female connector, NYLON+GF.	Black	1	50-135
No.	PART NAME	DESCRIPTION	COLOR	QTY	REMARKS

SCALE UNLESS OTHERWISE SPECIFIED TOLERANCES: X ±0.25 XX ± 0.1 XXX ± 0.05 ANGLE ± 1&X REV. SHEET A 1/1		TITLE : CIRCULAR A SIZE MALE LOCK TYPE CABLE MOLDING CONNECTOR	
HOLIN ® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技 股份有限公司		P/N:	CAX-L1xxSN
DWG.NO: CAX-L1xxSN		DR: Jack	CH: ERJC
		AP:	