
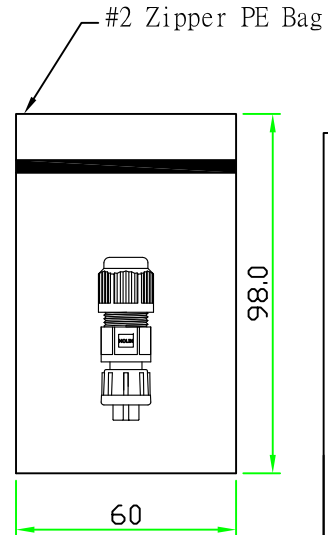
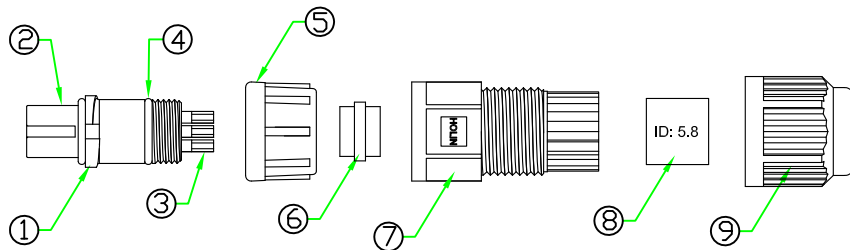
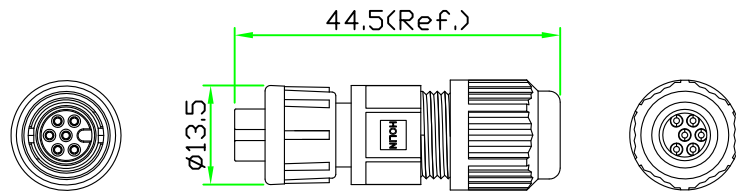


REV.	DESCRIPTION	DATE
A	ISSUE	Jul/15/2014



NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CAx-L2xxSA


02 - 2 PINS 05 - 5 PINS

03 - 3 PINS 06 - 6 PINS

04 - 4 PINS

D - CURRENT RATING 5A

N - CURRENT RATING 2A

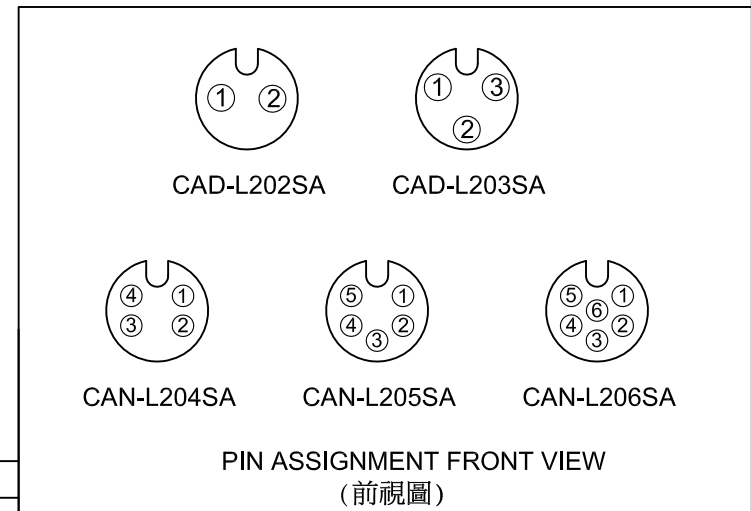

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	Circular A Size Lock Type Female Connector Female Pin Field Installable Plug
SCALE	1:1	P/N:	CAx-L2xxSA

UNLESS OTHERWISE SPECIFIED TOLERANCES:		DR. Patty
.x ± 0.25	.xx ± 0.1	
.xxx ± 0.05	ANGLE ± 1°	CH. ERIC
REV. A	SHEET 1/1	AP.

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
9	CLAMP NUT	NYLON+GF	BLACK	1	
8	TUBE	EPDM. (ID=5.8mm.)	BLACK	1	
7	HOOD	NYLON	BLACK	1	
6	GASKET	EPDM.	BLACK	1	
5	LOCK NUT	NYLON+GF	BLACK	1	
4	O-RING	Silcon.	BLACK	1	
3	CONTACT	Brass ,Female Pin. 6u"Gold Plated.		N	
2	CONNECTOR	A Size Female Connector Insert, NYLON+GF.		1	
1	O-RING	Silcon.	BLACK	1	

REV. A	SHEET 1/1	DWG.NO:	CAx-L2xxSA
--------	-----------	---------	------------