
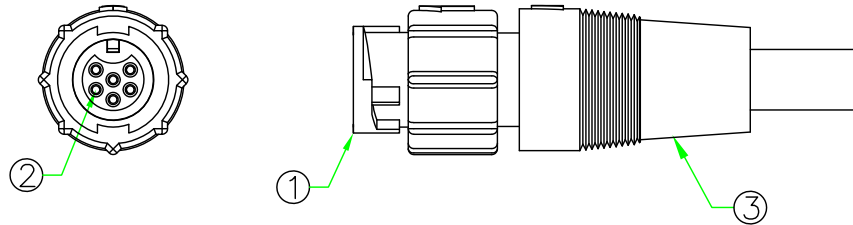
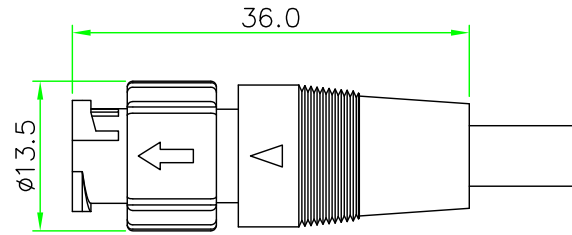


RoHS

IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	May/14/2015

Ref.

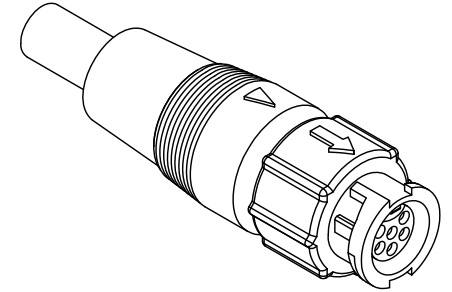

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CAX-L3xxSN

02 - 2 PIN 04 - 4 PIN
 03 - 3 PIN 05 - 5 PIN
 06 - 6 PIN

D - CURRENT RATING 5A
 N - CURRENT RATING 2A



HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
 禾凌科技股份有限公司

	UNIT: mm	TITLE :	Circular A Size Lock Type Male Connector Female Pin Molded Cable
SCALE	1.5:1	P/N:	CAX-L3xxSN
UNLESS OTHERWISE SPECIFIED TOLERANCES: .x ± 0.25 .xx ± 0.1 .xxx ± 0.05 ANGLE ± 1°	REV. A	SHEET 1/1	DR. Patty CH. ERIC AP.
REV. A	SHEET 1/1	DWG.NO:	CAX-L3xxSN

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
3	OVERMOLD	PVC or PU.	BLACK	1	
2	CONTACT	Brass, 6u" Gold Plated.Female Pin.		N	
1	CONNECTOR	A Size Male Connector Insert, NYLON+GF.	BLACK	1	