


RoHS

IP67

REV.	DESCRIPTION	DATE
A	ISSUE	Dec/25/2009

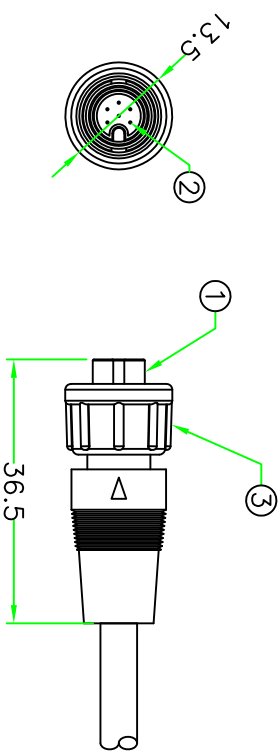

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 CURRENT RATING: 2A / 5A
 CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC FOR ONE MINUTE
 - HOW TO ORDER: CAX-L4xxSN

- 02 - 2 PIN 05 - 5 PIN
- 03 - 3 PIN 06 - 6 PIN
- 04 - 4 PIN
- D - CURRENT RATING 5A
- N - CURRENT RATING 2A

CAD-L402SN		CAD-L403SN		CAN-L404SN		CAN-L405SN		CAN-L406SN	
------------	--	------------	--	------------	--	------------	--	------------	--

Pin Assignment Front View

No.	PART NAME	DESCRIPTION	COLOR	QTY	REMARKS
3	LOCK NUT	Nylon+GF.	BLACK	1	CAN-LN K07(KH11133)
2	CONTACT	BRASS, Male Pin, 6u" Gold Plated.		N	M0.6SP121 -A
1	CONNECTOR	CAN FM Connector Insert. Nylon+GF.	BLACK	1	CAN-4FMIG K06(KH11132)
	PART NAME	DESCRIPTION	COLOR	QTY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
 禾 凌 科 技 股 份 有 限 公 司

TITLE : Circular A Size 6P Lock Type
 Female Connector Male Pin
 Straight Angle molded cable

UNLESS OTHERWISE SPECIFIED TOLERANCES: X ±0.25 XX ± 0.1 XXX ± 0.05 ANGLE ± 1°X	P/N:	CAX-L4xxSN	DR: Jack
REV. A	UNIT: mm	DWG.NO: CAX-L4xxSN	CH: ENGJE
SCALE 1:1	1/1		AP: