


RoHS
IP66~68


OLD P/N: CAx-P1xxQP
(原型號)

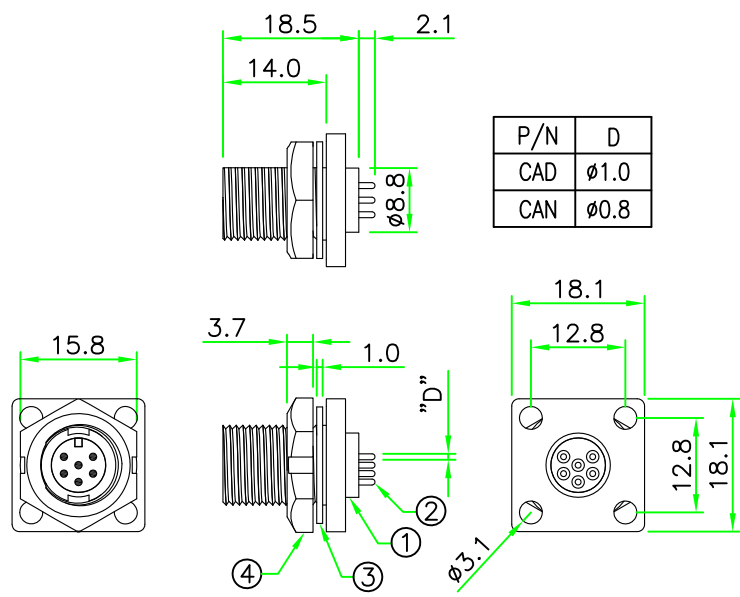

REV.	DESCRIPTION	DATE
A	ISSUE	Jan/14/2015

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 2A / 5A
CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - WITHOUT WATERPROOF CAP REQUEST:
PANEL THICKNESS MAX. 9.2mm
WITH WATERPROOF CAP REQUEST:
PANEL THICKNESS MAX. 5.0mm
 - HOW TO ORDER: CAx-P1xxQPR

- 02 - 2 PIN 04 - 4 PIN
 - 03 - 3 PIN 05 - 5 PIN
 - 06 - 6 PIN
- D - CURRENT RATING 5A
N - CURRENT RATING 2A

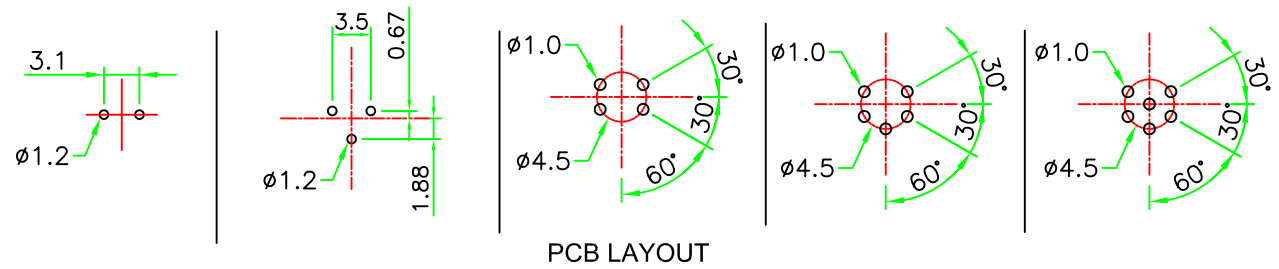

HOLIN[®] HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
4	HEX NUT	NYLON+GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated . Male Contact.		N	
1	CONNECTOR	A Size Male Connector Insert.NYLON+GF.	BLACK	1	

	UNIT: mm	TITLE Circular A Size Male Connector Male Pin Rear Mount Screw Type Square Flange PCB Pin	
SCALE	1:1	P/N: CAx-P1xxQPR	DR. Patty
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°			CH. ERIC
REV. A	SHEET 1/1	DWG.NO: CAx-P1xxQPR	AP.