


RoHS



IP67

REV. DESCRIPTION DATE

A ISSUE Dec/25/2006

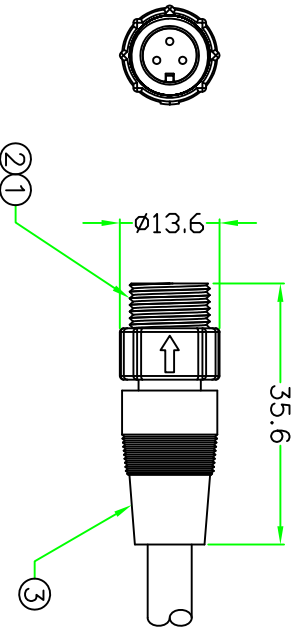

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 2A / 5A
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: CAX-P1xxSN

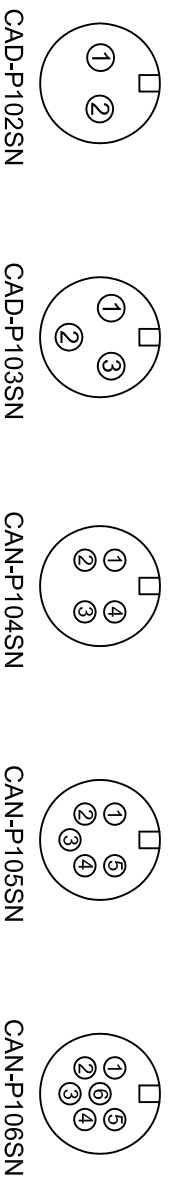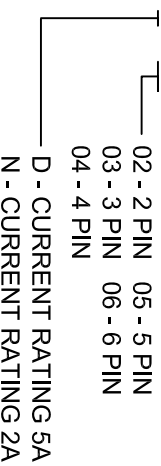

Pin Assignment Front View

3	OVERMOLD	PVC or PU	Black	1	
2	CONTACT	Brass, male pin , 6u” gold plating.		N	
1	CONNECTOR	Female connector, NYLON+GF.	Black	1	50-135-N1
No.	PART NAME	DESCRIPTION	COLOR	QTY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技 股份有限公司

TITLE : CIRCULAR A SIZE MALE SCREW TYPE
CABLE MOLDING CONNECTOR

SCALE 1:1 UNIT:mm

UNLESS OTHERWISE SPECIFIED TOLERANCES:
X ±0.25 XX ± 0.1
XXX ± 0.05 ANGLE ± 1&X

REV. A SHEET 1/1 DWG.NO: CAX-P1xxSN

P/N: CAX-P1xxSN DR: Jack
CH: E&JG AP: