


RoHS

IP67

REV.	DESCRIPTION	DATE
A	ISSUE	Dec/25/2009
A1	REMARKS NOTES CANCEL	Apr/22/2014

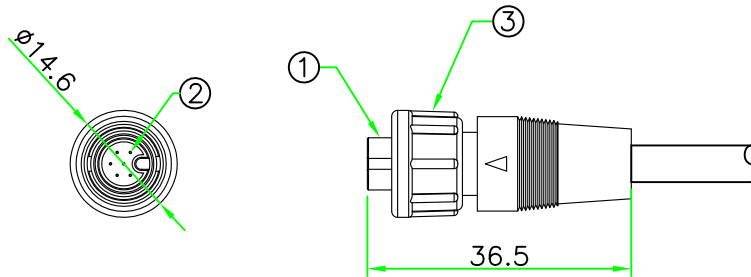

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CA_x-P4_{xx}SN


02 - 2 PIN 05 - 5 PIN

03 - 3 PIN 06 - 6 PIN


04 - 4 PIN

D - CURRENT RATING 5A


N - CURRENT RATING 2A




CAD-P402SN




CAD-P403SN



CAN-P404SN



CAN-P405SN



CAN-P406SN

Pin Assignment Front View

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
3	SCREW NUT	Nylon+GF.	BLACK	1	
2	CONTACT	BRASS, Male Pin, 6u" Gold Plated.		N	
1	CONNECTOR	CAN FM Connector Insert. Nylon+GF.	BLACK	1	

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	Circular A Size Screw Type Female Connector Male Pin Straight Angle molded cable
SCALE	1:1	P/N:	CA _x -P4 _{xx} SN
UNLESS OTHERWISE SPECIFIED TOLERANCES: x ±0.25 xx ±0.1 xxx ±0.05 ANGLE ±1°X		DWG.NO:	CA _x -P4 _{xx} SN
REV. A1	SHEET 1/1	DR.	Patty
		CH.	ERIC
		AP.	