
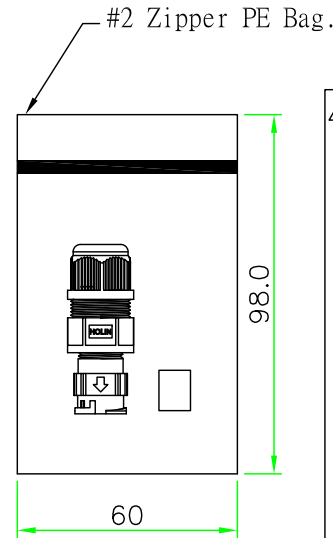
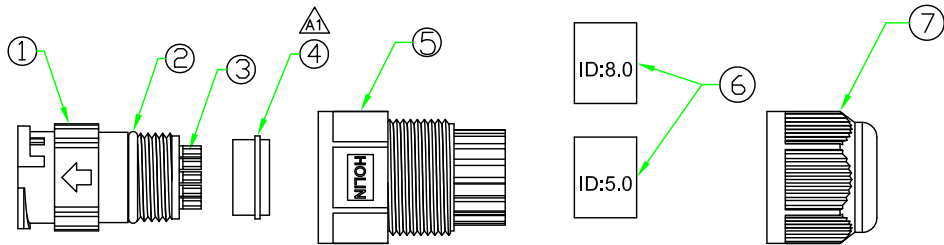
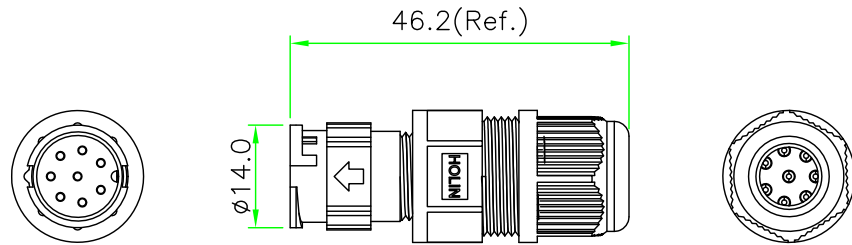


RoHS



REV.	DESCRIPTION	DATE
A	ISSUE	Sep/04/2008
A1	Change ④Shape And Add Pin Assignment	Jun/17/2014

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A /10A

CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C


DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CBx-L1xxSA

- 02 - 2 PIN 07 - 7 PIN
- 03 - 3 PIN 08 - 8 PIN
- 04 - 4 PIN 10 - 10 PIN
- 05 - 5 PIN 12 - 12 PIN
- 06 - 6 PIN

- P - CURRENT RATING 10A
- D - CURRENT RATING 5A
- N - CURRENT RATING 2A

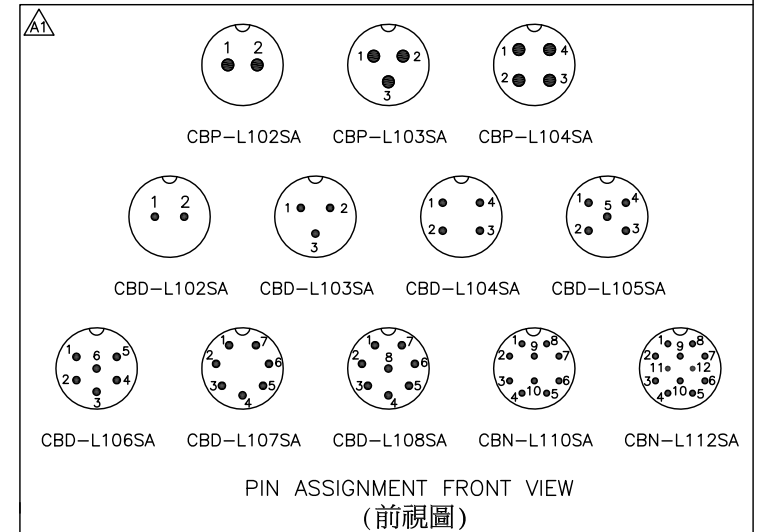

7	CLAMP NUT	NYLON+GF	BLACK	1	
6	TUBE	EPDM, (ID= 5.0 & 8.0mm.)	BLACK	2	
5	HOOD	NYLON	BLACK	1	
4	GASKET	EPDM.	BLACK	1	
3	CONTACT	Brass ,Male Pin. 6u"Gold Plated.		1	
2	O-RING	NBR.	BLACK	1	
1	CONNECTOR	B Size Male Connector Insert, NYLON+GF.		1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

**HOLIN**® HTP ASIA TECHNOLOGY CO., LTD.  
禾凌科技股份有限公司

	UNIT: mm	TITLE :	Circular B Size Lock Type Male Connector Male Pin Field Installable Plug	
SCALE	1:1	P/N:	CBx-L1xxSA	DR. Patty
UNLESS OTHERWISE SPECIFIED TOLERANCES:				CH. ERIC
x ±0.25 xx ±0.1				
xxx ±0.05 ANGLE ±1°				
REV.	A1	SHEET	1/1	AP.
		DWG.NO:	CBx-L1xxSA	