
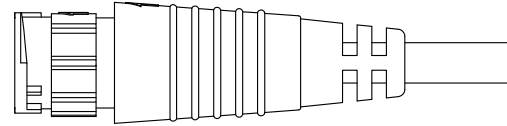

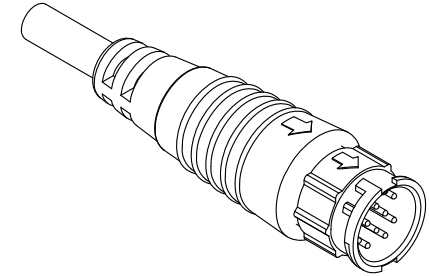


RoHS

IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	Nov/26/2014

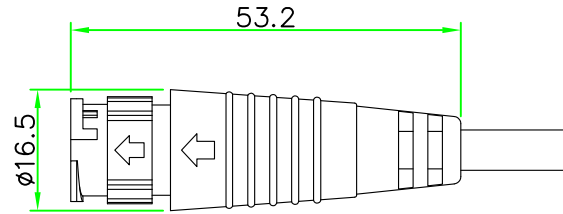


NOTES:

- ELECTRICAL CHARACTERISTICS:
 CURRENT RATING: 2A \ 5A \ 10A
 CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC FOR ONE MINUTE
- HOW TO ORDER: CB_x-L1_{xx}SM

- 02 - 2 PIN 07 - 7 PIN
- 03 - 3 PIN 08 - 8 PIN
- 04 - 4 PIN 10 - 10 PIN
- 05 - 5 PIN 12 - 12 PIN
- 06 - 6 PIN

- P - CURRENT RATING 10A
- D - CURRENT RATING 5A
- N - CURRENT RATING 2A

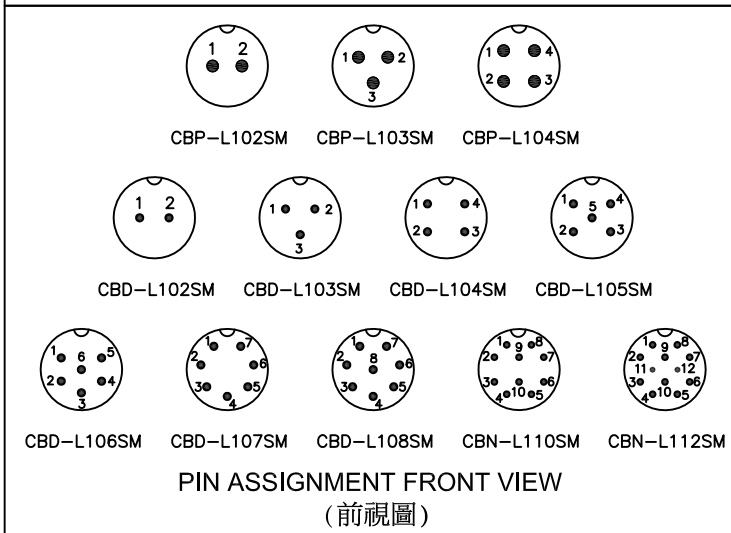

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
 禾凌科技股份有限公司

	UNIT: mm	TITLE :	Circular B Size Lock Type Male Connector Male Pin Molded Cable
SCALE	1:1	P/N:	CBx-L1xxSM
UNLESS OTHERWISE SPECIFIED TOLERANCES: .x ± 0.25 .xx ± 0.1 .xxx ± 0.05 ANGLE ± 1°		DWG.NO:	CBx-L1xxSM
REV.	A	SHEET	1/1
DR.	Patty	CH.	ERIC
AP.			

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
3	OVERMOLD	PVC or PU.	BLACK	1	
2	CONTACT	Brass ,Male Pin. 6u" Gold Plated.		N	
1	CONNECTOR	B Size Male Connector Insert, NYLON+GF.	BLACK	1	