
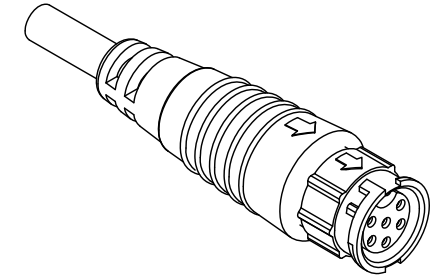
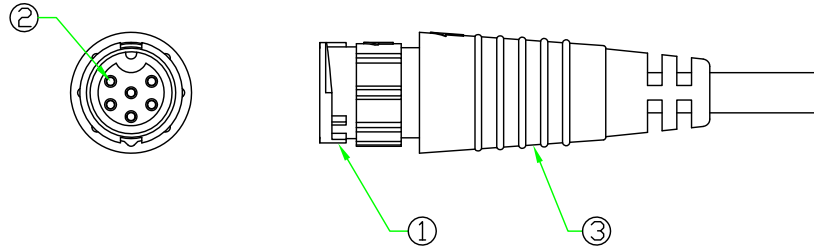


RoHS

IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	May/20/2015

Ref.

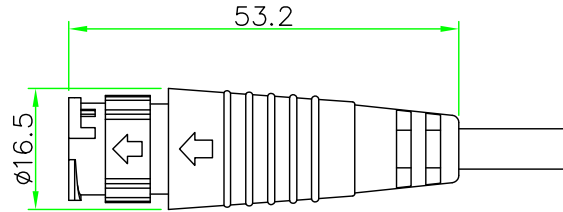

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 5A / 10A

CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CB_x-L3xxSM

02 - 2 PIN

03 - 3 PIN


04 - 4 PIN

05 - 5 PIN

06 - 6 PIN

P - CURRENT RATING 10A

D - CURRENT RATING 5A

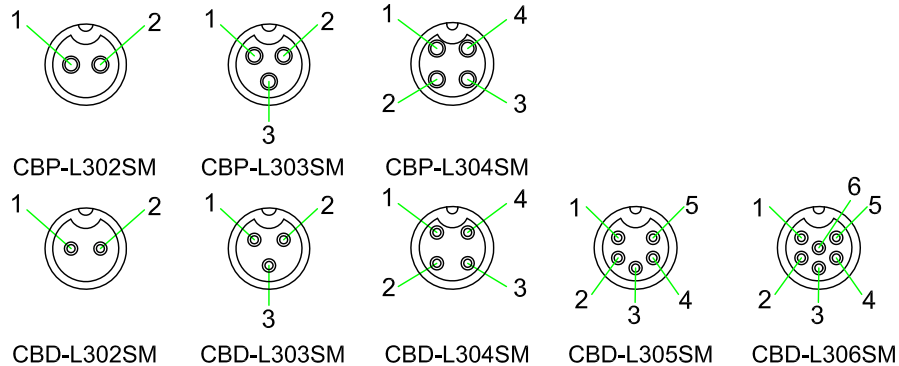

PIN ASSIGNMENT FRONT VIEW
(前視圖)

3	OVERMOLD	PVC or PU.	BLACK	1	
2	CONTACT	Brass ,Female Pin. 6u" Gold Plated.		N	
1	CONNECTOR	B Size Male Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN [®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司		TITLE : Circular B Size Lock Type Male Connector Female Pin Molded Cable	
UNIT: mm	SCALE	1:1	P/N: CB _x -L3xxSM
UNLESS OTHERWISE SPECIFIED TOLERANCES: .x ± 0.25 .xx ± 0.1 .xxx ± 0.05 ANGLE ± 1°		REV. A	DR. Patty
SHEET 1/1		DWG.NO: CB _x -L3xxSM	CH. ERIC
			AP.