
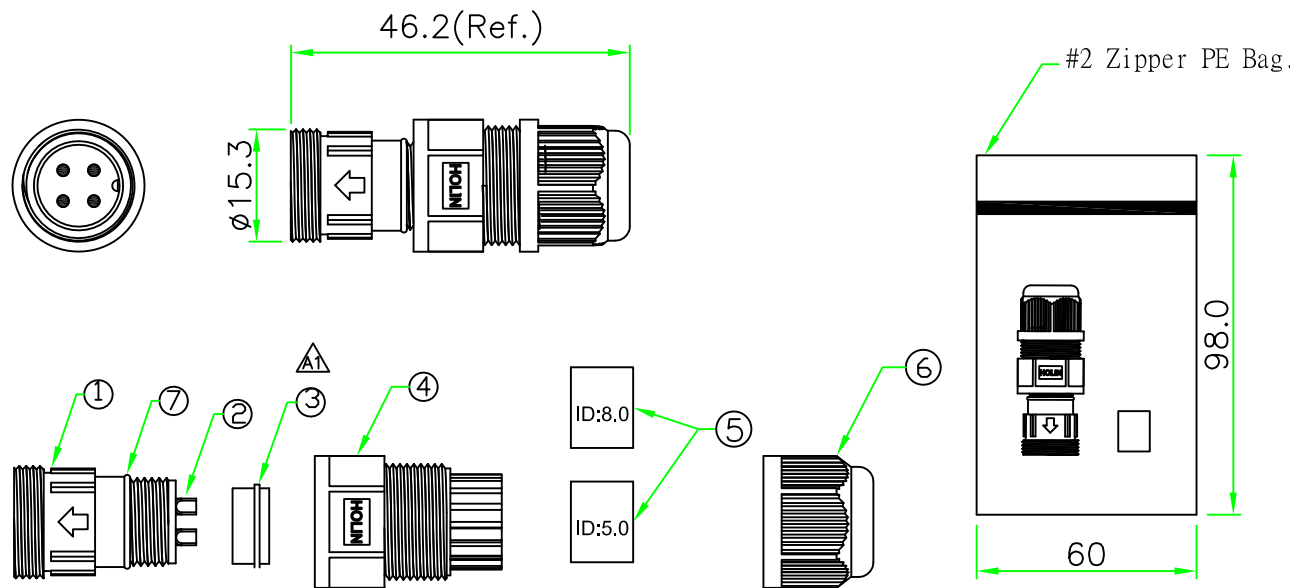


RoHS
IP66~68



REV.	DESCRIPTION	DATE
A	ISSUE	Jan/07/2010
A1	Change ③Shape And Add Pin Assignment	Aug/29/2014

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A / 10A

CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE


2. HOW TO ORDER: CBx-P1xxSA

- 02 - 2 PIN 07 - 7 PIN
- 03 - 3 PIN 08 - 8 PIN
- 04 - 4 PIN 10 - 10 PIN
- 05 - 5 PIN 12 - 12 PIN
- 06 - 6 PIN

P - CURRENT RATING 10A

D - CURRENT RATING 5A

N - CURRENT RATING 2A

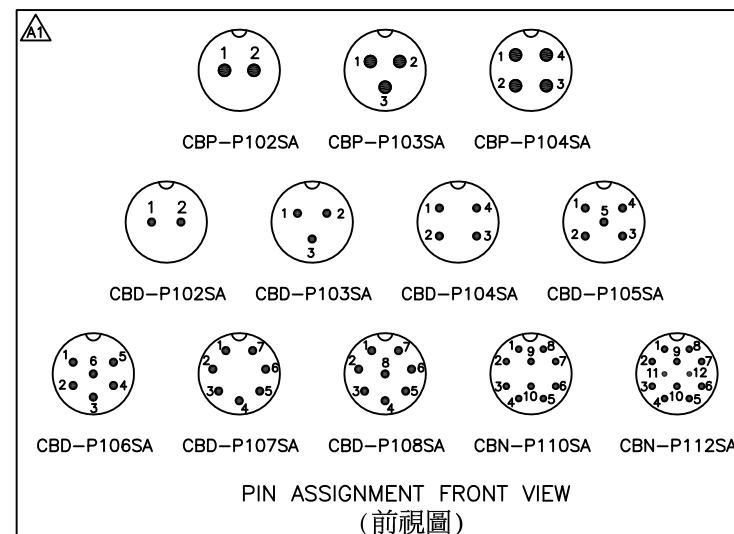

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

UNIT: mm TITLE : Circular B Size Screw Type Male Connector Male Pin Field Installable Plug

UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°		P/N: CBx-P1xxSA	DR. Patty
REV. A1	SHEET 1/1		CH. ERIC
DWG.NO: CBx-P1xxSA		AP.	

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
7	O-RING	NBR.	BLACK	1	
6	CLAMP NUT	NYLON+GF.	BLACK	1	
5	TUBE	EPDM, (ID= 5.0 & 8.0mm.)	BLACK	2	
4	HOOD	NYLON	BLACK	1	
3	GASKET	RUBBER.	BLACK	1	
2	CONTACT	BRASS ,Male Pin. 6u" Gold Plated.		N	
1	CONNECTOR	B Size Male Connector Insert, NYLON+GF.	BLACK	1	