
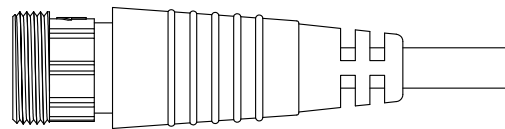

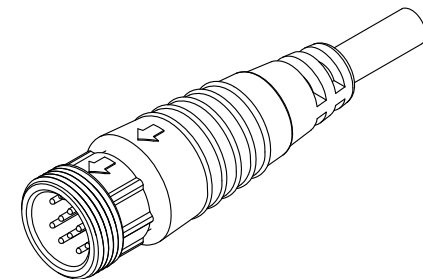


RoHS

IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	Nov/27/2014

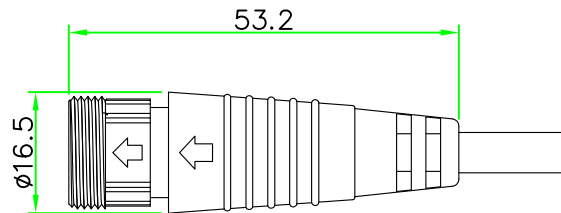

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A \ 5A \ 10A

CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CBx-P1xxSM

- 02 - 2 PIN 07 - 7 PIN
- 03 - 3 PIN 08 - 8 PIN
- 04 - 4 PIN 10 - 10 PIN
- 05 - 5 PIN 12 - 12 PIN
- 06 - 6 PIN

P - CURRENT RATING 10A

D - CURRENT RATING 5A

N - CURRENT RATING 2A

CBP-P102SM	CBP-P103SM	CBP-P104SM		
CBD-P102SM	CBD-P103SM	CBD-P104SM	CBD-P105SM	
CBD-P106SM	CBD-P107SM	CBD-P108SM	CBN-P110SM	CBN-P112SM

PIN ASSIGNMENT FRONT VIEW
(前視圖)

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	Circular B Size Screw Type Male Connector Male Pin Molded Cable
SCALE	1:1	P/N:	CBx-P1xxSM
UNLESS OTHERWISE SPECIFIED TOLERANCES: .x ± 0.25 .xx ± 0.1 .xxx ± 0.05 ANGLE ± 1°		DWG.NO:	CBx-P1xxSM
REV.	A	SHEET	1/1
		DR.	Patty
		CH.	ERIC
		AP.	

3	OVERMOLD	PVC or PU.	BLACK	1	
2	CONTACT	Brass ,Male Pin. 6u" Gold Plated.		N	
1	CONNECTOR	B Size Male Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS