



REV.	DESCRIPTION	DATE
A	ISSUE	Sep/22/2007

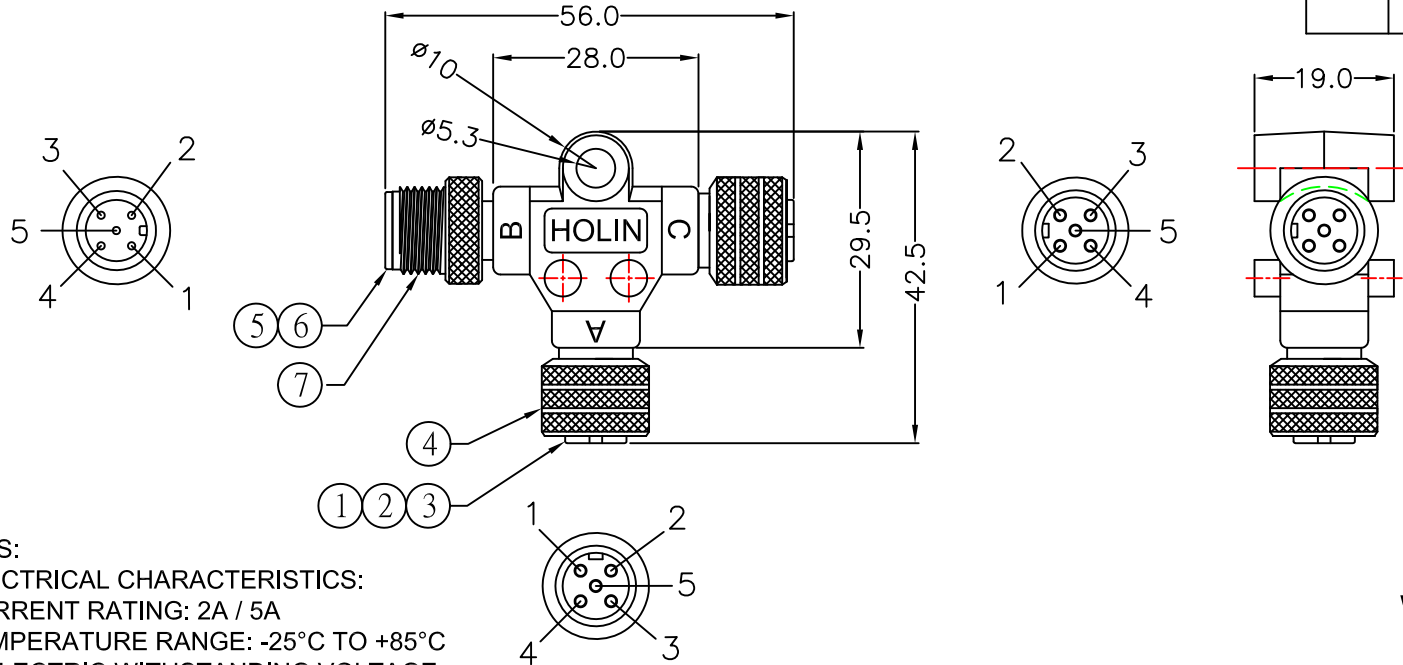


NOTES:

1. ELECTRICAL CHARACTERISTICS:  
 CURRENT RATING: 2A / 5A  
 TEMPERATURE RANGE: -25°C TO +85°C  
 DIELECTRIC WITHSTANDING VOLTAGE:  
 500V AC FOR ONE MINUTE

2. HOW TO ORDER: 12T-Mxxxxxx



WIRING DIAGRAM

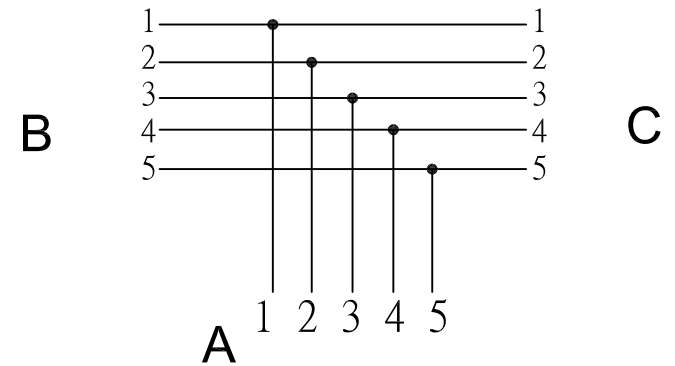

7	RING NUT	BRASS, NICKEL PLATED,		1	
6	CONTACT	BRASS , 6 u" Gold plated .Male Contact.		N	
5	CONNECTOR	NYLON+GF, M12 Male 5 Pin connector	BLACK	1	
4	RING NUT	BRASS , NICKEL PLATED.		2	
3	O-RING	VITON,	BLACK	2	
2	CONTACT	BRASS , 6 u" Gold plated .Female Contact.		N	
1	CONNECTOR	NYLON+GF, M12 Female 5 Pin connector	BLACK	2	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

**HOLIN®** HTP ASIA TECHNOLOGY CO., LTD.  
 禾凌科技股份有限公司

	UNIT: mm	TITLE :	
SCALE	1:1	M12 T ADAPTER	
UNLESS OTHERWISE SPECIFIED TOLERANCES: X ±0.25 XX ±0.1 XXX ±0.05 ANGLE ±1°X		P/N:	12T-Mxxxxxx
REV.	A	DR.	Jack
SHEET	1/1	CH.	HENRY
DWG.NO:	12T-Mxxxxxx	AP.	