

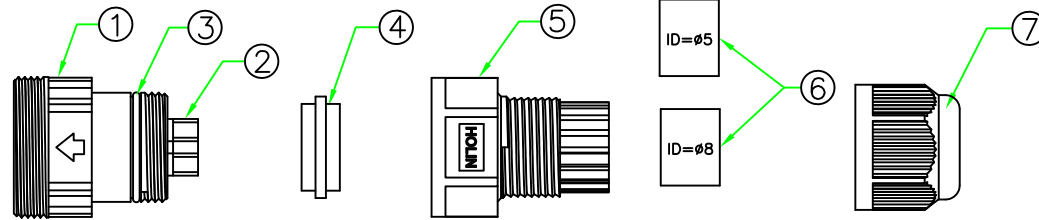


**RoHS**  
**IP66~68**

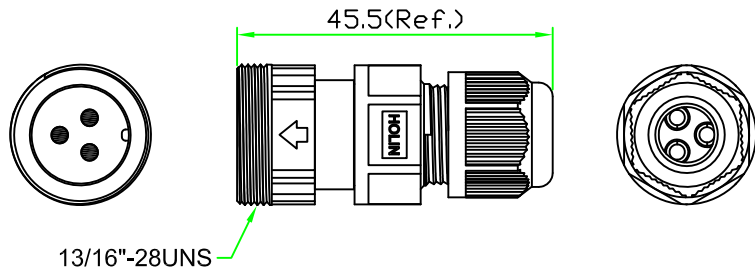


REV.	DESCRIPTION	DATE
A	ISSUE	Nov/09/2015




- NOTES:
- ELECTRICAL CHARACTERISTICS:  
CURRENT RATING: 2A / 5A / 10A / 20A  
CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C  
DIELECTRIC WITHSTANDING VOLTAGE:  
500V AC FOR ONE MINUTE
  - HOW TO ORDER: CCx-P1xxSA

#2 Zipper PE Bag

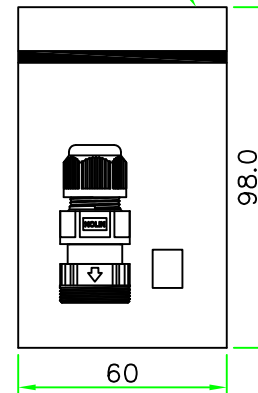

- 02 - 2 PIN
- 03 - 3 PIN
- 04 - 4 PIN
- 05 - 5 PIN
- 06 - 6 PIN
- 09 - 9 PIN
- 10 - 10 PIN
- 12 - 12 PIN
- 14 - 14 PIN
- 18 - 18 PIN

- G - CURRENT RATING 20A
- P - CURRENT RATING 10A
- D - CURRENT RATING 5A
- N - CURRENT RATING 2A

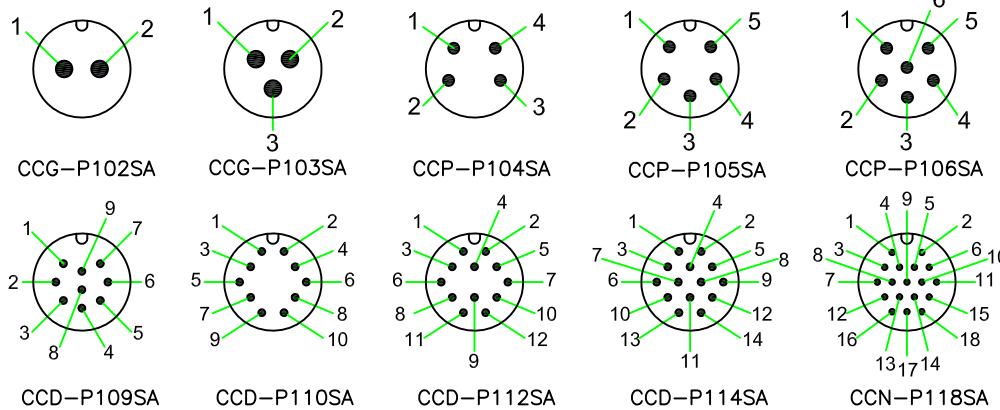

PIN ASSIGNMENT FRONT VIEW (前視圖)

7	CLAMP NUT	NYLON+GF.	BLACK	1	
6	TUBE	Rubber ( ID= 5.0 & 8.0mm)	BLACK	2	
5	HOOD	NYLON.	BLACK	1	
4	GASKET	EPDM.	BLACK	1	
3	O-RING	NBR.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold Plated. Male Contact.		N	
1	CONNECTOR	C Size Male Connector Insert. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN <sup>®</sup> HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE :	Circular C Size Screw Type Male Connector Male Pin Field Installable Plug		
SCALE	1:1	P/N:	CCx-P1xxSA	DR.	Patty
UNLESS OTHERWISE SPECIFIED TOLERANCES: .x ± 0.5 .xx ± 0.25 .xxx ± 0.1 ANGLE ± 1°		DWG.NO:	CCx-P1xxSA	CH.	ERIC
REV.	SHEET	A 1/1		AP.	