



RoHS

IP66~68

REV.	DESCRIPTION	DATE
A	ISSUE	Nov/09/2015


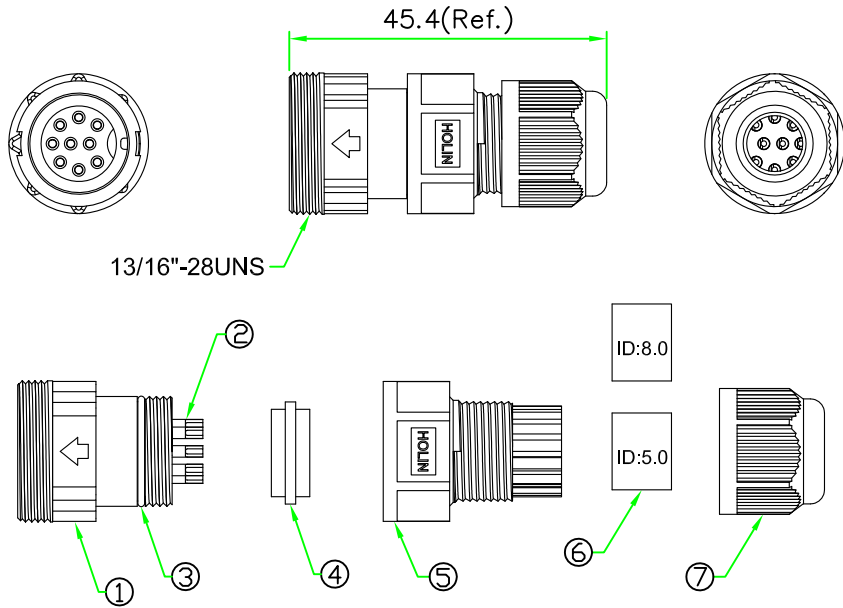


NOTES:

- ELECTRICAL CHARACTERISTICS:
 CURRENT RATING: 5A / 10A / 20A
 CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC FOR ONE MINUTE
- HOW TO ORDER: CCx-P3xxSA

- 03 - 3 PIN
- 05 - 5 PIN
- 09 - 9 PIN

- G - CURRENT RATING 20A
- P - CURRENT RATING 10A
- D - CURRENT RATING 5A

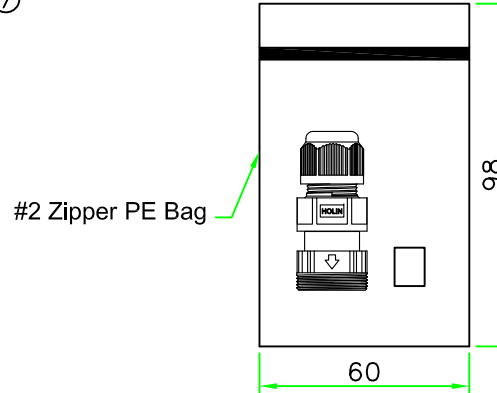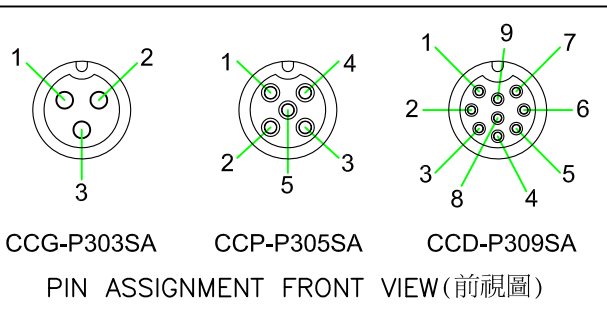

7	CLAMP NUT	NYLON+GF.	BLACK	1	
6	TUBE	Rubber (ID= 5.0 & 8.0mm)	BLACK	2	
5	HOOD	NYLON.	BLACK	1	
4	GASKET	EPDM.	BLACK	1	
3	O-RING	NBR.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	C Size Male Connector Insert. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.		禾凌科技股份有限公司	
	UNIT: mm	TITLE :	Circular C Size Screw Type Male Connector Female Pin Field Installable Plug
SCALE	1:1	P/N:	CCx-P3xxSA
UNLESS OTHERWISE SPECIFIED TOLERANCES: .x ± 0.5 .xx ± 0.25 .xxx ± 0.1 ANGLE ± 1'		DR.	Patty
REV.	SHEET	CH.	ERIC
A	1/1	DWG.NO:	CCx-P3xxSA
		AP.	