



REV.	DESCRIPTION	DATE
A	ISSUE	Apr/04/2012

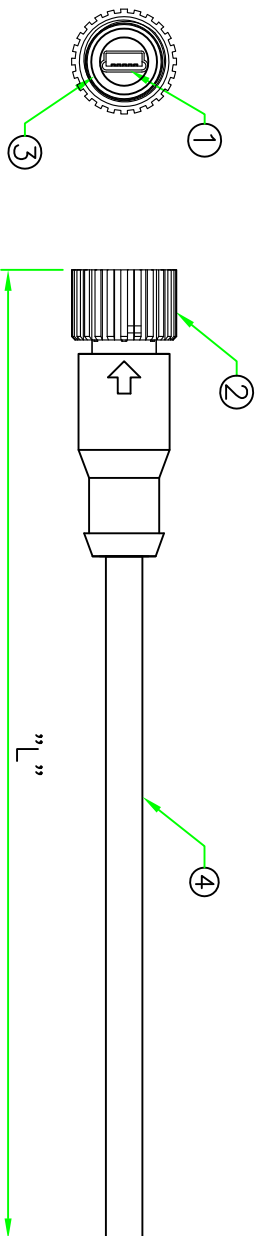

**RoHS**

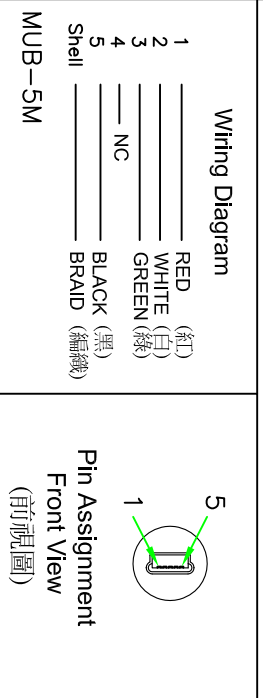

4	CABLE	USB 2.0 28AWGX2C+20AWGX2C, Jacket Black PVC, OD: 5.2mm.	BLACK	1	
3	O-RING	NBR.	BLACK	1	O-5516-N70
2	RING NUT	NYLON+GF.	BLACK	1	M12F-PN (70-135-N8)
1	CONNECTOR	MINI USB B TYPE MALE 5 Pin Connector.	BLACK	1	
No.	PART NAME	DESCRIPTION			

- Specification:
1. Current rating : 1A Max.
  2. Dielectric withstanding voltage : 500V(AC) for 1 minute.
  3. Contact resistance : 30mW Max.
  4. Insulation resistance : 1000MW Min. at DC 500V.
  5. Temperature range : -20°C ~ +80°C.
  6. IP rate : IP 66 ~ IP68.

- HOW TO ORDER:
- MUB-□4□□-xxM  
1 2345 6
- 1- Mini USB B Type
  - 2- M: Metal Ring Nut.
  - 3- 4: Female Ring Nut.
  - 4- S: Straight Angle. R: Right Angle.
  - 5- N: w/o SR. M: w/SR.
  - 6- Length. (01M=1M,.....)

**HOLIN**® HTP ASIA TECHNOLOGY CO., LTD.  
禾凌科技股份有限公司

SCALE	UNIT: mm	TITLE	DR. jaczk
1:1		Mini USB B 5M S/T Molded cable	CH. £RJJC
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N:	MUB-P4SN-xxM
X	±0.25	XX	± 0.1
XXX	± 0.05	ANGLE	± 1°X
REV.	SHEET	DWG. NO:	AP.
A	1/1	MUB-P4SN-xxM	