
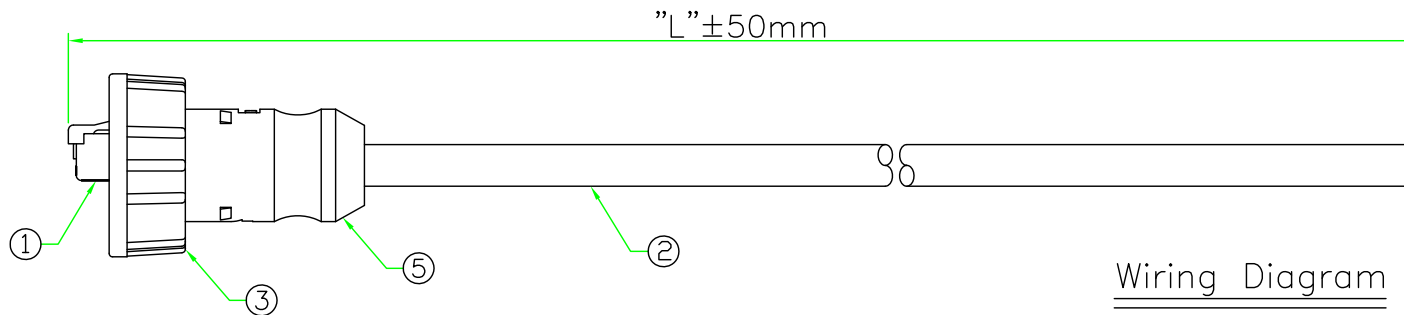
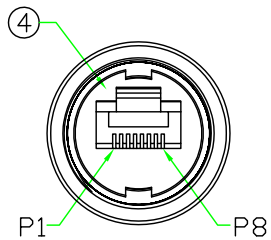
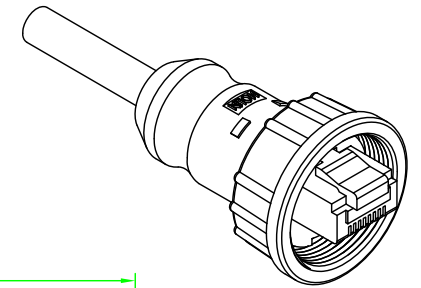



RoHS

IP66~68


REV.	DESCRIPTION	DATE
A	ISSUE	Jan/15/2015
A1	Correct PLUG gold plated	Jul/28/2015
A2	Correct overmold dimension	Oct/12/2015

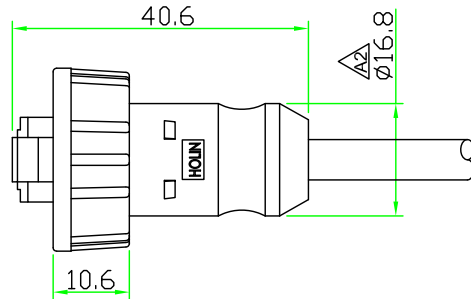

Wiring Diagram

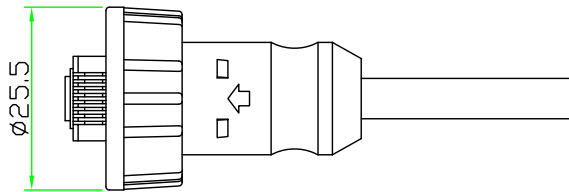

RJ45 PLUG

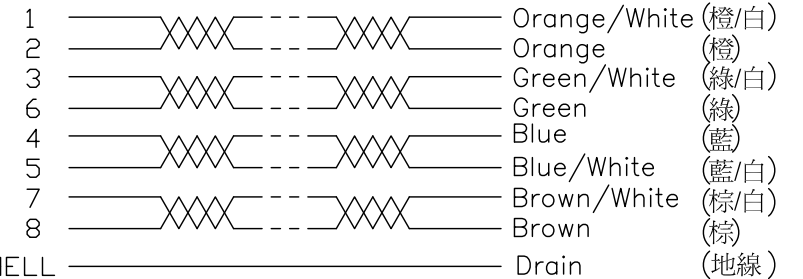

OLD P/N:RJ45C-S1S1SN-xM
(原型号)

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
5	OVER MOLDED	PVC	BLACK	1	
4	GASKET	RUBBER	BLACK	1	
3	SCREW NUT	NYLON+GF.	BLACK	1	
2	CABLE	CAT. 5E 24AWG x 4P, FTP, OD: 5.8mm.	BLACK	1	
1	PLUG	RJ-45 8P8C Shielded Plug. 3u" Gold Plated. $\Delta 1$		1	

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	RJ45 Plug C Size Screw Type Molded Cable
SCALE	1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N:	RJ45C-P4SN-xxM
.x ± 0.25	.xx ± 0.1	DR.	Patty
.xxx ± 0.05	ANGLE ± 1°	CH.	ERIC
REV.	SHEET	DWG.NO:	AP.
A2	1/1	RJ45C-P4SN-xxM	