

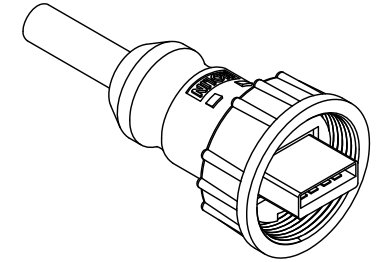


RoHS
IP66~68

REV	DESCRIPTION	DATE
A	ISSUE	NOV/05/2008
A1	Changing part number.	OCT/04/2012
A2	Correct P/N & DWG NO	OCT/22/2013
A3	Add Mark ④	JUN/11/2014
B	Change ②Shape	DEC/12/2014

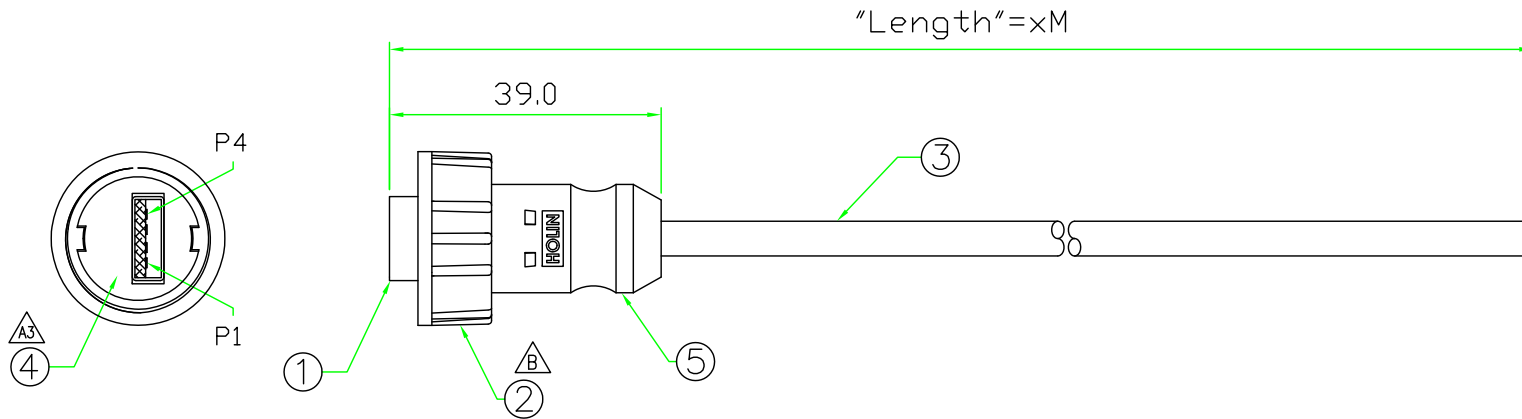

Wiring Diagram

- 1 ——— RED(24AWG) 紅
- 2 ——— WHITE(28AWG) 白
- 3 ——— GREEN(28AWG) 綠
- 4 ——— BLACK(24AWG) 黑
- SHELL ——— DRAIN 地線

5	OVERMOLD	PVC	BLACK	1	
4	GASKET	Rubber.	BLACK	1	
3	CABLE	UL2725 28AWGx1P+24AWGx2C+DRAIN+AL/MYLAR+BRAID	BLACK	1	
2	SCREW NUT	NYLON+GF.	BLACK	1	
1	CONNECTOR	USB A Type Male Connector.	WHITE	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN[®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE : USB 2.0 A Type Male C Size Screw Type Molded Cable			
SCALE	1:1				
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°		P/N:	A2 USB2AC-P4SN-xxM		DR. Patty
REV.	SHEET	DWG.NO:	A2 USB2AC-P4SN-xxM		CH. ERIC
B	1/1			AP.	