
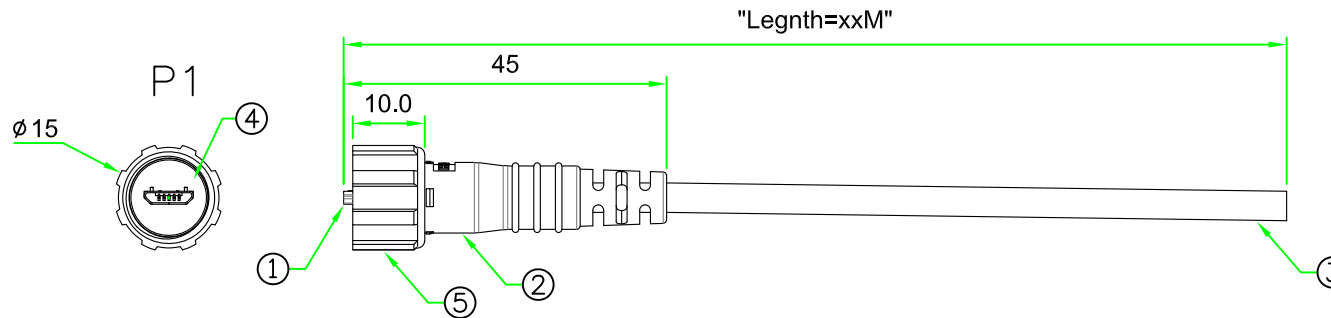




RoHS

IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/11/2018

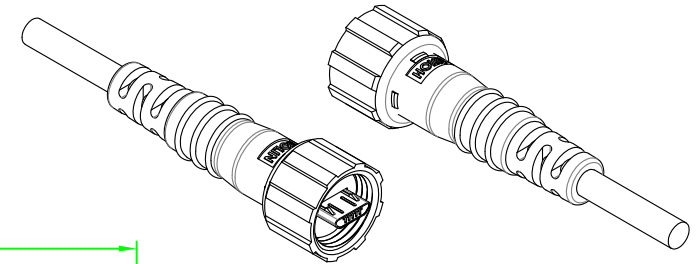

WIRING DIAGRAM

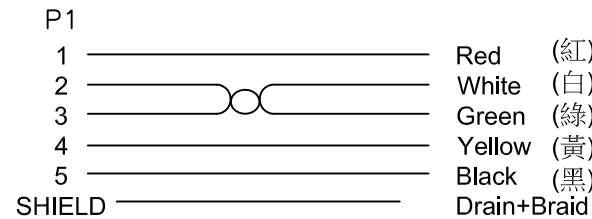

PIN ASSIGNMENT
FRONT VIEW
(前視圖)

5	SCREW NUT	Nylon+GF.	BLACK	1	
4	GASKET	EPDM.	BLACK	1	
3	CABLE	UL2725 28AWGx3C+28AWGx1P+Al/Mylar+Drain+Braid. OD:4.0mm. PVC Jacket.	BLACK	1	
2	OVERMOLD	PVC.	BLACK	1	
1	CONNECTOR	Micro USB B Male 2.0, 30u" Gold Plating Contacts.		1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN [®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司	
	UNIT: mm
SCALE	1:1
TITLE: Micro USB B Type Male Screw Lock Molded Cable	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .x ± 0.25 .xx ± 0.1 .xxx ± 0.05 ANGLE ± 1°	
REV. A	SHEET 1/1
P/N: USBMCB12-P4SM-xxM	DR. SIBYL CH. ERIC
DWG.NO: USBMCB12-P4SM-xxM	AP.