
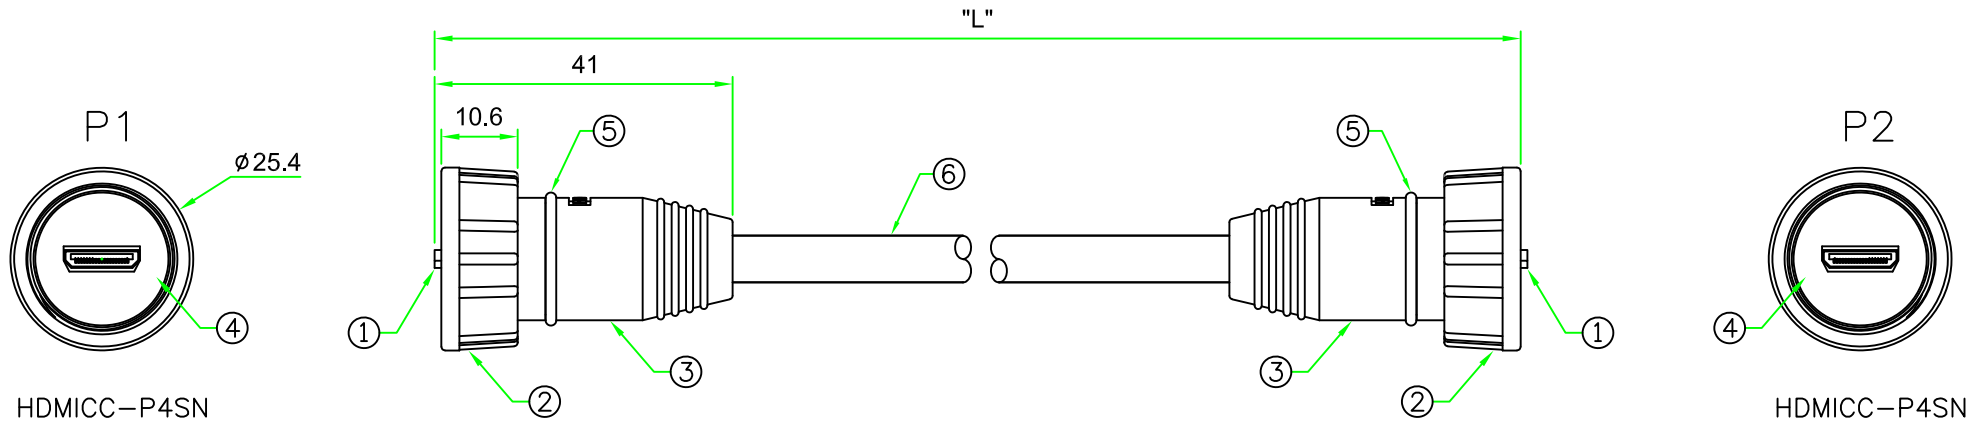


RoHS



IP66

HDMI  
HIGH-DEFINITION MULTIMEDIA INTERFACE

REV.	DESCRIPTION	DATE
A	ISSUE	Nov/02/2018

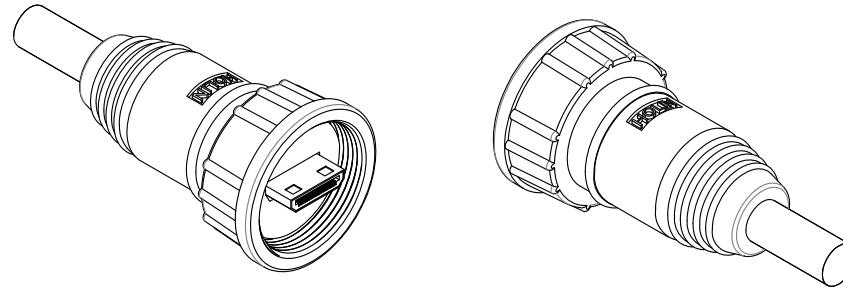

WIRING DIAGRAM

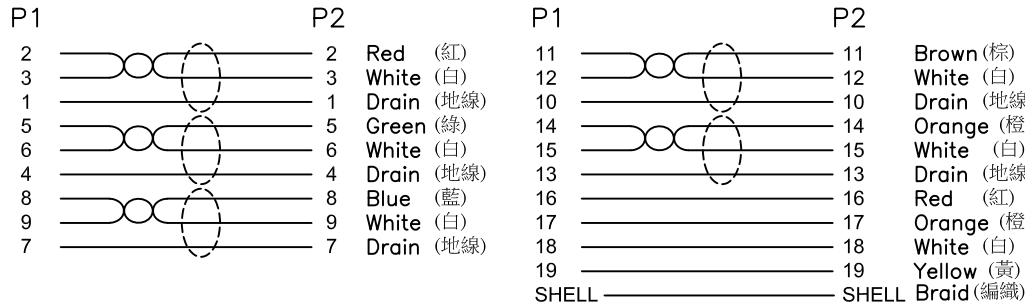

P/N	L
WHDMICC-PA-2M	2000±100
WHDMICC-PA-5M	5000±200

**HOLIN®** HTP ASIA TECHNOLOGY CO., LTD.  
禾凌科技股份有限公司

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
6	CABLE	UL20276 (30AWGx1P+AL+D+MY)x5C+(30AWGx4C)+AI+Braid OD:6.5mm	BLACK	1	
5	O-RING	EPDM.	BLACK	2	
4	GASKET	EPDM.	BLACK	2	
3	OVERMOLD	PU.	BLACK	2	
2	SCREW NUT	Nylon+GF.	BLACK	2	
1	CONNECTOR	HDMI C Type 19P Male solder connector. Gold Flash.		2	

UNIT: mm SCALE 1:1	TITLE: HDMI C Type C Size Screw Type 19P Male Molded Cable P/N: WHDMICC-PA-xxM DWG.NO: WHDMICC-PA-xxM	DR. SIBYL CH. ERIC AP.
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1° REV. A SHEET 1/1		