


X-Lok Series

Mini Size


Alternative Solution to M12

Push Lock Design

Plastic and Metal **NEW**

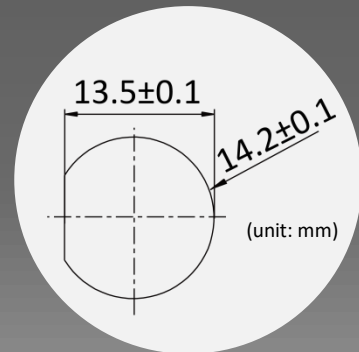

- Blind mating & audio feedback
- Salt spray up to 1000h (mated)
- EMC shielding (stainless steel available)
- Power AC/DC, data, signal or hybrid
- Up to 33 contacts / high speed data transmission
- Robust, secure and reliable for harsh environments

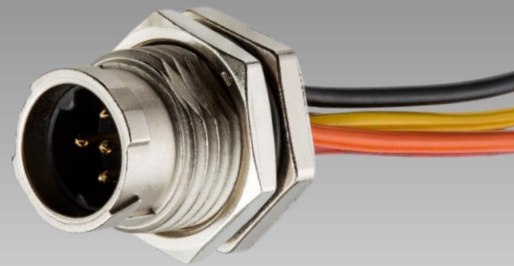

Amphenol LTW

X-Lok Push Lock Series

Blind Mating & Audio Feedback



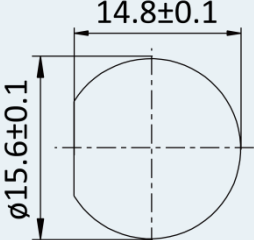

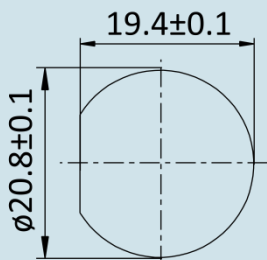

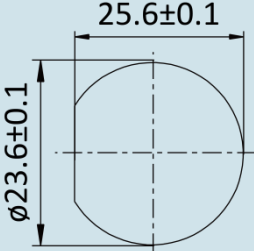

Product Overview

Amphenol LTW's X-Lok Series connectors available in metal or plastic are presented in various sizes for power, data, signal or hybrid for fast, robust, simple, secure and reliable connections. Featuring a push lock mechanism for intuitive mating with audible and tactile feedback.

The X-Lok Series are foolproof, intuitive and enable quicker installation than traditional threaded solutions. With UL1977 & 2238+50e certification, ALTW's X-Lok is your ideal solution for outdoor applications.

Panel cut out:

(unit: mm)

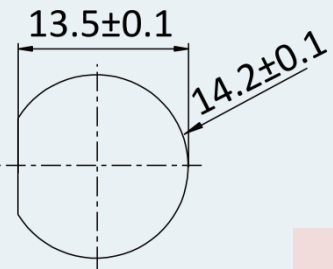 <p>up to 33 pins</p>  <p>Mini Size</p>	 <p>up to 8 pins</p>  <p>Standard Size</p>
 <p>up to 12 pins</p>  <p>Middle Size</p>	 <p>up to 100 pins</p>  <p>Large Size</p>

Amphenol LTW

X-Lok Push Lock Series

Robust Mechanical Design

Applications

- LED
- Industrial automation
- Heavy equipment
- Railway mass transit
- Renewable energies
- Hybrid electric vehicles
- Medical
- Lifts and materials handling
- Broadband wireless access
- Transportation
- Remote video response center
- Marine Electronics
- Autonomous Vehicles
- Automotive diagnostics
- Automated meter reading
- Test and measurement equipment
- Rugged IT



Catalogue

Amphenol LTW

X-Lok Push Lock Series | Mini Size

Alternative Solution to M12



Features

- Blind mate, easy plug and unplug
- Plastic and metal (shielded/non-shielded)
- Stainless steel available
- Contact density up to 33 contacts
- Power AC/DC, data, signal or hybrid
- Nominal current 0.5A ~ 16A, rated voltage up to 630V
- High data transmission up to 10 Gbps
- Long service life $\geq 1,000$ cycles
- Salt spray (mated): plastic 1,000h, metal 96h
- Support overmolded with LED indicators
- Saving on-site installation time & costs
- Exponentially increase installation outputs
- Ingress protection IP68
- Receptacle (with wires), overmolded, field installable, accessories




X-Lok Push Lock Series | Mini Size

Receptacle Receptacle with Wires	Nominal Current	No of Contacts	Rated Voltage (AC/DC)	Plastic	Metal
<p>Panel Cut Out</p> <p>13.5±0.1</p> <p>14.2±0.1</p> <p>(unit: mm)</p>	0.5A	18 ~ 33	50V	✓	*
	1.5A	10 ~ 17	30A	✓	*
	2A	6, 8	30 ~ 300V	✓	*
	5A	2 ~ 5	30 ~ 300V	✓	✓
	16A	3 ~ 5	30 ~ 630V	✓	✓

Overmolded (with LED Indicators)	Nominal Current	No of Contacts	Rated Voltage (AC/DC)	Plastic	Metal
	0.5A	18 ~ 33	50V	✓	*
	1.5A	10 ~ 17	30A	✓	*
	2A	6, 8	30 ~ 300V	✓	*
	5A	2 ~ 5	30 ~ 300V	✓	✓
	16A	3 ~ 5	30 ~ 630V	✓	✓

* Upon request

X-Lok Push Lock Series | Mini Size

Field Installable	Nominal Current	No of Contacts	Rated Voltage (AC/DC)	Plastic	Metal
 <ul style="list-style-type: none"> • Solder • Screw In • Crimp • Push In 	0.5A	18 ~ 33	50V	✓	*
	1.5A	10 ~ 17	30A	✓	*
	2A	6, 8	30 ~ 300V	✓	*
	5A	2 ~ 5	30 ~ 300V	✓	✓
	16A	3 ~ 5	30 ~ 630V	✓	✓


Accessories

 <p>L Adaptor</p>	 <p>I Adaptor*</p>	 <p>T Adaptor</p>	 <p>Y Adaptor</p>	 <p>Multi-Ports Adaptor</p>
 <p>X-Lok to RJ45 Adaptor*</p>	 <p>T Cable</p>	 <p>Terminator*</p>	 <p>Waterproof Cap</p>	 <p>Contacts & Crimp Tool</p>

* Upon request

Contact Us

| Sales & Marketing
Email: bce@bce.it

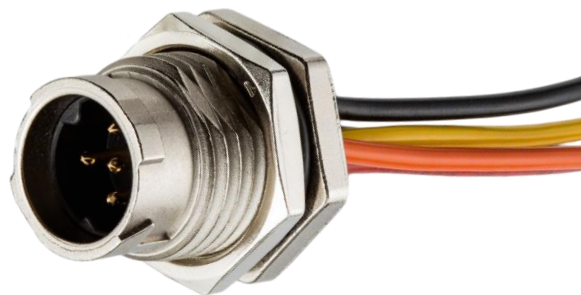

B.C.E. s.r.l.
Via Regina Pacis, 54/c - 41049 SASSUOLO (MO) Italy
Tel. +39 0536 811.616 r.a. - Fax +39 0536 811.500
www.bce.it - E-mail: bce@bce.it



(V031022)

Unrivaled InterConnects for Harsh Environments