



 **WEiPU<sup>®</sup> connector**  
Cable Gland Brand **SEHON<sup>®</sup>**



**B.C.E. s.r.l.**  
Via Regina Pacis, 54/c - 41049 SASSUOLO (MO) Italy  
Tel. +39 0536 811.616 r.a. - Fax +39 0536 811.500  
www.bce.it - E-mail: bce@bce.it



*We provide renowned connecting solutions for use in many industries worldwide.*

Renewable Energy | Energy Storage | Industrial Automation | Test & Measurement | Lighting | Traffic Engineering

## About SEHON

SEHON, a cable gland brand of Weipu Connector, designs and manufactures cable glands and a full range of accessories for industrial environments. SEHON offers a variety of sizes, thread types, and materials to provide fast, safe, and cost-effective solutions in the field of cable management.

SEHON provides high performance on connection protection and safety for electrical installations. With up to IP68 dustproof and waterproof sealing, SEHON's cable glands can be used under various scenarios and withstand harsh environments. The large temperature resistance range and fire resistance can ensure that our products are safe, reliable, and durable at high or low temperatures. Anti-vibration technology prevents seal loosening in operations to ensure the good operation of applications and equipment.

At the same time, supported by comprehensive testing and certification standards and a third-party approved quality management system that meets ISO/TS 22163:2017, and ISO 9001, SEHON cable glands provide high-quality standards that help prolong system life and minimize downtime of devices.

## Certifications

With R&D professionals, up-to-date machinery, a fully equipped in-house testing lab, and a customer-focused quality management system in accordance with ISO/TS 22163:2017, and ISO 9001, SEHON operates in compliance with the highest industry standards with certifications of RoHs, CE, and UL concerning quality, safety, and sustainability.

Available approvals and certifications:



**B.C.E. s.r.l.**  
Via Regina Pacis, 54/c - 41049 SASSUOLO (MO) Italy  
Tel. +39 0536 811.616 r.a. - Fax +39 0536 811.500  
www.bce.it - E-mail: bce@bce.it



## Features



**Dustproof and Waterproof**



**Fire-resistant**



**Temperature-resistant**



**Interference-free**



**UV-resistant**



**Anti-vibration**

## Applications

With the above-mentioned features, SEHON's cable glands well fit various industrial applications which may operate under hostile environments such as extreme temperatures, humidity, vibration, atmospheric pollution, and UV radiation.


SEHON is active in the fields of application:

- Renewable Energy
- Energy Storage
- E-mobility
- Lighting
- Robotics and Automation
- Test & Measurement
- Agriculture
- Security
- Traffic Engineering
- Railway Technology
- Medical Technology
- Mechanical Engineering
- Heavy Equipment
- Consumer





Plastic Cable Glands

HSK Plastic cable gland - Metric thread		Material options	Key Points
Metric thread		<ul style="list-style-type: none"><li>• PA</li></ul>	<ul style="list-style-type: none"><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: M12-M63</li><li>• Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>• Fire resistance: UL94-V2</li><li>• Color options: Black/ Gray</li></ul>
Metric thread Lengthen Type		<ul style="list-style-type: none"><li>• PA</li></ul>	<ul style="list-style-type: none"><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: M12-M63</li><li>• Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>• Fire resistance: UL94-V2</li><li>• Color options: Black/ Gray</li></ul>
Metric thread Multiple-entry Type		<ul style="list-style-type: none"><li>• PA</li></ul>	<ul style="list-style-type: none"><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: M16-M63</li><li>• Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>• Fire resistance: UL94-V2</li><li>• Color options: Black/ Gray</li></ul>
Metric thread Flat-entry Type		<ul style="list-style-type: none"><li>• PA</li></ul>	<ul style="list-style-type: none"><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: M20-M63</li><li>• Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>• Fire resistance: UL94-V2</li><li>• Color options: Black/ Gray</li></ul>
Metric thread with Bending protection		<ul style="list-style-type: none"><li>• PA</li></ul>	<ul style="list-style-type: none"><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: M12-M25</li><li>• Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>• Fire resistance: UL94-V2</li><li>• Color options: Black/ Gray</li></ul>
HSK Plastic cable gland - NPT thread		Material options	Key Points
NPT thread		<ul style="list-style-type: none"><li>• PA</li></ul>	<ul style="list-style-type: none"><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: NPT3/8"- NPT2"</li><li>• Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>• Fire resistance: UL94-V2</li><li>• Color options: Black/ Gray</li></ul>

*\*Custom Material/Size/Thread are Available*



B.C.E. s.r.l.  
Via Regina Pacis, 54/c - 41049 SASSUOLO (MO) Italy  
Tel. +39 0536 811.616 r.a. - Fax +39 0536 811.500  
www.bce.it - E-mail: bce@bce.it



HSK Plastic cable gland - PG thread		Material options	Key Points
PG thread		<ul style="list-style-type: none"><li>• PA</li></ul>	<ul style="list-style-type: none"><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: PG7-PG48</li><li>• Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>• Fire resistance: UL94-V2</li><li>• Color options: Black/ Gray</li></ul>
PG thread Lengthen Type		<ul style="list-style-type: none"><li>• PA</li></ul>	<ul style="list-style-type: none"><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: PG7-PG48</li><li>• Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>• Fire resistance: UL94-V2</li><li>• Color options: Black/ Gray</li></ul>
PG thread Multiple-entry Type		<ul style="list-style-type: none"><li>• PA</li></ul>	<ul style="list-style-type: none"><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: PG9-PG48</li><li>• Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>• Fire resistance: UL94-V2</li><li>• Color options: Black/ Gray</li></ul>
PG thread Flat-entry Type		<ul style="list-style-type: none"><li>• PA</li></ul>	<ul style="list-style-type: none"><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: PG13.5-PG48</li><li>• Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>• Fire resistance: UL94-V2</li><li>• Color options: Black/ Gray</li></ul>
PG thread with Bending protection		<ul style="list-style-type: none"><li>• PA</li></ul>	<ul style="list-style-type: none"><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: PG7-PG21</li><li>• Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>• Fire resistance: UL94-V2</li><li>• Color options: Black/ Gray</li></ul>
HSK Plastic cable gland - G type thread		Material options	Key Points
G Type thread		<ul style="list-style-type: none"><li>• PA</li></ul>	<ul style="list-style-type: none"><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: G1/4"- G2"</li><li>• Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>• Fire resistance: UL94-V2</li><li>• Color options: Black/ Gray</li></ul>

Metric thread

PG thread

NPT thread

G type thread


Plastic Accessories




B.C.E. s.r.l.  
Via Regina Pacis, 54/c - 41049 SASSUOLO (MO) Italy  
Tel. +39 0536 811.616 r.a. - Fax +39 0536 811.500  
www.bce.it - E-mail: bce@bce.it



Metric thread		Material options	Key Points
Metric thread- DPK Blind Plug		<ul style="list-style-type: none"><li>PA</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>IP56/ IP68 with O-ring</li><li>Size: M12-M63</li><li>Temperature range -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Color options: Black/ Gray</li></ul>
Metric thread- REK Reducer		<ul style="list-style-type: none"><li>PA</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>IP56/ IP68 with O-ring</li><li>Size: M16-M63</li><li>Temperature range -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Color options: Black/ Gray</li></ul>
Metric thread- EWK Enlarger		<ul style="list-style-type: none"><li>PA</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>IP56/ IP68 with O-ring</li><li>Size: M12-M50</li><li>Temperature range -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Color options: Black/ Gray</li></ul>
Metric thread- GMK LockNut		<ul style="list-style-type: none"><li>PA</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Size: M12-M63</li><li>Temperature range -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Color options: Black/ Gray</li></ul>

G type thread		Material options	Key Points
G type thread- GMK LockNut		<ul style="list-style-type: none"><li>PA</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Size: G1/4"- G2"</li><li>Temperature range -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Color options: Black/ Gray</li></ul>

PG thread		Material options	Key Points
PG thread- DPK Blind Plug		<ul style="list-style-type: none"><li>PA</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>IP56/ IP68 with O-ring</li><li>Size: PG7-PG48</li><li>Temperature range -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Color options: Black/ Gray</li></ul>
PG thread- REK Reducer		<ul style="list-style-type: none"><li>PA</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>IP56/ IP68 with O-ring</li><li>Size: PG9-PG36</li><li>Temperature range -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Color options: Black/ Gray</li></ul>
PG thread- EWK Enlarger		<ul style="list-style-type: none"><li>PA</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>IP56/ IP68 with O-ring</li><li>Size: PG7-PG42</li><li>Temperature range -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Color options: Black/ Gray</li></ul>
PG thread- GMK LockNut		<ul style="list-style-type: none"><li>PA</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Size: PG7-PG48</li><li>Temperature range -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Color options: Black/ Gray</li></ul>

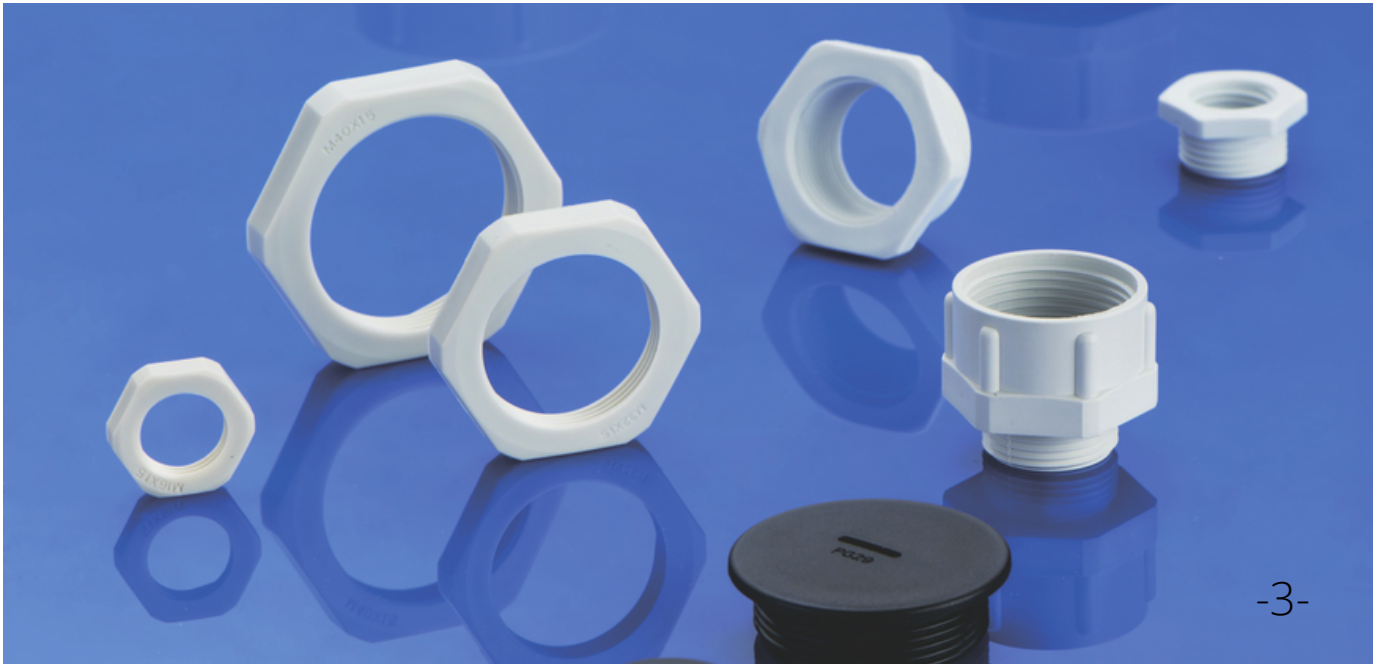













*\*Custom Material/Size/Thread are Available*

Metric thread  
PG thread  
G type thread



Metal Cable Glands

HSM Metal cable gland - Metric thread	Material options	Key Points
<div>Metric thread</div> <div></div>	<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Size: M12-M64</li></ul>
<div>Metric thread Lengthen Type</div> <div></div>	<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Size: M12-M64</li></ul>
<div>Metric thread Multiple-entry Type</div> <div></div>	<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Size: M16-M63</li></ul>
<div>Metric thread Flat-entry Type</div> <div></div>	<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Size: M20-M63</li></ul>
<div>Metric thread EMC Metal type</div> <div></div>	<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Size: M12-M63</li></ul>
HSM Metal cable gland - NPT thread	Material options	Key Points
<div>NPT thread</div> <div></div>	<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Size: NPT1/4"- NPT2"</li></ul>

HSM Metal cable gland - PG thread	Material options	Key Points
<div>PG thread</div> <div></div>	<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Size: PG7-PG48</li></ul>
<div>PG thread Lengthen Type</div> <div></div>	<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Size: PG7-PG48</li></ul>
<div>PG thread Multiple-entry Type</div> <div></div>	<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Size: PG9-PG48</li></ul>
<div>PG thread Flat-entry Type</div> <div></div>	<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Size: PG13.5-PG48</li></ul>
<div>PG thread EMC Metal type</div> <div></div>	<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Size: PG7-PG48</li></ul>
HSM Metal cable gland - G type thread	Material options	Key Points
<div>G Type thread</div> <div></div>	<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Temperature range Dynamic: -20°C up to +80°C Fixed: -40°C to +100°C</li><li>Fire resistance: UL94-V2</li><li>Size: G1/4"- G2"</li></ul>

\*Custom Material/Size/Thread are Available

Metric thread  
PG thread  
NPT thread  
G type thread

Metal Accessories



B.C.E. s.r.l.  
Via Regina Pacis, 54/c - 41049 SASSUOLO (MO) Italy  
Tel. +39 0536 811.616 r.a. - Fax +39 0536 811.500  
www.bce.it - E-mail: bce@bce.it



Metric thread		Material options	Key Points
Metric thread-DPM Circular Blind Plug		<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Size: M12-M63</li></ul>
Metric thread-DPMH Hexagonal Blind Plug		<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Size: M12-M63</li></ul>
Metric thread - REM Reducer		<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Size: M16-M63</li></ul>
Metric thread-EWM Enlarger		<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Size: M12-M50</li></ul>
Metric thread-GM LockNut		<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Size: M12-M64</li></ul>
Metric thread-GME Toothed LockNut		<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Size: M12-M63</li></ul>

PG thread		Material options	Key Points
PG thread-DPM Circular Blind Plug		<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Size: PG7-PG48</li></ul>
PG thread-DPMH Hexagonal Blind Plug		<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Size: PG7-PG48</li></ul>
PG thread-REM Reducer		<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Size: PG9-PG48</li></ul>
PG thread-EWM Enlarger		<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Up to IP68</li><li>Size: PG7-PG42</li></ul>
PG thread-GM LockNut		<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Size: PG7-PG48</li></ul>
PG thread - GME Toothed LockNut		<ul style="list-style-type: none"><li>Brass with Nickle plating</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Size: PG7-PG48</li></ul>

*\*Custom Material/Size/Thread are Available*

Metric thread  
PG thread



Metal Accessories



**B.C.E. s.r.l.**  
Via Regina Pacis, 54/c - 41049 SASSUOLO (MO) Italy  
Tel. +39 0536 811.616 r.a. - Fax +39 0536 811.500  
www.bce.it - E-mail: bce@bce.it





NPT thread		Material options	Key Points
	<b>NPT thread-DPM Circular Blind Plug</b>		<ul style="list-style-type: none"><li>• Brass with Nickle plating</li><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: N3/8"-N3"</li></ul>
	<b>NPT thread-DPMH Hexagonal Blind Plug</b>		<ul style="list-style-type: none"><li>• Brass with Nickle plating</li><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: N3/8"-N3"</li></ul>
	<b>NPT thread-REM Reducer</b>		<ul style="list-style-type: none"><li>• Brass with Nickle plating</li><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: N1/2"-3"</li></ul>
	<b>NPT thread-EWM Enlarger</b>		<ul style="list-style-type: none"><li>• Brass with Nickle plating</li><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: N3/8"~N1-1/2"</li></ul>
	<b>NPT thread-GM LockNut</b>		<ul style="list-style-type: none"><li>• Brass with Nickle plating</li><li>• CE / RoHs</li><li>• Size: NPT1/4"-NPT3"</li></ul>

G Type thread		Material options	Key Points
	<b>G Type thread-DPM Circular Blind Plug</b>		<ul style="list-style-type: none"><li>• Brass with Nickle plating</li><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: G3/8"-G3"</li></ul>
	<b>G Type thread-DPMH Hexagonal Blind Plug</b>		<ul style="list-style-type: none"><li>• Brass with Nickle plating</li><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: G3/8"-G3"</li></ul>
	<b>G type thread-REM Reducer</b>		<ul style="list-style-type: none"><li>• Brass with Nickle plating</li><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: G1/2"-G2"</li></ul>
	<b>G type thread-EWM Enlarger</b>		<ul style="list-style-type: none"><li>• Brass with Nickle plating</li><li>• CE / RoHs</li><li>• Up to IP68</li><li>• Size: G1/4"~G1-1/2"</li></ul>
	<b>G type thread-GM LockNut</b>		<ul style="list-style-type: none"><li>• Brass with Nickle plating</li><li>• CE / RoHs</li><li>• Size: G3/8"-G3"</li></ul>

*\*Custom Material/Size/Thread are Available*


NPT thread  
G type thread

Nylon Plastic Hose		Material options	Key Points	PE Plastic Hose		Material options	Key Points	PP Plastic Hose		Material options	Key Points																		
Nylon Hose		• PA6	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -40°C to +115°C</li><li>Color options: Black/ Gray/Customized color</li><li>Size (IDXOD): 6.7X10.0~48.0X54.5</li></ul>	PE Hose		• PE	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -50°C to +80°C</li><li>Color options: Black/ Gray/Customized color</li><li>Size (IDXOD): 6.7X10.0~48.0X54.5</li></ul>	PP Hose		• PP	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -40°C to +110°C</li><li>Color options: Black/ Gray/Customized color</li><li>Size (IDXOD): 6.7X10.0~48.0X54.5</li></ul>																		
UL94-V0 Flammability Nylon Hose		• PA6	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -40°C to +115°C</li><li>Color options: Black/ Gray/Customized color</li><li>Fire resistance: UL94-V0</li><li>Size (IDXOD): 6.7X10~48.0X54.5</li></ul>	UL94-V0 Flammability PE Hose		• PE	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -50°C to +80°C</li><li>Color options: Black/ Gray/Customized color</li><li>Fire resistance: UL94-V0</li><li>Size (IDXOD): 6.7X10.0~48.0X54.5</li></ul>	UL94-V0 Flammability PP Hose		• PP	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -40°C to +110°C</li><li>Color options: Black/ Gray/Customized color</li><li>Fire resistance: UL94-V0</li><li>Size (IDXOD): 6.7X10.0~48.0X54.5</li></ul>																		
High Temperature Resistance Nylon Hose		• PA6	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -40°C to +150°C</li><li>Color options: Black/ Gray/Customized color</li><li>Fire resistance: UL94-V2</li><li>Size (IDXOD): 6.7X10.0~48.0X54.5</li></ul>	Divisible PE Hose		• PE	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -50°C to +80°C</li><li>Color options: Black/ Gray/Customized color</li><li>Size (IDXOD): 6.7X10.0~48.0X54.5</li></ul>	Divisible PP Hose		• PP	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -40°C to +110°C</li><li>Color options: Black/ Gray/Customized color</li><li>Size (IDXOD): 6.7X10.0~48.0X54.5</li></ul>																		
Divisible Nylon Hose		• PA6	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -40°C to +115°C</li><li>Color options: Black/ Gray/Customized color</li><li>Size (IDXOD): 6.7X10.0~48.0X54.5</li></ul>	<table><tr><th>Metal Hose</th><th>Material options</th><th>Key Points</th></tr><tr><td rowspan="2">CM Plastic-coated Metal Hose</td><td rowspan="2"></td><td rowspan="2"><ul style="list-style-type: none"><li>Inner layer: Galvanized steel strip with special Insulation technology</li><li>Outer layer: PVC</li></ul></td><td rowspan="2"><ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -25°C to +80°C</li><li>Color options: Black/ Gray</li><li>Size (Metric φ): φ8-φ100</li></ul></td></tr><tr></tr><tr><td rowspan="2">CM Metal Hose</td><td rowspan="2"></td><td rowspan="2"><ul style="list-style-type: none"><li>Galvanized steel strip with GB standard thickness</li></ul></td><td rowspan="2"><ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -25°C to +80°C</li><li>Size (Metric φ): φ8-φ100</li></ul></td></tr><tr></tr><tr><td rowspan="2">CMP - Flat Plastic-coated Metal Hose</td><td rowspan="2"></td><td rowspan="2"><ul style="list-style-type: none"><li>Inner layer: Galvanized steel strip with special Insulation technology</li><li>Outer layer: PVC</li></ul></td><td rowspan="2"><ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -25°C to +80°C</li><li>Color options: Black/ Gray</li><li>Size (Metric φ): φ8-φ100</li></ul></td></tr><tr></tr></table>								Metal Hose	Material options	Key Points	CM Plastic-coated Metal Hose		<ul style="list-style-type: none"><li>Inner layer: Galvanized steel strip with special Insulation technology</li><li>Outer layer: PVC</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -25°C to +80°C</li><li>Color options: Black/ Gray</li><li>Size (Metric φ): φ8-φ100</li></ul>	CM Metal Hose		<ul style="list-style-type: none"><li>Galvanized steel strip with GB standard thickness</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -25°C to +80°C</li><li>Size (Metric φ): φ8-φ100</li></ul>	CMP - Flat Plastic-coated Metal Hose		<ul style="list-style-type: none"><li>Inner layer: Galvanized steel strip with special Insulation technology</li><li>Outer layer: PVC</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -25°C to +80°C</li><li>Color options: Black/ Gray</li><li>Size (Metric φ): φ8-φ100</li></ul>			
				Metal Hose	Material options	Key Points																							
CM Plastic-coated Metal Hose		<ul style="list-style-type: none"><li>Inner layer: Galvanized steel strip with special Insulation technology</li><li>Outer layer: PVC</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -25°C to +80°C</li><li>Color options: Black/ Gray</li><li>Size (Metric φ): φ8-φ100</li></ul>																										
CM Metal Hose		<ul style="list-style-type: none"><li>Galvanized steel strip with GB standard thickness</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -25°C to +80°C</li><li>Size (Metric φ): φ8-φ100</li></ul>																										
CMP - Flat Plastic-coated Metal Hose		<ul style="list-style-type: none"><li>Inner layer: Galvanized steel strip with special Insulation technology</li><li>Outer layer: PVC</li></ul>	<ul style="list-style-type: none"><li>CE / RoHs</li><li>Temperature range: -25°C to +80°C</li><li>Color options: Black/ Gray</li><li>Size (Metric φ): φ8-φ100</li></ul>																										





*"We provide renowned connecting solutions  
for use in many industries worldwide."*

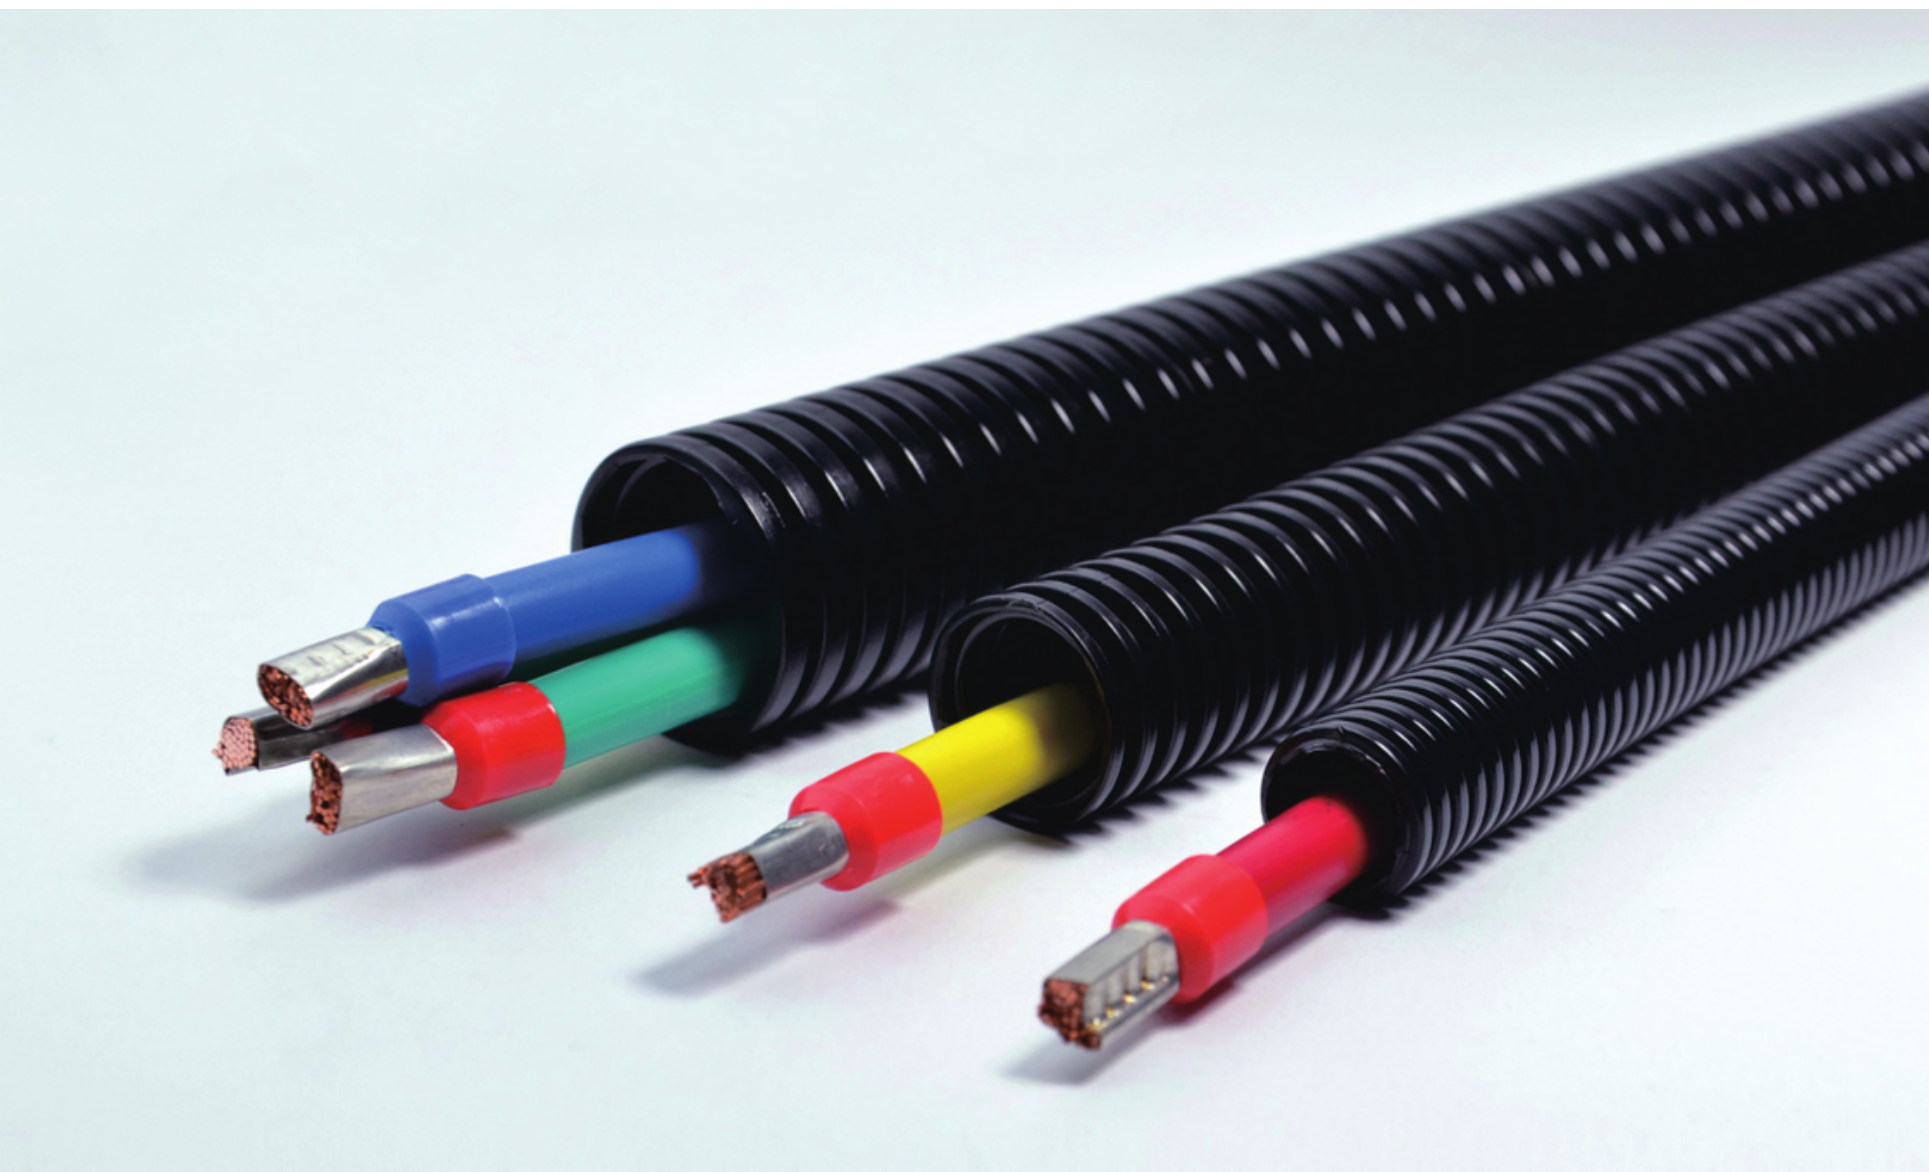

**SEHON®**

A Cable Gland Brand of  **WEiPU® Connector**

**B.C.E.**  
**ELECTRONICS**  
Importation & Distribution  
Electronic Components

**B.C.E. s.r.l.**  
Via Regina Pacis, 54/c - 41049 SASSUOLO (MO) Italy  
Tel. +39 0536 811.616 r.a. - Fax +39 0536 811.500  
www.bce.it - E-mail: bce@bce.it

