












30GHz Elastomer socket for BGA289

High performance and low inductance gold plated embedded wire in elastomer as interconnect material between device and PCB operates 30GHz at -1dB insertion loss, 0.15nH self-inductance, 0.01pF capacitance with 2A current capacity. Simple swivel lid socket structure enables industry's smallest footprint.

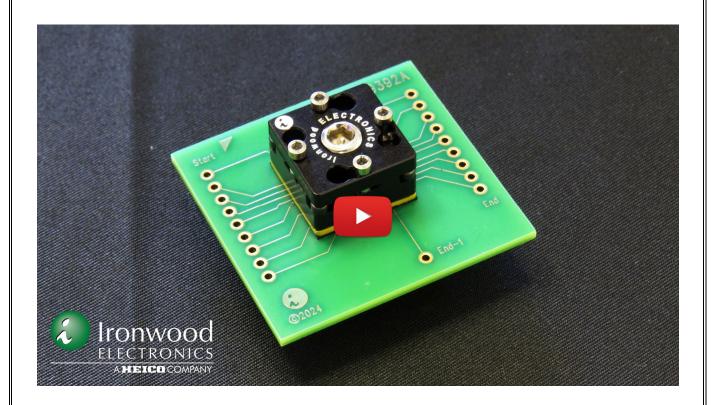

(April, 2024)

| B.C.E. S.r.l Via Regina Pacis, 54/c - I 41049 Sassuolo (MO), Italy | | | |
|--|------------------------|--------------------|-----------------|
| Tel: (+39) 0536 811616 | Fax: (+39) 0536 811500 | E-mail: bce@bce.it | Web: www.bce.it |