

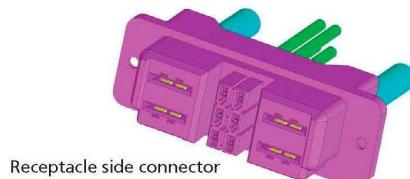


FG SERIES

High Current Battery Connector

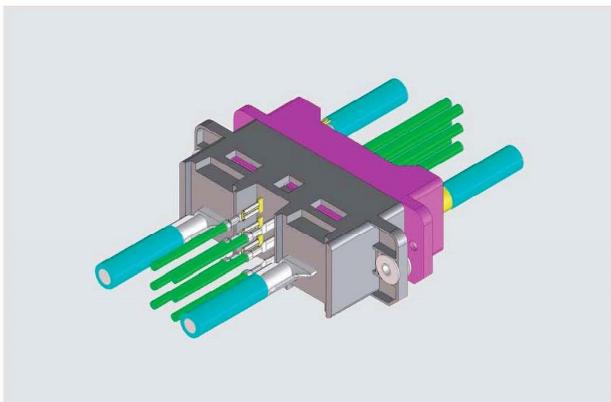

Receptacle side connector

Plug side connector

Target Specifications

Number of contacts	Power contact: 2 pins Signal contact: 6 pins
Rated current	Power contact: 40 to 50 A Signal contact: 2 to 3 A
Applicable wire size: (AWG)	Power contact: #6 to 8 Signal contact: #16 to 20

Application



Power Receiving and Distributing Equipment



Renewable energy



Inverter



Relay vehicle

Application:

- **Power Receiving and Distributing Equipment**
- **Renewable energy**
- **Inverter**
- **Relay vehicle**