

BATTERY TECHNOLOGY



- › Batteries
- › Customized battery packs
- › Manufacturing and production
in Germany and Asia
- › Implementation of all relevant certifications

COMPLETE SOLUTIONS FOR YOUR BATTERY SYSTEM



Jauch has been producing battery power supplies for mobile applications since 1976. At the company's headquarters in Villingen-Schwenningen, Germany experienced battery specialists design and develop configurations for the most diverse applications.






Jauch can offer complete battery solutions for your system according to your technical requirements – from standard batteries using single cells to multi-cell, customized packs with intelligent microprocessor control for the most sophisticated applications. We can take your unique design requests into consideration and include all relevant safety features.

If you are looking for customized battery packs, you should contact us. Our specialists, with their development and production know-how based on decades of experience, will be able to provide you with optimum solutions to allow your product to reach you punctually, safely and in accordance with the latest legislations.




We develop your individual battery solution: from the choice of the cell with the suitable active material and the safety electronics, to the assembly of the battery pack with optional housing. To ensure the battery operates safely in your application, we support this development with our modern test equipment.

In doing so, we meet the highest quality and safety standards. Based on our international project experience in a wide variety of industries, we leverage considerable expertise in terms of which tests and certification procedures must be complied with for the transport and distribution of your battery-powered products.

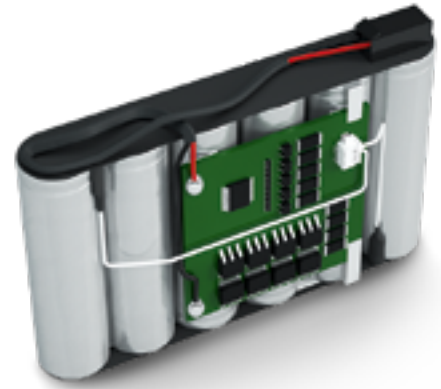

CUSTOMIZED BATTERY PACK DESIGN

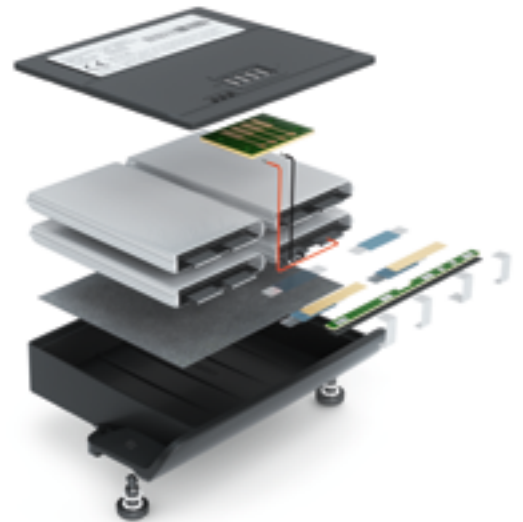

Jauch develops and manufactures the complete battery pack, including customized housing.





YOUR SOURCE FOR LITHIUM POLYMER BATTERIES

As a leading manufacturer of battery solutions, Jauch provides lithium polymer products with particularly high quality and performance for customers around the world.



The space for the installation of the power supply is often limited and is already clear long before you initially contact the battery assembler. Our wide range of lithium polymer batteries allows you to select the battery that best suits your application, even at a later stage in the project.

- › Available ex warehouse
- › Cell selection
- › Sample production in Villingen-Schwenningen, Germany in the shortest time
- › Customized battery protection circuits
- › Perfect quality, performance and safety
- › Experience with battery chemistry
- › Worldwide technical support



Lithium polymer batteries offer several advantages: Lithium polymer cells have higher energy density relative to their total weight than do lithium ion cells. Lithium polymer cells use aluminum-laminated films as a housing, resulting in a lighter and thinner battery. Lithium polymer batteries are highly flexible in cell size and shape. Many smart phones and GPS devices use

lithium polymer batteries. We manufacture customized battery packs for all branches of industry. Leveraging our knowledge and our wealth of experience means we can offer many different solutions in the field of lithium polymer batteries in a short time.

We are happy to assist you from the outset in selecting the optimum battery solution. You can help us by letting us know important advance information regarding your request:

PROJECT REQUIREMENTS

- › Application
- › Voltage (V)
- › Capacity (mAh)
- › Discharge current (mA)
- › Dimensions LxWxH (mm)
- › Quantity

GET THE RELEVANT CERTIFICATIONS EVEN FASTER BY OUR OWN TEST AND CERTIFICATION CENTRE

Anyone who deals with approval issues, perhaps even worldwide, knows that the challenges are becoming ever more extensive and complex.

We have expanded our existing test laboratory to include a new test and certification centre so that we can act faster and provide the best possible support for our customers. We can now test cells and batteries in-house and issue test certificates either ourselves or in collaboration with accredited test laboratories, such as the CB report in accordance with IEC62133-2:2017.



Our knowledge of regulatory requirements enables us to ensure that our batteries meet the necessary requirements and that the tests are carried out quickly and completed successfully in accordance with our customers' requirements.



Cordless, portable and mobile devices are increasingly in demand by the market. The performance of modern batteries makes this possible and creates unimagined freedom in the design and application of battery-powered devices. In addition to performance, the safety of battery-powered devices and, above all, the battery, is crucial to the success of these products. The regulatory authorities are aware of the

potential dangers and have created standards to test for and rule out any potential hazards. The transport test according to UN 38.3, for which the United Nations issues its recommendations, is the basis to which all relevant countries worldwide adhere for transportation. We carry out all individual tests in accordance with UN 38.3 ourselves and issue the corresponding test certificates.

THOROUGHLY TESTED – ALSO ACCORDING TO YOUR CRITERIA

At your request, we demand that our batteries comply strictly with the regulations of the IEC62133 or UN38.3 certification standards, or we can work with even stricter standards that you specify: Our laboratory tests and documents for you exactly what our batteries can withstand.



Thermal shock / abuse test



Vibration test



What we test for certification according to IEC62133



- › Continuous charge at constant voltage
- › Case stress at high ambient temperature
- › External short circuit
- › Free fall
- › Thermal abuse
- › Crush
- › Overcharging of battery
- › Vibration
- › Mechanical shock



Crush test



Free fall test



Mechanical Shock test



External short circuit test



Overcharging test

What we test for certification according to UN38.3



- › Altitude test
- › Thermal cycling
- › Vibration
- › Shock
- › External short circuit
- › Impact/ Crush
- › Overcharge
- › Forced Discharge



Precise cell measurement, cell selection, and meticulous processing carried out on site ensure the highest quality, short production pathways, and maximum reliability for demanding applications. Through automated resistance welding processes and clearly defined manufacturing steps, we achieve reproducible and fully traceable series production quality. For medium to high production volumes, we also collaborate with long standing manufacturing partners in Asia who undergo regular audits to ensure consistent quality.

Depending on the requirements, we integrate protection circuits (PCM) and intelligent battery management systems tailored to the cell chemistry and the specific application and qualified accordingly.

YOUR BATTERY PACK – ENGINEERED, MANUFACTURED, AND QUALIFIED BY JAUCH

Jauch is certified according to DIN EN ISO 9001:2015. At our Villingen-Schwenningen site, we manufacture customer specific Lithium Battery Packs in modern, ESD protected facilities – from prototypes and single units to full series production. The entire manufacturing process takes place in Germany, delivering genuine “Made in Germany” quality.












- › ESD protected production environment
- › Cell measurement and selection
- › Automated resistance welding
- › Documented process steps
- › Full traceability
- › Prototype and series production in Germany
- › Scalable high volume production with audited partners in Asia

NON RECHARGEABLE BATTERIES






CYLINDRICAL LITHIUM BATTERIES

MODEL	VOLTAGE (V)	CAPACITY (mAh)	MAX. CONTINUOUS CURRENT (mA)	DIAMETER (mm)	LENGTH (mm)
STANDRAD TYPE					
 CR2	3.00	850	800	27.00	15.20
 CR123A	3.00	1600	1500	17.00	34.50
 CR14250 1/2AA	3.00	850	800	14.50	25.00
 CR17335 2/3A	3.00	1600	1000	17.00	33.50
 CR2/3AL	3.00	1600	1000	17.00	34.50
 CR14505 AA	3.00	1600	1000	14.30	49.45
 CR17450 AG	3.00	2500	1000	17.00	45.00
 CR17505 A	3.00	2800	1000	17.00	51.50
EXTENDED LIFESPAN					
 CR123AH	3.00	1800	1000	17.00	34.50
 CR17335AH 2/3A	3.00	1600	700	17.00	33.50
 CR17450AH AG	3.00	2600	1000	17.00	45.00
ENERGY TYPE					
 CR2E	3.00	1000	1000	15.60	26.50
 CR123AE	3.00	1500	1000	17.00	34.50
 CR17450E AG	3.00	2400	1000	17.00	45.00

NON RECHARGEABLE BATTERIES



CYLINDRICAL LITHIUM BATTERIES






	MODEL	VOLTAGE (V)	CAPACITY (mAh)	WIDTH (mm)	Hight (mm)	LENGTH (mm)
BATTERY						
	CR P2	6.00	1600	19.50	36.00	35.00
	2CR5	6.00	1600	17.00	45.00	34.00
	CR 9V	9.00	1200	17.00	48.50	26.50



NON RECHARGEABLE BATTERIES














TABBED LITHIUM COIN CELLS

	MODEL	VOLTAGE (V)	CAPACITY (mAh)	DIAMETER (mm)	HEIGHT (mm)	TAB VARIATION
	CR1025 V2	3.00	30	10.00	2.50	2 pins vertical / through hole mounting
	CR1220 V2	3.00	40	12.50	2.00	2 pins vertical / through hole mounting
	CR1225 H2	3.00	48	12.50	2.50	2 pins horizontal/ through hole mounting
	CR1632 H2	3.00	135	16.00	3.20	2 pins horizontal/ through hole mounting
	CR1632 H2B	3.00	135	16.00	3.20	2 pins horizontal/ through hole mounting
	CR2032 H2	3.00	240	20.00	3.20	2 pins horizontal/ through hole mounting
	CR2032 H2B	3.00	240	20.00	3.20	2 pins horizontal/ through hole mounting
	CR2032 H3	3.00	240	20.00	3.20	3 pins horizontal/ through hole mounting
	CR2032 H3B	3.00	240	20.00	3.20	3 pins horizontal/ through hole mounting
	CR2032 V2	3.00	240	20.00	3.20	2 pins vertical / through hole mounting
	CR2032 V3	3.00	240	20.00	3.20	3 pins vertical / through hole mounting
	CR2450 H3	3.00	610	24.50	5.00	3 pins horizontal/ through hole mounting
	CR2450 H3B	3.00	610	24.50	5.00	3 pins horizontal/ through hole mounting
	CR2450 V3	3.00	610	24.50	5.00	3 pins vertical / through hole mounting
	CR2477 H2B	3.00	1.000	24.50	7.70	2 pins horizontal/ through hole mounting
	CR2477 V3	3.00	1.000	24.50	7.70	3 pins vertical / through hole mounting




NON RECHARGEABLE BATTERIES



TABBED LITHIUM COIN CELLS

	MODEL	VOLTAGE (V)	CAPACITY (mAh)	DIAMETER (mm)	HEIGHT (mm)	TAB VARIATION
	CR1216SM	3.00	30	12.00	1.60	Surface Mounting
	CR1220SM	3.00	40	12.50	2.00	Surface Mounting
	CR1225SM	3.00	48	12.50	2.50	Surface Mounting
	CR1620SM	3.00	75	16.00	2.00	Surface Mounting
	CR1632SM	3.00	135	16.00	3.20	Surface Mounting
	CR2016SM	3.00	85	20.00	1.60	Surface Mounting
	CR2025SM	3.00	165	20.00	2.50	Surface Mounting
	CR2032SM	3.00	240	20.00	3.20	Surface Mounting
	CR2430SM	3.00	320	24.50	3.00	Surface Mounting
	CR2450SM	3.00	610	24.50	5.00	Surface Mounting
	CR2477SM	3.00	1.000	24.50	7.70	Surface Mounting


















MATRIX OF TABBED LITHIUM COIN CELLS

Mounting		Through Hole				Through Hole				Surface Mounting	
Assembly Position		Horizontal assembly				Vertical assembly				SMD assembly	
Description		H				V				SM	
											
Tab specification	Tab variation	H2	H2B	H3	H3B	V2	V2B	V3	V3B	SM	SM2
	Description	Two Pins	Two Pins wide tab distance	Three Pins	Three Pins wide tab distance	Two Pins	Two Pins wide tab distance	Three Pins	Three Pins wide tab distance	Tabs on each side	Both tabs on same side

NON RECHARGEABLE BATTERIES



LITHIUM COIN CELLS

	MODEL	VOLTAGE (V)	CAPACITY (mAh)	DIAMETER (mm)	HEIGHT (mm)	WEIGHT (g)
	CR1025J	3.00	30	10.00	2.50	0.70
	CR1216J	3.00	25	12.50	1.60	0.70
	CR1220J	3.00	38	12.50	2.00	0.80
	CR1225J	3.00	50	12.50	2.50	0.90
	CR1616J	3.00	50	16.50	1.60	1.20
	CR1620J	3.00	70	16.00	2.00	1.30
	CR1632J	3.00	140	16.00	3.20	2.00
	CR2016J	3.00	80	20.00	1.60	2.00
	CR2025J	3.00	150	20.00	2.50	2.60
	CR2032J	3.00	245	20.00	3.20	3.20
	CR2320J	3.00	130	23.00	2.00	3.00
	CR2325J	3.00	190	23.00	2.50	3.30
	CR2330J	3.00	260	23.00	3.00	4.00
	CR2335J	3.00	300	23.00	3.50	4.30
	CR2354J	3.00	560	23.00	5.40	6.90
	CR2430J	3.00	270	24.50	3.00	4.50
	CR2450J	3.00	620	24.50	5.00	6.90
	CR2477J	3.00	1.000	24.50	7.70	10.50
	CR3032J	3.00	500	30.00	3.20	6.80

* The letter "J" is part of the designation only and has no other technical meaning


NON RECHARGEABLE BATTERIES



HIGH TEMPERATURE LITHIUM COIN CELLS

	MODEL	VOLTAGE (V)	CAPACITY (mAh)	DIAMETER (mm)	HEIGHT (mm)	TEMPERATURE RANGE
	CR1632JHT	3.00	120	16.00	3.20	-40°C to +125°C
	CR2032JHT	3.00	200	20.00	3.20	-40°C to +125°C
	CR2050JHT	3.00	300	20.00	5.00	-40°C to +125°C
	CR2450JHT	3.00	550	24.00	5.00	-40°C to +125°C

* The HT cells are also available with different tab configurations

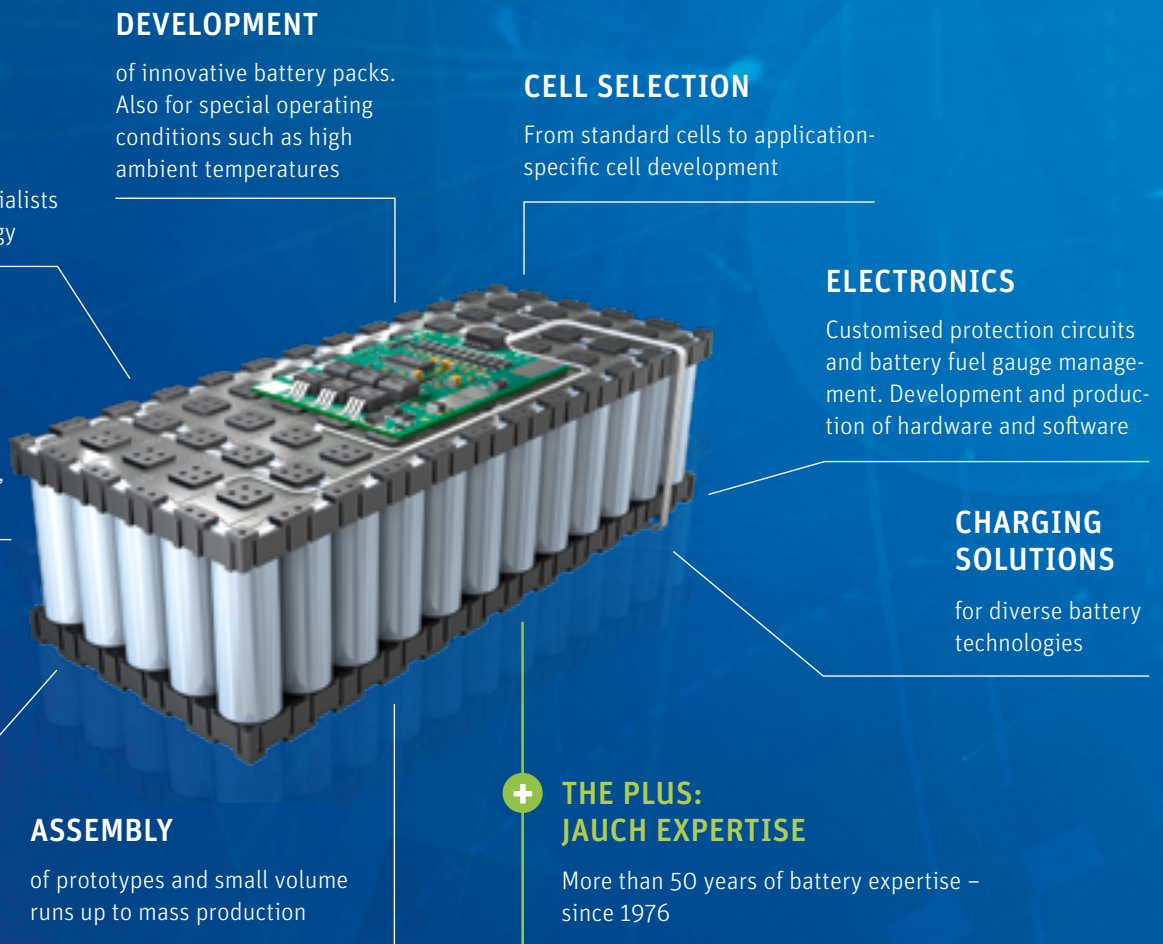

CONSULTING

by experienced specialists for battery technology

DEVELOPMENT

of innovative battery packs. Also for special operating conditions such as high ambient temperatures

CELL SELECTION

From standard cells to application-specific cell development

ELECTRONICS

Customised protection circuits and battery fuel gauge management. Development and production of hardware and software

CERTIFICATION

Fulfillment of all legal and safety-relevant regulations, UN 38.3, UL 2054, UL 1642, IEC 62133, PSE, BIS, CE

CHARGING SOLUTIONS

for diverse battery technologies

HOUSING DESIGN

Soft-pack, plastic housings, metal housings ...

ASSEMBLY

of prototypes and small volume runs up to mass production

+ THE PLUS: JAUCH EXPERTISE

More than 50 years of battery expertise – since 1976



NON RECHARGEABLE BATTERIES




LITHIUM THIONYL CHLORIDE BATTERIES


	MODEL	CELL SIZE REFERENCE	VOLTAGE (V)	CAPACITY (mAh)	TEMPERATURE RANGE	TAB VARIATION
	ER2450J-T	Wafer	3.60	500	-55°C to +85°C	PC Pins
	ER32L65J	1/10D	3.60	1000	-55°C to +85°C	PC Pins
	ER14250J-S	1/2AA	3.60	1200	-55°C to +85°C	Single Cell
	ER14250J-T	1/2AA	3.60	1200	-55°C to +85°C	Solder Tab
	ER14250J-2PT	1/2AA	3.60	1200	-55°C to +85°C	2 Pins
	ER14250J-P	1/2AA	3.60	1200	-55°C to +85°C	Axial Leaded
	ER14335J-S	2/3AA	3.60	1650	-55°C to +85°C	Singel Cell
	ER14335J-T	2/3AA	3.60	1650	-55°C to +85°C	Solder Tab
	ER14335J-P	2/3AA	3.60	1650	-55°C to +85°C	Axial Leaded
	ER14505J-S	AA	3.60	2600	-55°C to +85°C	Singel Cell
	ER14505J-T	AA	3.60	2600	-55°C to +85°C	Solder Tab
	ER14505J-P	AA	3.60	2600	-55°C to +85°C	Axial Leaded
	ER14505J-2PT	AA	3.60	2600	-55°C to +85°C	2 Pins
	ER14505J-3PF	AA	3.60	2600	-55°C to +85°C	3 Pins
	ER14505J-3FP	AA	3.60	2600	-55°C to +85°C	3 Pins
	ER17505J-S	A	3.60	3600	-55°C to +85°C	Singel Cell
	ER17505J-T	A	3.60	3600	-55°C to +85°C	Solder Tab
	ER18505J-S	A	3.60	4000	-55°C to +85°C	Singel Cell
	ER18505J-T	A	3.60	4000	-55°C to +85°C	Solder Tab
	ER26500J-S	C	3.60	8500	-55°C to +85°C	Singel Cell
	ER26500J-T	C	3.60	8500	-55°C to +85°C	Solder Tab
	ER34615J-S	D	3.60	19000	-55°C to +85°C	Singel Cell
	ER34615J-T	D	3.60	19000	-55°C to +85°C	Solder Tab

ER CELL TAB CONFIGURATIONS


/S




/P

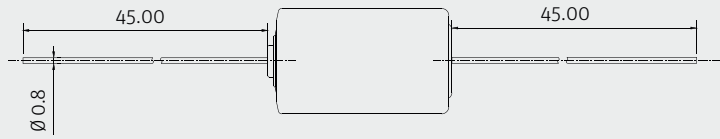


/TA

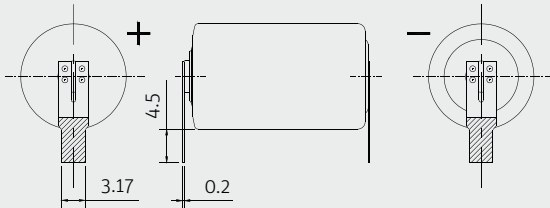


/T

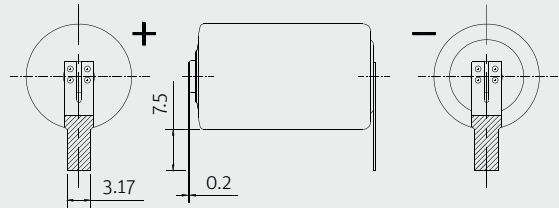


/2PT

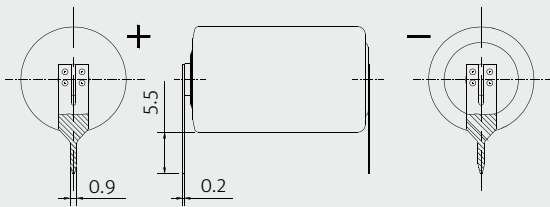


/3PT

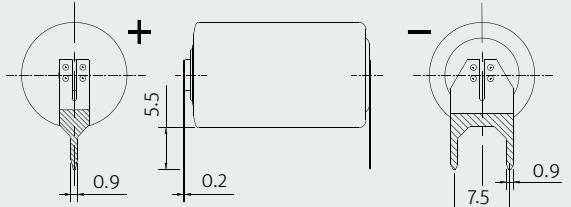


/3TP

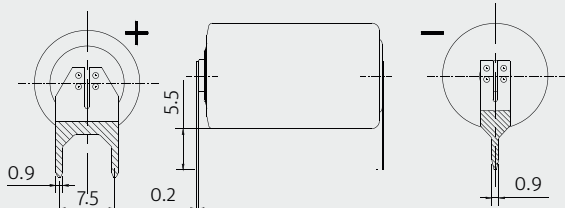


/3PF

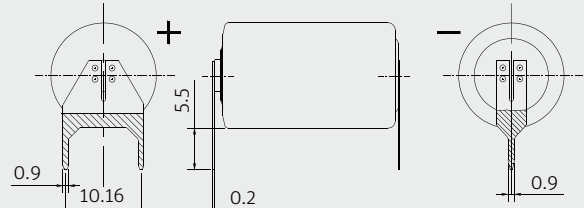

/3FP

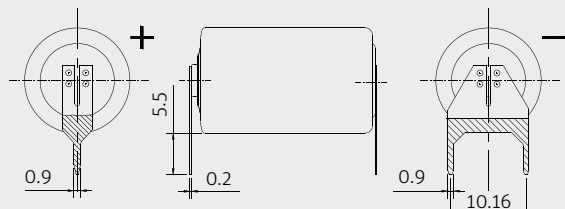

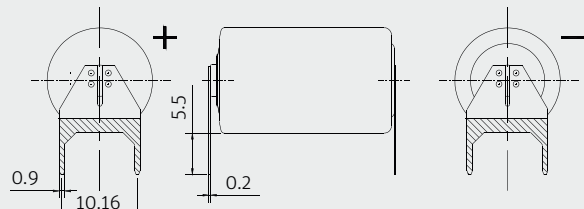


/4PF



RECHARGEABLE BATTERIES



LITHIUM POLYMER BATTERIES

	MODEL	VOLTAGE (V)	CAPACITY (mAh)	HEIGHT (mm)	WIDTH (mm)	LENGTH (mm)
	LP402025JU	3.7	140	4.00	22.00	27.00
	LP851719JU	3.7	180	8.50	18.00	22.00
	LP502030JH	3.7	250	5.00	21.00	32.00
	LP561836JU	3.7	350	5.60	18.50	38.50
	LP402535JU	3.7	380	4.50	25.50	37.00
	LP333437JU	3.7	410	3.50	34.00	39.00
	LP502243JU	3.7	430	5.20	22.50	45.50
	LP503030JU	3.7	450	5.20	30.00	30.00
	LP802036JU	3.7	480	8.00	20.50	38.00
	LP503040JH	3.7	600	5.00	30.50	42.00
	LP443441JU	3.7	630	4.40	35.00	44.00
	LP102530JU	3.7	680	10.00	26.00	32.00
	LP603443JU	3.7	850	6.00	34.50	45.00
		LP523450JU	3.7	950	5.40	34.80
LP305166JH		3.7	1200	3.00	51.00	68.00
LP503562JU		3.7	1250	5.80	36.00	63.50
LP503759JU		3.7	1300	5.40	38.00	62.00
LP633750JH		3.7	1400	6.50	38.00	52.50
LP103048JU		3.7	1430	9.90	30.50	50.00
LP883550JU		3.7	1600	8.80	36.00	52.00
LP605060JU		3.7	1850	6.00	51.00	63.00
LP103450JH		3.7	1900	10.00	34.50	52.00
LP504783JU		3.7	2050	5.20	47.50	84.50

RECHARGEABLE BATTERIES



LITHIUM POLYMER BATTERIES



MODEL	VOLTAGE (V)	CAPACITY (mAh)	HEIGHT (mm)	WIDTH (mm)	LENGTH (mm)
LP675365JU	3.7	2800	6.90	54.00	68.00
LP685077JU	3.7	3500	6.80	51.00	79.00
LP735977JH	3.7	4800	7.30	59.50	78.50
LP906090JH	3.7	6000	9.00	60.50	93.50

LITHIUM ION BATTERIES










MODEL	VOLTAGE (V)	CAPACITY (mAh)	WIDTH (mm)	HEIGHT (mm)	LENGTH (mm)
LI1450J 1s1p	3.6	850	16.00	16.00	53.00
LI1865J 1s1p	3.6	2600	20.00	20.00	69.00
LI1865J PROTECTED	3.6	3350	19.00	19.00	70.50
LI1865J 1s1p	3.6	3350	20.00	20.00	69.00
LI1865J 1s2p	3.6	6700	38.00	20.00	69.00
LI1865J 2s1p	7.2	3350	38.00	20.00	69.00
LI1865J 2s2p	7.2	6700	38.00	38.00	71.00
LI2170J 1s1p	7.2	5000	22.00	22.00	75.00

RECHARGEABLE BATTERIES







LITHIUM ION CELLS

	MODEL	VOLTAGE (V)	CAPACITY (mAh)	MAX. DISCHARGE CURRENT (A)	DIAMETER (mm)	LENGTH (mm)
	LI INR18650J-25P	3.6	2500	30	18.25	64.95
	LI INR18650J-26E	3.6	2600	7.8	18.25	64.95
	LI INR18650J-29E	3.6	2900	6	18.25	64.95
	LI INR18650J-30P	3.6	3000	30	18.25	64.95
	LI INR18650J-35E	3.6	3500	10	18.25	64.95
	LI INR21700J-40P	3.6	4000	45	21.5	70.75
	LI INR21700J-50E	3.6	5000	15	21.4	70.75

RECHARGEABLE BATTERIES



LITHIUM COIN CELLS

	MODEL	VOLTAGE (V)	CAPACITY (mAh)	HEIGHT (mm)	DIAMETER (mm)
	ML1220	3.0	18	2.0	12.5
	ML2020	3.0	40	2.0	20.0
	ML2032	3.0	65	3.2	20.0
	ML2430	3.0	100	3.0	24.5

RECHARGEABLE BATTERIES



LITHIUM IRON PHOSPHATE BATTERIES

MODEL	VOLTAGE (V)	CAPACITY (Ah)	ENERGY (Wh)	HEIGHT (mm)	WIDTH (mm)	LENGTH (mm)
LFP1207	12.80	7	90	95.0	65.0	151.0
LFP1210	12.80	10	128	95.0	65.0	151.0
LFP1212	12.80	12	154	95.0	98.0	151.0
LFP1216	12.80	16	205	95.0	98.0	151.0
LFP1220	12.80	20	256	167.0	76.5	181.0
LFP1230	12.80	30	384	157.0	130.0	195.0
LFP1250	12.80	50	640	208.0	144.0	229.0
LFP12100	12.80	100	1280	218.0	172.0	330.0
LFP12200	12.80	200	2560	218.0	240.0	522.0

B.C.E. S.r.l.

Via Regina Pacis, 54/c - I 41049 Sassuolo (MO)
Tel.: (+39) 0536 811616 - Fax.: (+39) 0536 811500

e-mail: bce@bce.it - Website: www.bce.it





PROFESSIONAL POWER FROM JAUCH – COMPETENT, FLEXIBLE, ON TIME

If you want to equip your application safely and reliably with a battery system, you have come to the right place. Together with you, Jauch will elaborate the ideal solution with regards to cell selection, designs, electronics, safety and charging technology.

- › Project management
- › Development
- › Prototype construction
- › Series production
- › Certification
- › Logistics and shipping



We take into account special design requests as well as all relevant safety aspects. Jauch provides you with the best of expertise for development and production based on decades of experience to bring your solution onto the market safely, on time and within the law.

DETAILED CERTIFICATION AND TRANSPORT EXPERTISE FOR YOUR APPLICATION

Lithium batteries are subject to many standards and regulations in terms of transport and for product approval.



A certification of the battery is often required for approval of your application. We ensure that the battery reliably meets the industrial and approval requirements. All internationally required certifications can be performed. And of course, our lithium batteries are also tested for shipping according to the internationally accepted UN38.3 standard.



SUSTAINABLY SUCCESSFUL

EcoVadis conducts sustainability ratings worldwide in accordance with international sustainability standards. In January 2026, the Jauch Group received the EcoVadis Silver Medal for its sustainability performance. This globally recognized rating evaluates companies in four key areas: environment, labor and human rights, ethics, and sustainable procurement. This is the second consecutive year that Jauch has received this award. With this recognition, Jauch placing it in the top 15% of all participating companies. This confirms our commitment to a responsible and sustainable future.



Sustainability is important to us and is deeply rooted in our corporate DNA. For us, acting sustainably is more than an obligation – it's an opportunity and a promise for a better future. That's why we combine economic success with a respectful approach to all relevant resources and stakeholders. We are already setting the course for tomorrow – for ourselves, our company, and the environment.

As a globally operating company, we recognise that our actions have a worldwide impact. Therefore, we take responsibility across the entire supply chain and consistently align our business with sustainable principles.

SUSTAINABILITY AT JAUCH

IT'S AN OPPORTUNITY AND A PROMISE FOR A BETTER FUTURE



For us, sustainability means combining economic success with responsibility for people and the planet, contributing to long-lasting, viable systems. Through a comprehensive double materiality analysis, we worked closely with our key stakeholders – including employees, suppliers, customers, and investors – to identify the most important sustainability issues for Jauch.

The result is a set of key focus topics that form the core of our sustainability strategy. These priorities cover the areas of environment, social, and governance, and shape our goals and actions in sustainability management.

CUSTOMIZED TRANSPORT AND LOGISTICS SOLUTIONS

Our staff are specially trained in the shipment of dangerous goods and are IATA-certified.



We know how to get batteries to their destination quickly and safely. Because we stress the highest quality and safety standards even in shipping, ensuring that our products reach you in time.

- › SAP R/3 controlled paternoster warehouse
- › Our “known consignor” status guarantees fast and secure shipping
- › Transport safety through compliance with the internationally accepted UN38.3 standard
- › Support for our customers on adherence to legally mandatory transportation, storage and handling regulations



STAY INFORMED

Jauch provides the impulse for progress in battery technology through a wide variety of media or channels. Follow us and you will always be informed about the latest news on technologies, new regulations, services, seminars and products.



Jauch Quartz Deutschland
Jauch Quartz



Jauch Quartz



Newsletter



Blog



Jauch Quartz GmbH
In der Lache 24
78056 Villingen-Schwenningen
Germany

Jauch Quartz France
121 rue d'Aguesseau
92100 Boulogne-Billancourt
France

Jauch Quartz UK, Ltd.
Unit 4.7, Frimley 4 Business Park
Frimley, Surrey, GU16 7SG
United Kingdom

Jauch Quartz America, Inc.
43-100 Cook St, Ste 200
Palm Desert, CA 92211
USA



B.C.E. s.r.l.
Via Regina Pacis, 54/c - 41049 SASSUOLO (MO) Italy
Tel. +39 0536 811.616 r.a. - Fax +39 0536 811.500
www.bce.it - E-mail: bce@bce.it

