

SX5CTG HCMOS SURFACE MOUNT TEMPERATURE COMPENSATED CRYSTAL CLOCK OSCILLATOR

FEATURES

5.0 x 3.2 x 1.65 mm

- Miniature package
- High precision for -40° to +85°C , ± 0.20 ppm
- ± 0.05 ppm -10° to +70°C
- Applications: Femtocell, Base stations, Stratum 3, ...



Item	Specification																																				
Frequency Range	10.0 MHz to 52.0 MHz																																				
Standard Frequency	10.000 ; 12.800 ; 19.200 ; 20.000 ; 26.000																																				
Output Logic	CMOS																																				
Supply Voltage Vdd (see options)	+3.3 V ±5% +5.0 V ±5%																																				
Supply Current Idd	6.0 mA max.																																				
Frequency Tolerance	±2.0 ppm max. at 25°C ±2°C (one hour after reflow)																																				
Frequency Stability vs Temperature (see options)	<table border="1"> <thead> <tr> <th></th> <th>±0.05 ppm</th> <th>±0.10 ppm</th> <th>±0.20 ppm</th> <th>±0.28 ppm</th> <th>±0.28 ppm</th> </tr> </thead> <tbody> <tr> <td>0° to +50°C</td> <td>o</td> <td>o</td> <td>o</td> <td>o</td> <td>o</td> </tr> <tr> <td>-10° to +60°C</td> <td>o</td> <td>o</td> <td>o</td> <td>o</td> <td>o</td> </tr> <tr> <td>-20° to +70°C</td> <td>◊</td> <td>o</td> <td>o</td> <td>o</td> <td>o</td> </tr> <tr> <td>-40° to +85°C</td> <td>x</td> <td>x</td> <td>◊</td> <td>o</td> <td>o</td> </tr> <tr> <td></td> <td colspan="2">o = available</td> <td colspan="2">◊ = please contact us</td> <td>x = not available</td> </tr> </tbody> </table>		±0.05 ppm	±0.10 ppm	±0.20 ppm	±0.28 ppm	±0.28 ppm	0° to +50°C	o	o	o	o	o	-10° to +60°C	o	o	o	o	o	-20° to +70°C	◊	o	o	o	o	-40° to +85°C	x	x	◊	o	o		o = available		◊ = please contact us		x = not available
	±0.05 ppm	±0.10 ppm	±0.20 ppm	±0.28 ppm	±0.28 ppm																																
0° to +50°C	o	o	o	o	o																																
-10° to +60°C	o	o	o	o	o																																
-20° to +70°C	◊	o	o	o	o																																
-40° to +85°C	x	x	◊	o	o																																
	o = available		◊ = please contact us		x = not available																																
Frequency Stability vs Aging	±1.0 ppm max. per year at 25°C																																				
Frequency Stability vs Voltage Change	±0.2 ppm max., for a ±5% input voltage change																																				
Frequency Stability vs Load Change	±0.2 ppm max., for a ±10% load condition change																																				
Output Level	VOH ≥ 0.9 Vdd VOL ≤ 0.1 Vdd																																				
Output Load	15 pF																																				
Symmetry	45 / 55%																																				
Rise Time / Fall Time Fr / Ff	10 ns max.																																				
Start-up Time	2.0 ms max.																																				
Phase Noise	<table border="1"> <thead> <tr> <th>Offset / dBc / Hz</th> <th>100 Hz</th> <th>1 kHz</th> <th>10 kHz</th> </tr> </thead> <tbody> <tr> <td>(typical)</td> <td></td> <td></td> <td></td> </tr> <tr> <td>12.800 MHz</td> <td>-125 dBc / Hz</td> <td>-145 dBc / Hz</td> <td>-150 dBc / Hz</td> </tr> </tbody> </table>	Offset / dBc / Hz	100 Hz	1 kHz	10 kHz	(typical)				12.800 MHz	-125 dBc / Hz	-145 dBc / Hz	-150 dBc / Hz																								
Offset / dBc / Hz	100 Hz	1 kHz	10 kHz																																		
(typical)																																					
12.800 MHz	-125 dBc / Hz	-145 dBc / Hz	-150 dBc / Hz																																		
Packing Unit	1000 pcs / reel																																				
Soldering Condition	260°C, 10 sec x2 max																																				

Customer specifications on request


OPTIONS & ORDERING INFORMATION

SX5CTG

..... MHz
Supply Voltage *	Operating Temp. *	Temperature Stability *	Tri-state Function	Package type	Frequency in MHz
33 = +3.3V	C = 0° / +50°C	0.05 = ±0.05 ppm	F = No Tri-state	4P = 4-pad version	Please specify the frequency in MHz
50 = +5.0V	D = -10° / +60°C	0.10 = ±0.10 ppm			
	F = -10° / +70°C	0.20 = ±0.20 ppm			
	K = -40° / +85°C	0.28 = ±0.28 ppm			
		0.50 = ±0.50 ppm			

(*) Note : Not all combinations are possible, please consult us.

OUTLINE DIMENSIONS

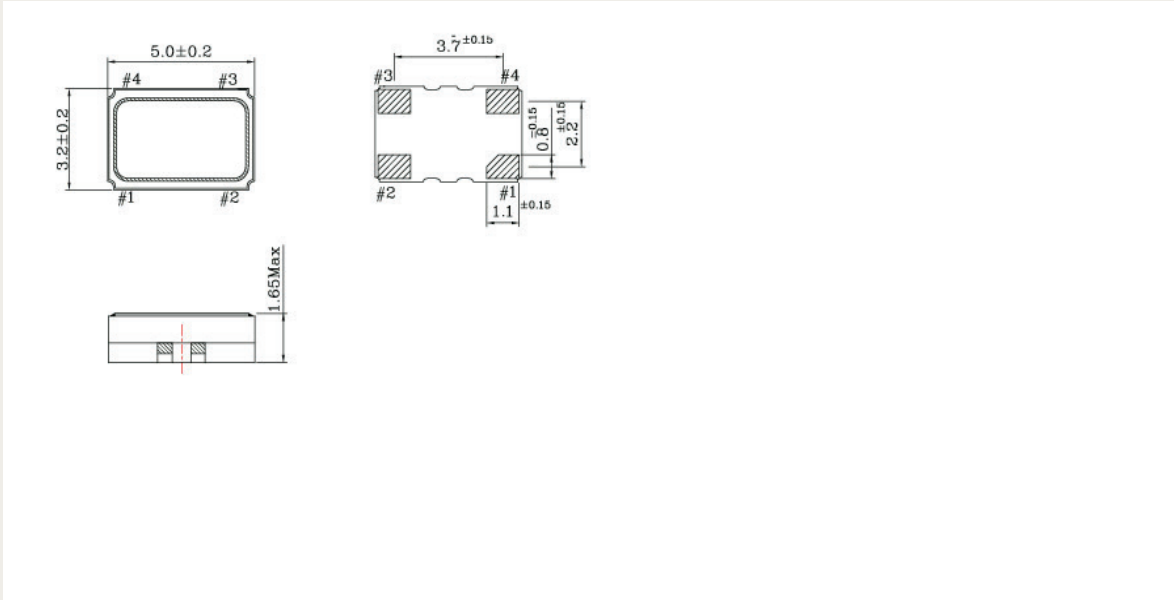

Pin Connections

#1 : NC

#2 : GND

#3 : Output

#4 : Vdd