


RoHS

IP66~67

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/20/2015

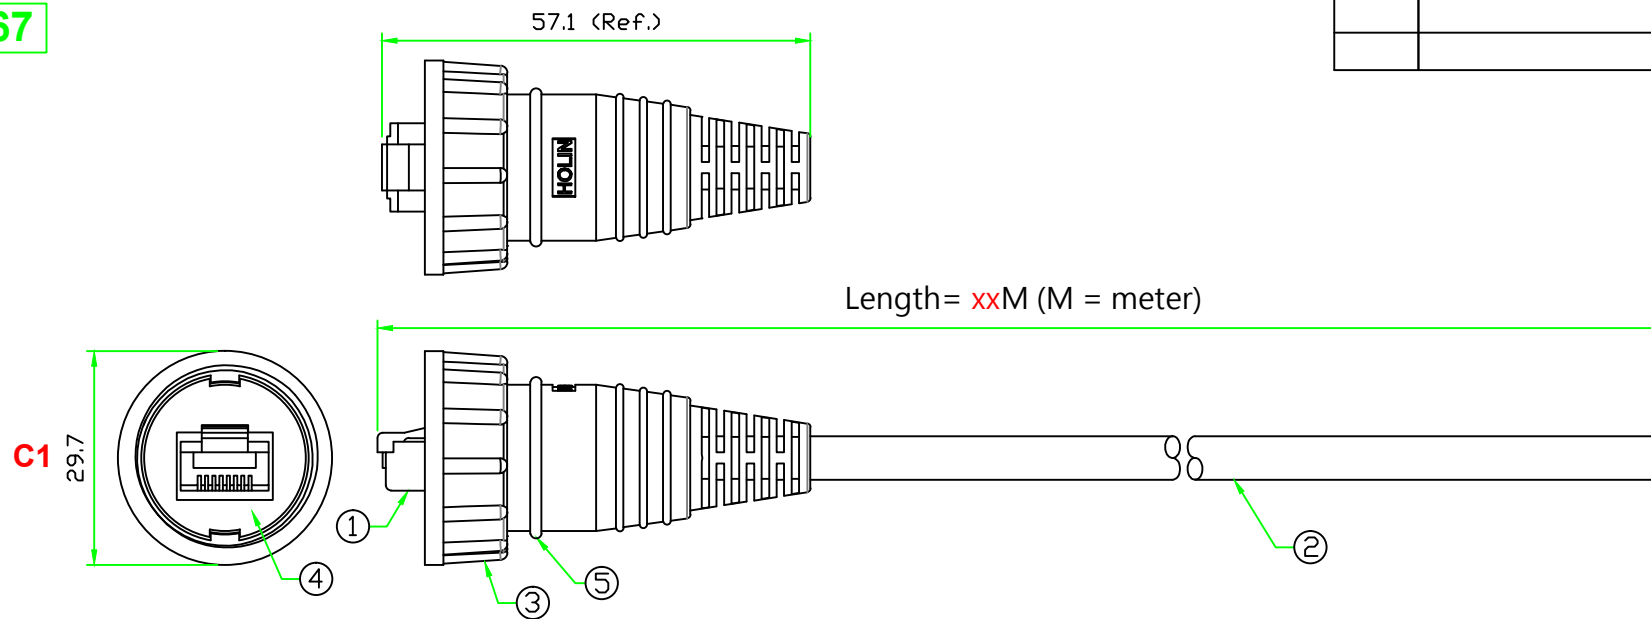

**C1**

Wiring diagram		
C1	Wire Color	
1	Orange/White	橙白
2	Orange	橙
3	Green/White	綠白
4	Blue	藍
5	Blue/White	藍白
6	Green	綠
7	Brown/White	棕白
8	Brown	棕
Shell	Drain Wire	地線

RJ45D-P4SM Pin Assignment Front View (前視圖)

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
5	O-RING	NBR.	BLACK	1	
4	GASKET	EPDM.	BLACK	1	
3	SCREW NUT	NYLON+GF.	BLACK	1	
2	CABLE	CAT5e FTP 24AWG x 4 Pair.	BLACK	1	
1	PLUG	RJ-45 8P8C SHIELDED PLUG.		1	

**HOLIN<sup>®</sup>** HTP ASIA TECHNOLOGY CO., LTD.  
禾凌科技股份有限公司

UNIT: mm  
SCALE: 1:1

TITLE: RJ45 D-size Over-Molded Connector (Screw Type)

P/N: RJ45D-P4SM-xxM

UNLESS OTHERWISE SPECIFIED TOLERANCES:  
x ±0.25 xx ±0.1  
xxx ±0.05 ANGLE ± 1°

REV. A SHEET 1/1

DWG.NO: RJ45D-P4SM-xxM

DR. Stanley  
CH. ERJE  
AP.