


Amphenol LTW Ceres IP67 Crimp Terminal Field Installable

For Your Easy Wiring And Quick Assembly



Applications:

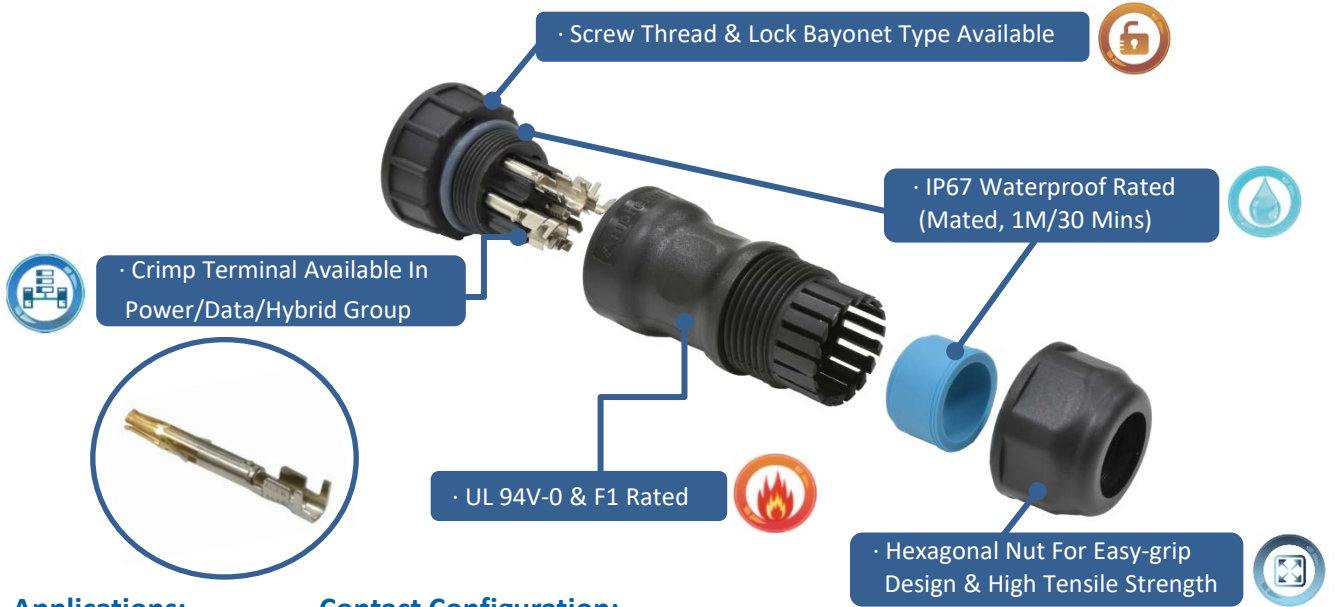

Lift & Materials Handling



Heavy Vehicle



Broadband Wireless Access

Contact Configuration:

Size	Current	Pin #	2	3	4	5	6	7	8	9	10	12	14	18
			Standard (B)	5A (BD)	●	●	●	●	●	●	●	●		
10A (BB)	●	●		●										
Middle (C)	5A (CD)							●	●	●	●	●	●	●
	10A (CB)			●	●	●								
	20A (CC)	●	●											
	10A+5A (CBD)								●					
Large (D)	5A (DD/DSD)													●
	20A (DC)	●	●	●	●	●	●	●						
	20A+5A (DCD)											●		

● Available Now

Specification:

Current Rating	5A / 10A / 20A / 10A+5A / 20A+5A	Cable OD for Different Seals	B Size	Red: 5.0 ~ 6.0mm Yellow: 6.0 ~ 8.0mm Blue: 8.0 ~ 10.0mm
Voltage Rating	300 V AC/DC		C Size	Red: 6.0 ~ 8.0mm Yellow: 8.0 ~ 10.0mm Blue: 10.0 ~ 12.0mm
Temperature Range	-40 °C ~ 105°C		D Size	Red: 8.0 ~ 10.0mm Yellow: 10.0 ~ 12.0mm Blue: 12.0 ~ 14.0mm
Waterproof Rating	IP67		Housing	Thermoplastic, UL Recognized
Recommended Wire Gauge	B Size: 16AWG ~ 20AWG C Size: 12AWG ~ 20AWG D Size: 12AWG ~ 20AWG	Material	Seal	Rubber, UL Recognized
Safety Compliance	UL Recognize			

B.C.E. s.r.l.

Via Regina Pacis, 54/c - 41049 SASSUOLO (MO) Italy

Tel. +39 0536 811.616 r.a. - Fax +39 0536 811.500

www.bce.it - E-mail: bce@bce.it

Sales & Marketing | Email: bce@bce.it

Copyright © 2019

5F-3, No. 51, Section 4, Zhongyang Road, Tucheng District, New Taipei City 236 Taiwan

Innovation In Waterproof Solutions